
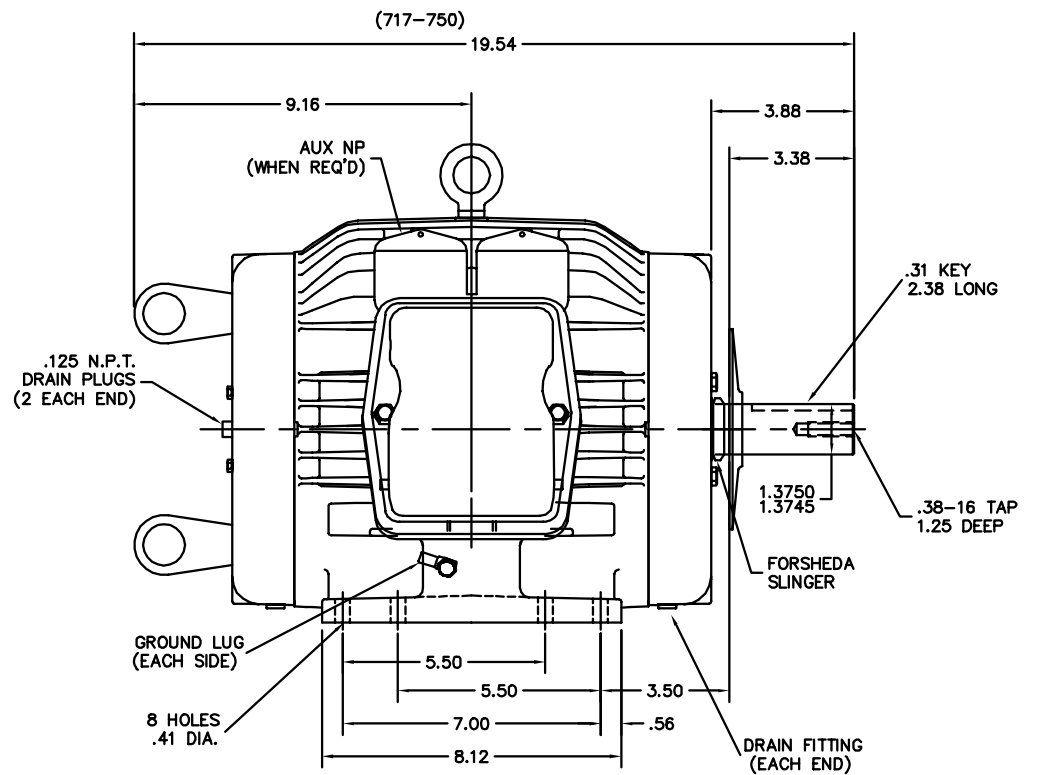


APPLY SEALER
 TO SEAL O.D.
 BEFORE PRESSING IN

PULLEY END DETAIL

NOTE:
 FOR VERTICAL SHAFT UP LIFTING,
 REMOVE EYE BOLT FROM TOP OF MOTOR
 AND SCREW INTO END OF SHAFT

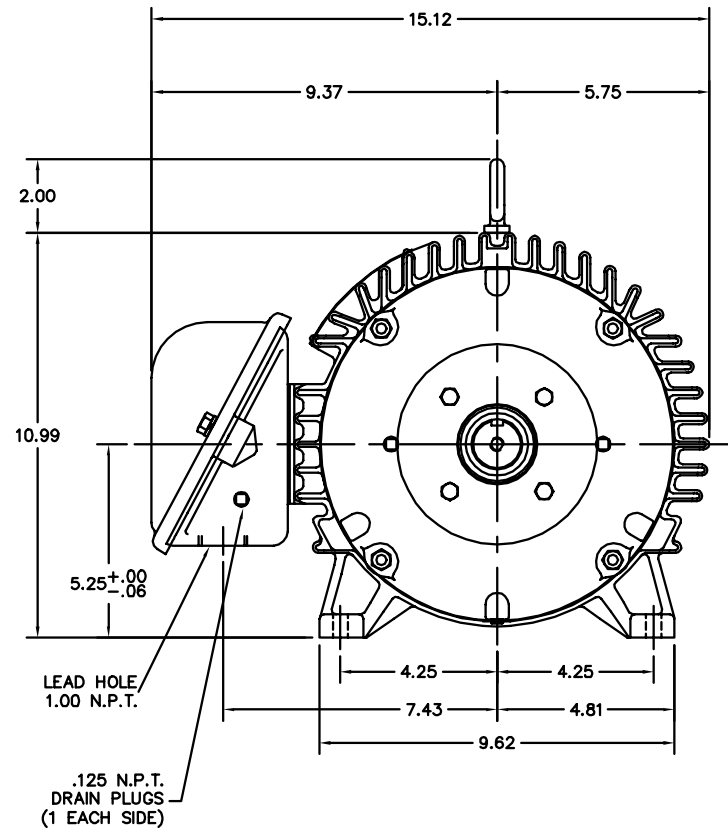

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: REPLACE 07SH2887 W/07SH2955

REV. LTR: A

VERSION: 01

TDR: 000000964179

FILE: \AAA\00220\883

REVISED: 08:26:01 02/02/2016

BY: ENALEMO

MTL: -



BALDOR

HOR 213-5T TEAO CP COOL TOWER, LIFT, SLD BRGS, SEAL, DOME SL

SH 1 of 1