



Project		Location	
Department/Author	Customer name	Customer ref.	Item name
Our ref.	Rev/Changed by	Date of issue	Saving ident
			Pages 1(3)

No.	Definition	Data	Unit	Remarks
1	Product	<b>TEFC, 3-phase, squirrel cage induction motor</b>		
2	Product code	<b>MVM07374D-AP (3GAA072312-BSE+332)</b>		
3	Type/Frame	<b>M3AA 71 B 4</b>		
4	Mounting	<b>IM3001, B5(flange)</b>		
5	Rated output P <sub>N</sub>	<b>0.37</b>	kW	
6	Service factor	<b>1</b>		
7	Type of duty	<b>S1(IEC) 100%</b>		
8	Rated voltage U <sub>N</sub>	<b>230</b>	VD	± 5 % (IEC 60034-1)
9	Rated frequency f <sub>N</sub>	<b>50</b>	Hz	± 2 % (IEC 60034-1)
10	Rated speed n <sub>N</sub>	<b>1375</b>	r/min	
11	Rated current I <sub>N</sub>	<b>1.68</b>	A	
12	No-load current	<b>1.15</b>	A	
13	Starting current I <sub>s</sub> /I <sub>N</sub>	<b>3.8</b>		Fullfilled IEC 60034-12 design N,H
14	Nominal torque T <sub>N</sub>	<b>2.6</b>	Nm	
15	Locked rotor torque T <sub>S</sub> /T <sub>N</sub>	<b>2</b>		
16	Maximum torque T <sub>max</sub> /T <sub>N</sub>	<b>2.2</b>		
17	Minimum torque T <sub>min</sub> /T <sub>N</sub>	<b>1.8</b>		
18	Speed at minimum torque	<b>240</b>	r/min	
19	Load characteristics (IEC 60034-2-1:2007)	Load %	Current A	Efficiency %
20	PLL determined from residual loss	<b>100</b>	<b>1.68</b>	<b>69.7</b>
21		<b>75</b>	<b>1.36</b>	<b>71.9</b>
22		<b>50</b>	<b>1.1</b>	<b>71.1</b>
23		<b>Start</b>	<b>6.4</b>	<b>0.8</b>
24	Maximum starting time from hot	<b>20</b>	s	
25	Maximum starting time from cold	<b>36</b>	s	
26	Insulation class / Temperature class	<b>F / B</b>		
27	Ambient temperature	<b>40</b>	°C	
28	Altitude	<b>1000</b>	m.a.s.l.	
29	Enclosure	<b>IP55</b>		
30	Cooling system	<b>IC411 self ventilated</b>		
31	Bearing DE/NDE	<b>6203-2Z/C3 - 6202-2Z/C3</b>		
32	Type of Grease	<b>Greased for life</b>		
33	Sound pressure level (LP dB(A) 1m)	<b>45</b>	dB(A)	at load
34	Moment of inertia J = ¼ GD2	<b>0.0008</b>	kg-m2	
35	Balancing	<b>Half Key</b>		
36	Vibration class	<b>Grade A</b>		
37	Position of terminal box	<b>Top</b>		
38	Terminal box entries; no, dimens.	<b>2xM20</b>		
39	Number of power terminals	<b>6</b>		
40	Direction of rotation	<b>CW or CCW</b>		
41	Weight of rotor	<b>2</b>	kg	
42	Total weight of motor	<b>6</b>	kg	
43				

**Variant Codes / Definition**


332 = Baldor catalog number

Remarks:

Data based on situation 4/4/2012


All data subject to tolerances in accordance with IEC

Guaranteed values on request


<b>ABB Motors and Generators</b>	<b>Load Curves</b>		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name
Our ref.	Rev/Changed by	Date of issue	Saving ident
			Pages <b>2(3)</b>

**Product** TEFC, 3-phase, squirrel cage induction motor  
**Type/Frame** M3AA 71 B 4  
**Product code** MVM07374D-AP  
**Rated output P<sub>N</sub>** 0.37 kW  
**Type of duty** S1(IEC) 100%

**Voltage (V)** 230                      **Current I<sub>N</sub> (A)** 1.68                      **Power factor at P<sub>N</sub>** 0.79  
**Frequency (Hz)** 50                      **Speed (r/min)** 1375                      **Efficiency (%) at P<sub>N</sub>** 69.7

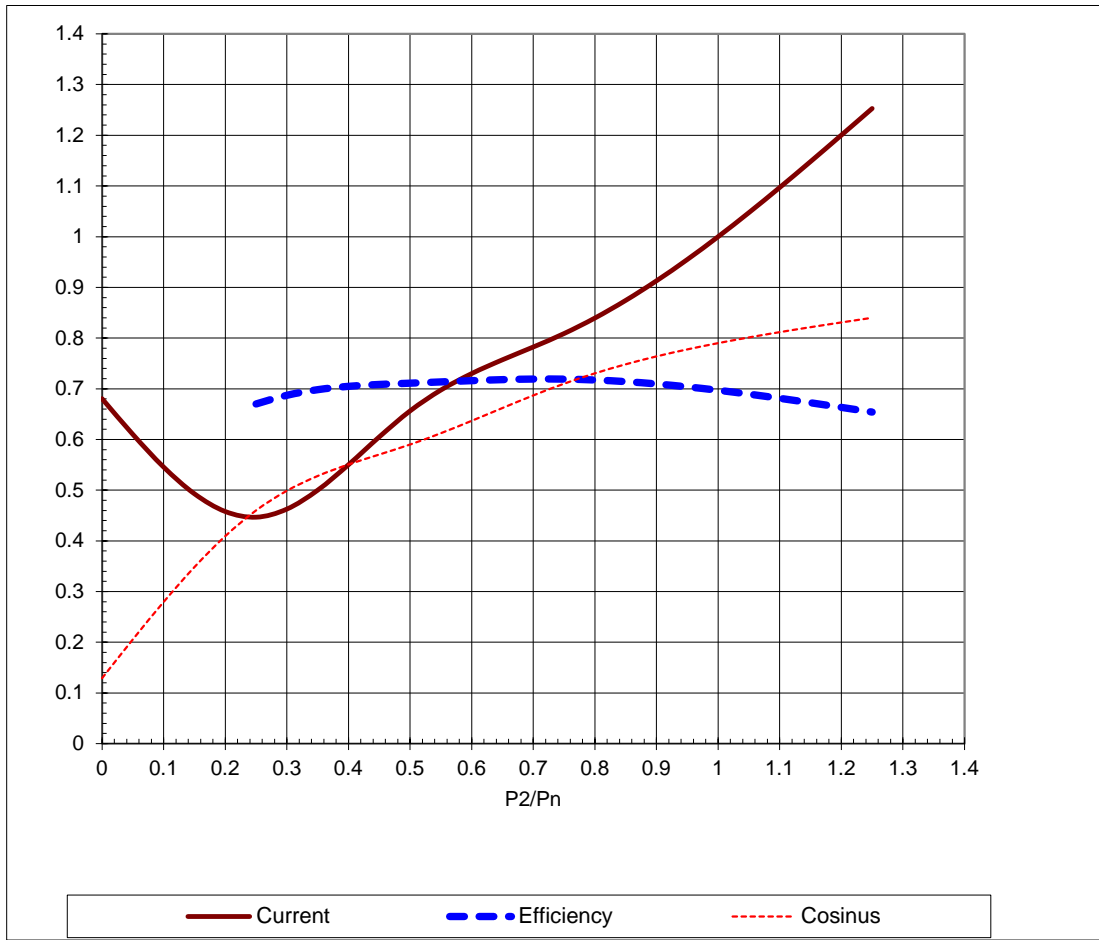

Load characteristics (IEC 60034-2-1:2007)  
 Data based on situation 4/4/2012  
 All data subject to tolerances in accordance with IEC

ABB Motors and Generators	Starting Curves			
	Project	Location		
Department/Author	Customer name	Customer ref.	Item name	
Our ref.	Rev/Changed b Date of issue	Saving ident	Pages <b>3(3)</b>	
Type of product	<b>TEFC, 3-phase, squirrel cage induction motor</b>			
Type/Frame	<b>M3AA 71 B 4</b>			
Product code	<b>MVM07374D-AP</b>	Frequency (Hz)	<b>50</b>	
Rated output P <sub>N</sub>	<b>0.37 kW</b>	Rated current I <sub>N</sub>	<b>1.68</b>	A
Type of duty	<b>S1(IEC) 100%</b>			
J <sub>motor</sub> (kgm <sup>2</sup> )	<b>0.0008</b>	Voltage (V) 100%	<b>230</b>	Voltage (V) <b>230V(100%)</b>
J <sub>load</sub> (kgm <sup>2</sup> )		T <sub>start</sub> /T <sub>N</sub>	<b>2</b>	T <sub>start</sub> /T <sub>N</sub> <b>2</b>
Speed (r/min)	<b>1375</b>	Starting time (s)		Run-up time (s)
T <sub>N</sub> (Nm)	<b>2.6</b>	Speed (r/min)		Speed (r/min)
T <sub>load</sub> (Nm)		I <sub>s</sub> /I <sub>n</sub>	<b>3.8</b>	I <sub>s</sub> /I <sub>n</sub> <b>3.8</b>
Nbr. of consecutive starts		T <sub>max</sub> /T <sub>n</sub>	<b>2.2</b>	T <sub>max</sub> /T <sub>n</sub> <b>2.2</b>

Legend:

- TMotorUn 230V
- TMotorU2 230V(100%)
- - - IMotorUn 230V
- - - IMotorU2 230V(100%)

Load characteristics (IEC 60034-2-1:2007)  
Data based on situation 4/4/2012  
All data subject to tolerances in accordance with IEC



Project		Location	
Department/Author	Customer name	Customer ref.	Item name
Our ref.	Rev/Changed by	Date of issue	Saving ident
			Pages 1(3)


No.	Definition	Data	Unit	Remarks
1	Product	<b>TEFC, 3-phase, squirrel cage induction motor</b>		
2	Product code	<b>MVM07374D-AP (3GAA072312-BSE+332)</b>		
3	Type/Frame	<b>M3AA 71 B 4</b>		
4	Mounting	<b>IM3001, B5(flange)</b>		
5	Rated output P <sub>N</sub>	<b>0.37</b>	kW	
6	Service factor	<b>1</b>		
7	Type of duty	<b>S1(IEC) 100%</b>		
8	Rated voltage U <sub>N</sub>	<b>400</b>	VY	± 5 % (IEC 60034-1)
9	Rated frequency f <sub>N</sub>	<b>50</b>	Hz	± 2 % (IEC 60034-1)
10	Rated speed n <sub>N</sub>	<b>1375</b>	r/min	
11	Rated current I <sub>N</sub>	<b>0.96</b>	A	
12	No-load current	<b>0.66</b>	A	
13	Starting current I <sub>s</sub> /I <sub>N</sub>	<b>3.8</b>		Fullfilled IEC 60034-12 design N,H
14	Nominal torque T <sub>N</sub>	<b>2.6</b>	Nm	
15	Locked rotor torque T <sub>S</sub> /T <sub>N</sub>	<b>2</b>		
16	Maximum torque T <sub>max</sub> /T <sub>N</sub>	<b>2.2</b>		
17	Minimum torque T <sub>min</sub> /T <sub>N</sub>	<b>1.8</b>		
18	Speed at minimum torque	<b>240</b>	r/min	
19	Load characteristics (IEC 60034-2-1:2007)	Load %	Current A	Efficiency %
20	PLL determined from residual loss	<b>100</b>	<b>0.96</b>	<b>69.7</b>
21		<b>75</b>	<b>0.78</b>	<b>71.9</b>
22		<b>50</b>	<b>0.63</b>	<b>71.1</b>
23		<b>Start</b>	<b>3.6</b>	<b>0.8</b>
24	Maximum starting time from hot	<b>20</b>	s	
25	Maximum starting time from cold	<b>36</b>	s	
26	Insulation class / Temperature class	<b>F / B</b>		
27	Ambient temperature	<b>40</b>	°C	
28	Altitude	<b>1000</b>	m.a.s.l.	
29	Enclosure	<b>IP55</b>		
30	Cooling system	<b>IC411 self ventilated</b>		
31	Bearing DE/NDE	<b>6203-2Z/C3 - 6202-2Z/C3</b>		
32	Type of Grease	<b>Greased for life</b>		
33	Sound pressure level (LP dB(A) 1m)	<b>45</b>	dB(A)	at load
34	Moment of inertia J = ¼ GD2	<b>0.0008</b>	kg-m2	
35	Balancing	<b>Half Key</b>		
36	Vibration class	<b>Grade A</b>		
37	Position of terminal box	<b>Top</b>		
38	Terminal box entries; no, dimens.	<b>2xM20</b>		
39	Number of power terminals	<b>6</b>		
40	Direction of rotation	<b>CW or CCW</b>		
41	Weight of rotor	<b>2</b>	kg	
42	Total weight of motor	<b>6</b>	kg	
43				

**Variant Codes / Definition**

332 = Baldor catalog number


**Remarks:**

Data based on situation 4/4/2012  
 All data subject to tolerances in accordance with IEC  
 Guaranteed values on request


<b>ABB Motors and Generators</b>	<b>Load Curves</b>		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name
Our ref.	Rev/Changed by	Date of issue	Saving ident
			Pages <b>2(3)</b>

**Product** TEFC, 3-phase, squirrel cage induction motor  
**Type/Frame** M3AA 71 B 4  
**Product code** MVM07374D-AP  
**Rated output P<sub>N</sub>** 0.37 kW  
**Type of duty** S1(IEC) 100%

**Voltage (V)** 400      **Current I<sub>N</sub> (A)** 0.96      **Power factor at P<sub>N</sub>** 0.79  
**Frequency (Hz)** 50      **Speed (r/min)** 1375      **Efficiency (%) at P<sub>N</sub>** 69.7

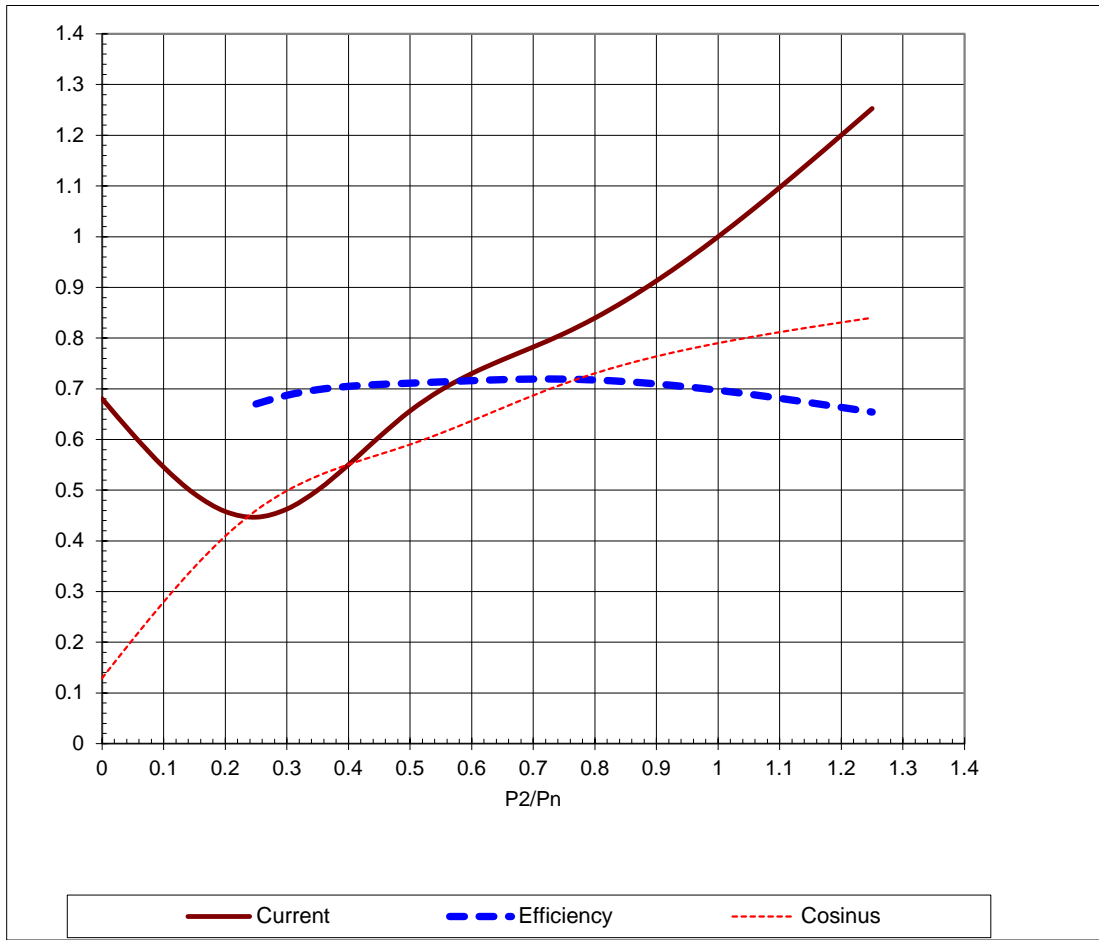

Load characteristics (IEC 60034-2-1:2007)  
 Data based on situation 4/4/2012  
 All data subject to tolerances in accordance with IEC

ABB Motors and Generators	Starting Curves			
	Project	Location		
Department/Author	Customer name	Customer ref.	Item name	
Our ref.	Rev/Changed b Date of issue	Saving ident	Pages <b>3(3)</b>	
Type of product	<b>TEFC, 3-phase, squirrel cage induction motor</b>			
Type/Frame	<b>M3AA 71 B 4</b>			
Product code	<b>MVM07374D-AP</b>	Frequency (Hz)	<b>50</b>	
Rated output P <sub>N</sub>	<b>0.37 kW</b>	Rated current I <sub>N</sub>	<b>0.96</b>	A
Type of duty	<b>S1(IEC) 100%</b>			
J <sub>motor</sub> (kgm <sup>2</sup> )	<b>0.0008</b>	Voltage (V) 100%	<b>400</b>	Voltage (V) <b>400V(100%)</b>
J <sub>load</sub> (kgm <sup>2</sup> )		T <sub>start</sub> /T <sub>N</sub>	<b>2</b>	T <sub>start</sub> /T <sub>N</sub> <b>2</b>
Speed (r/min)	<b>1375</b>	Starting time (s)		Run-up time (s)
T <sub>N</sub> (Nm)	<b>2.6</b>	Speed (r/min)		Speed (r/min)
T <sub>load</sub> (Nm)		I <sub>s</sub> /I <sub>n</sub>	<b>3.8</b>	I <sub>s</sub> /I <sub>n</sub> <b>3.8</b>
Nbr. of consecutive starts		T <sub>max</sub> /T <sub>n</sub>	<b>2.2</b>	T <sub>max</sub> /T <sub>n</sub> <b>2.2</b>

Legend:

- TMotorUn 400V
- TMotorU2 400V(100%)
- - - IMotorUn 400V
- - - IMotorU2 400V(100%)

Load characteristics (IEC 60034-2-1:2007)  
Data based on situation 4/4/2012  
All data subject to tolerances in accordance with IEC



Project		Location	
Department/Author	Customer name	Customer ref.	Item name
Our ref.	Rev/Changed by	Date of issue	Saving ident
			Pages 1(3)

No.	Definition	Data	Unit	Remarks
1	Product	<b>TEFC, 3-phase, squirrel cage induction motor</b>		
2	Product code	<b>MVM07374D-AP (3GAA072312-BSE+332)</b>		
3	Type/Frame	<b>M3AA 71 B 4</b>		
4	Mounting	<b>IM3001, B5(flange)</b>		
5	Rated output P <sub>N</sub>	<b>0.37</b>	kW	
6	Service factor	<b>1</b>		
7	Type of duty	<b>S1(IEC) 100%</b>		
8	Rated voltage U <sub>N</sub>	<b>460</b>	VY	± 5 % (IEC 60034-1)
9	Rated frequency f <sub>N</sub>	<b>60</b>	Hz	± 2 % (IEC 60034-1)
10	Rated speed n <sub>N</sub>	<b>1695</b>	r/min	
11	Rated current I <sub>N</sub>	<b>0.86</b>	A	
12	No-load current	<b>0.6</b>	A	
13	Starting current I <sub>s</sub> /I <sub>N</sub>	<b>5.3</b>		Fullfilled IEC 60034-12 design N,H
14	Nominal torque T <sub>N</sub>	<b>2.1</b>	Nm	
15	Locked rotor torque T <sub>S</sub> /T <sub>N</sub>	<b>2.2</b>		
16	Maximum torque T <sub>max</sub> /T <sub>N</sub>	<b>2.6</b>		
17	Minimum torque T <sub>min</sub> /T <sub>N</sub>	<b>2.1</b>		
18	Speed at minimum torque	<b>288</b>	r/min	
19	Load characteristics (IEC 60034-2-1:2007)	Load %	Current A	Efficiency %
20	PLL determined from residual loss	100	<b>0.86</b>	<b>74.4</b>
21		75	<b>0.75</b>	<b>74.9</b>
22		50	<b>0.65</b>	<b>71.9</b>
23		Start	<b>4.5</b>	<b>0.78</b>
24	Maximum starting time from hot	<b>20</b>	s	
25	Maximum starting time from cold	<b>36</b>	s	
26	Insulation class / Temperature class	<b>F / B</b>		
27	Ambient temperature	<b>40</b>	°C	
28	Altitude	<b>1000</b>	m.a.s.l.	
29	Enclosure	<b>IP55</b>		
30	Cooling system	<b>IC411 self ventilated</b>		
31	Bearing DE/NDE	<b>6203-2Z/C3 - 6202-2Z/C3</b>		
32	Type of Grease	<b>Greased for life</b>		
33	Sound pressure level (LP dB(A) 1m)	<b>52</b>	dB(A)	at load
34	Moment of inertia J = ¼ GD2	<b>0.0008</b>	kg-m2	
35	Balancing	<b>Half Key</b>		
36	Vibration class	<b>Grade A</b>		
37	Position of terminal box	<b>Top</b>		
38	Terminal box entries; no, dimens.	<b>2xM20</b>		
39	Number of power terminals	<b>6</b>		
40	Direction of rotation	<b>CW or CCW</b>		
41	Weight of rotor	<b>2</b>	kg	
42	Total weight of motor	<b>6</b>	kg	
43				

**Variant Codes / Definition**


332 = Baldor catalog number

Remarks:

Data based on situation 4/4/2012


All data subject to tolerances in accordance with IEC

Guaranteed values on request


<b>ABB Motors and Generators</b>	<b>Load Curves</b>		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name
Our ref.	Rev/Changed by	Date of issue	Saving ident
			Pages <b>2(3)</b>

**Product** TEFC, 3-phase, squirrel cage induction motor  
**Type/Frame** M3AA 71 B 4  
**Product code** MVM07374D-AP  
**Rated output P<sub>N</sub>** 0.37 kW  
**Type of duty** S1(IEC) 100%

**Voltage (V)** 460      **Current I<sub>N</sub> (A)** 0.86      **Power factor at P<sub>N</sub>** 0.72  
**Frequency (Hz)** 60      **Speed (r/min)** 1695      **Efficiency (%) at P<sub>N</sub>** 74.4

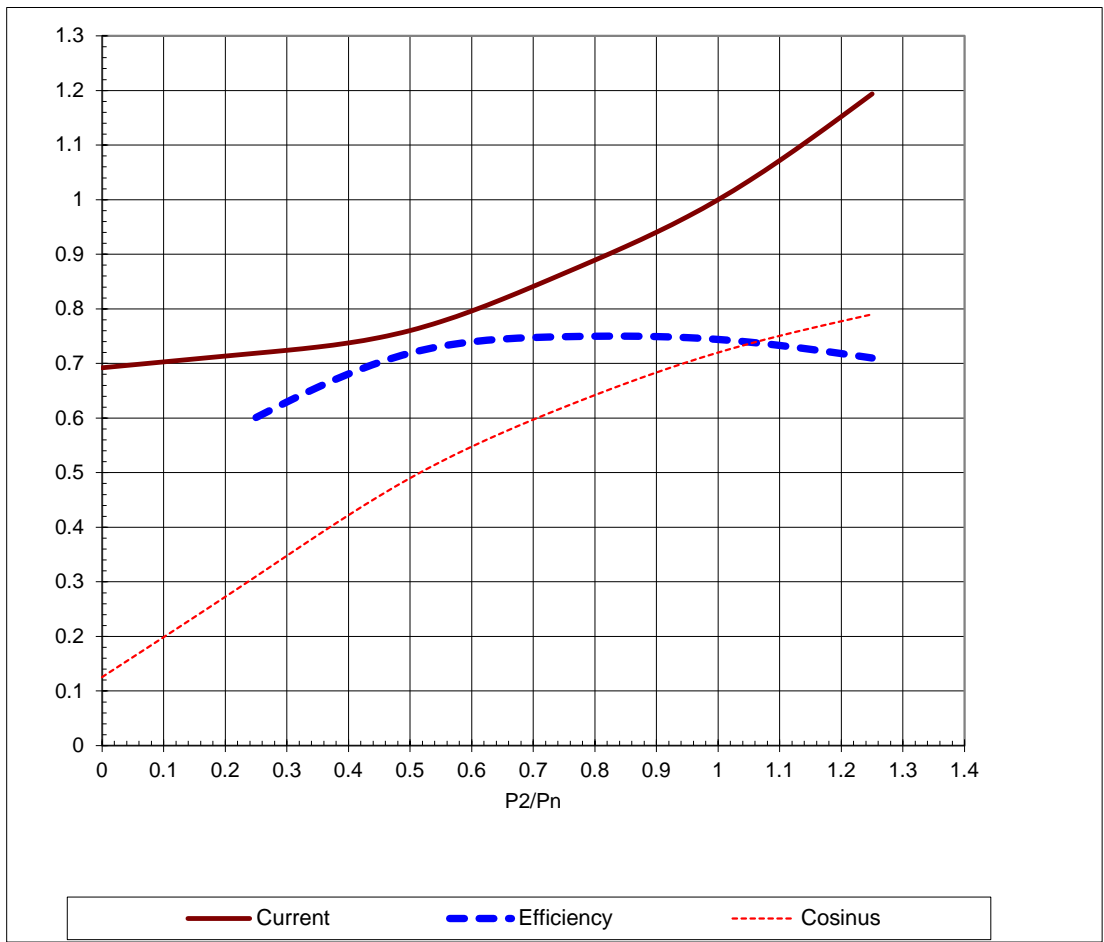


Load characteristics (IEC 60034-2-1:2007)  
 Data based on situation 4/4/2012  
 All data subject to tolerances in accordance with IEC

<b>ABB Motors and Generators</b>	<b>Starting Curves</b>		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name
Our ref.	Rev/Changed b Date of issue	Saving ident	Pages <b>3(3)</b>

Type of product	<b>TEFC, 3-phase, squirrel cage induction motor</b>		
Type/Frame	<b>M3AA 71 B 4</b>		
Product code	<b>MVM07374D-AP</b>	Frequency (Hz)	<b>60</b>
Rated output P <sub>N</sub>	<b>0.37 kW</b>	Rated current I <sub>N</sub>	<b>0.86 A</b>
Type of duty	<b>S1(IEC) 100%</b>		

J <sub>motor</sub> (kgm <sup>2</sup> )	<b>0.0008</b>	Voltage (V) 100%	<b>460</b>	Voltage (V)	<b>460V(100%)</b>
J <sub>load</sub> (kgm <sup>2</sup> )		T <sub>start</sub> /T <sub>N</sub>	<b>2.2</b>	T <sub>start</sub> /T <sub>N</sub>	<b>2.2</b>
Speed (r/min)	<b>1695</b>	Starting time (s)		Run-up time (s)	
T <sub>N</sub> (Nm)	<b>2.1</b>	Speed (r/min)		Speed (r/min)	
T <sub>load</sub> (Nm)		I <sub>s</sub> /I <sub>n</sub>	<b>5.3</b>	I <sub>s</sub> /I <sub>n</sub>	<b>5.3</b>
Nbr. of consecutive starts		T <sub>max</sub> /T <sub>n</sub>	<b>2.6</b>	T <sub>max</sub> /T <sub>n</sub>	<b>2.6</b>

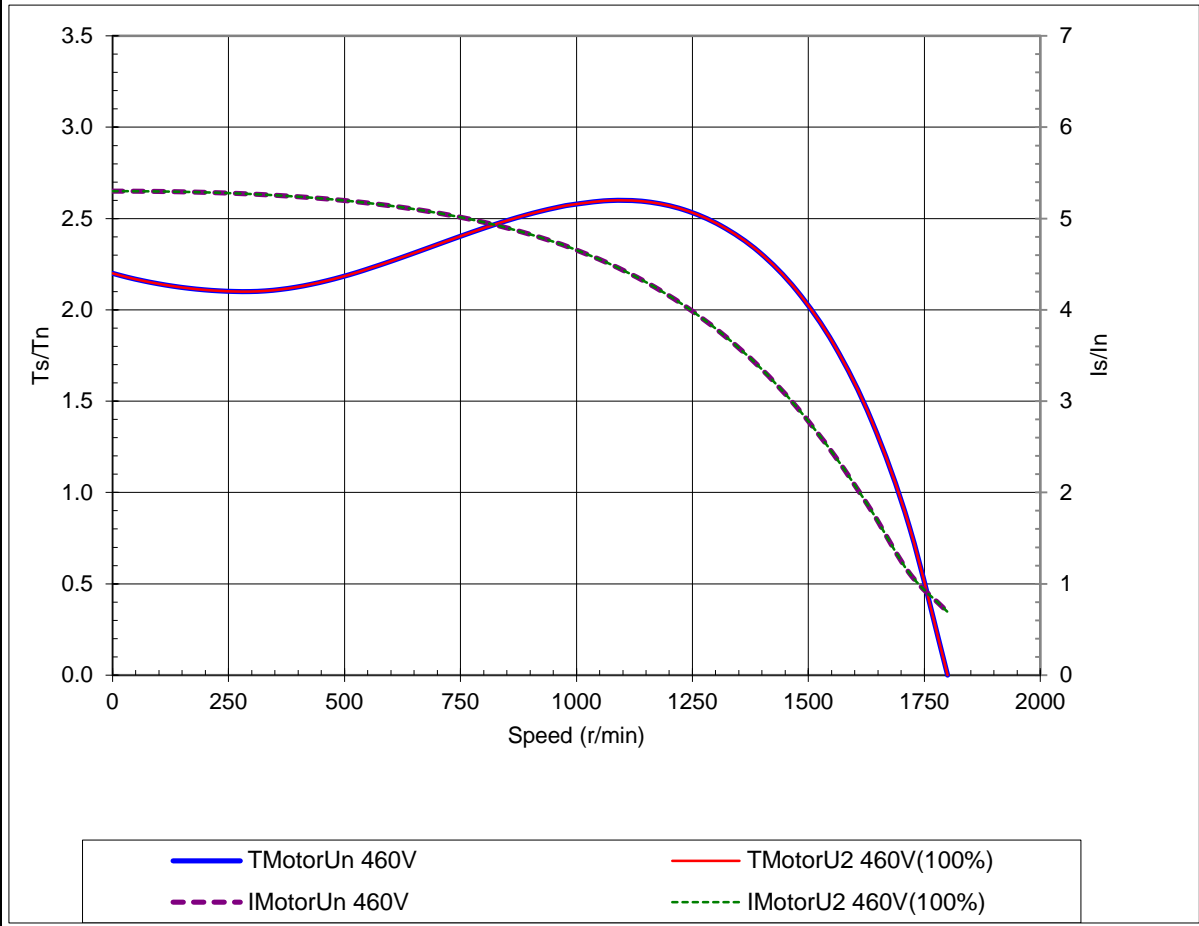

Load characteristics (IEC 60034-2-1:2007)  
 Data based on situation 4/4/2012  
 All data subject to tolerances in accordance with IEC