



Product Information Packet

SUM70504-4

5HP,1725RPM,3PH,60HZ,180TY,TENV,FOOTLES

Part Detail							
Revision:	-	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Elec. Spec:	E02261H AG024	CD Diagram:	416820-001	Mfg Plant:	
Mech. Spec:		Layout:	066930-500	Poles:	04	Created Date:	04-09-2015
Base:		Eff. Date:	04-13-2015	Leads:			

Specs			
Catalog Number:	SUM70504-4	Duty Rating:	15 MIN
Enclosure:	XPNV	Heater Indicator:	No Heater
Frame:	180TY	Insulation Class:	F
Frame Material:	Iron	Inverter Code:	Inverter Ready
Output @ Frequency:	5.000 @ 60 HZ	KVA Code:	H
Voltage @ Frequency:	230 V @ 60 HZ	Lifting Lugs:	Vertical Lifting Lugs
	460 V @ 60 HZ	Motor Type:	M
XP Class and Group:	CLI GP C,D	Mounting Arrangement:	V1
XP Division:	Division I	Product Family:	Other
Agency Approvals:	CCSA US	Pulley End Bearing Type:	Ball
	CSA	Pulley Face Code:	P-Base
	UL	Shaft Rotation:	Reversible
Base Indicator:	No Mounting	Shaft Slinger Indicator:	No Slinger
Bearing Grease Type:	Polyrex EM (-20F +300F)	Speed Code:	Single Speed
Current @ Voltage:	14.0 A @ 230 V	Motor Standards:	NEMA
	7.00 A @ 460 V	Starting Method:	Direct on line
Design Code:	B	Thermal Device - Winding:	Normally Closed Thermostat
Drip Cover:	No Drip Cover	XP Temp Code:	T3C

Nameplate 000613007AC		
CLASS I GROUP	C D X	NO.
CLASS II GROUP	X X X	
OPERATING TEMP CODE	T3C	

Nameplate 000613007MN										
CAT NO	SUM70504-4		SPEC NO.	P18G2702						
HP	5	AMPS	14.0/7.00		VOLTS	230/ 460		DESIGN	B	
FRAME SIZE	X0180TY		RPM	1725		HZ	60	AMB	40	
D.E. BRG.	50BC02JPP30A			PH	3	DUTY	*			
O.D.E. BRG.	25BC02JPG30A			TYPE	P	ENCL	TENV			
				POWER FACTOR				NEMA-NOM-EFF		
				MAX CORR KVAR				GUARANTEED EFFICIENCY		
				NEMA NOM/CSA QUOTED EFF @				100% LOAD		
SER.NO.					MOTOR WEIGHT	250	LBS.			
	*15 MIN IN AIR ;SUB.IN									
	WATER/SEWAGE ONLY SEE MANUAL									
	FOR MAXDEPTH ;FINAL CONN 460V;									


Nameplate 000613007MR

CAT NO	SUM70504-4	SPEC NO.	P18G2702		
HP	5	AMPS	14.0/7.00	VOLTS	230/ 460
FRAME SIZE	X0180TY	RPM	1725	HZ	60
D.E. BRG.	50BC02JPP30A	PH	3	AMB	40
O.D.E. BRG.	25BC02JPG30A	TYPE	P	DUTY	*
		ENCL	TENV	INSUL	F
		POWER FACTOR		CODE	H
		MAX CORR KVAR		NEMA-NOM-EFF	
				GUARANTEED EFFICIENCY	
				100% LOAD	
SER.NO.		NEMA NOM/CSA QUOTED EFF @			
		MOTOR WEIGHT	250	LBS.	
	*15 MIN IN AIR ;SUB.IN				
	WATER/SEWAGE ONLY SEE MANUAL				
	FOR MAXDEPTH ;FINAL CONN 460V;				

Parts List		
Part Number	Description	Quantity
SA297478	SA P18G2702	1.000 EA
RA284447	RA P18G2702	1.000 EA
000613007AC	UL NAMEPLATE FOR HAZARDOUS LOCATIONS	1.000 EA
000613007MN	NP,MEDIUM AC,NO CERT,STD INDUSTRIAL	1.000 EA
000613007MR	NP, MEDIUM AC, CSA, STD INDUSTRIAL	1.000 EA
000692000EJ	NAME PLATE	1.000 EA
000901001AA	LABEL WARNING	1.000 EA
001575000A	WIRING DIAGRAM	1.000 EA
424476003WB	WIRING DIAGRAM MEDIUMA	1.000 EA
034692002AE	HCSPP 1/4" 304 S.S.	1.000 EA
004824015A	GREASE POLYREX EM	0.100 LB
032018010CG	HHCS 3/8-16X1-1/4L 316SS	4.000 EA
032130008CC	HSHCS 3/8-16 X 1.00" L	4.000 EA
032620020JD	HSSS 10-24X5/8L 304S.S.	1.000 EA
034692003AE	PPLG 3/8" 304 S.S.	2.000 EA
047174005B	SNAP RING	1.000 EA
047174005C	SNAP RING	1.000 EA
064262012B	SEAL	1.000 EA
064262012C	SEAL	1.000 EA
088204001AA	BRKT,DE,180SUB 88204-1WA	1.000 EA
088205001AA	SUB PLT 180 88205-1WC	1.000 EA
413412004A	SUBM MOISTURE PROBE	2.000 EA
413412005R	LEAD WIRE ASSY(BLANKET	1.000 EA
413480001R	RESISTOR ASSEMBLY-BLANKET	1.000 EA


Parts List (continued)		
Part Number	Description	Quantity
421900124FU	ORING	1.000 EA
421900124FU	ORING	1.000 EA
603760001AA	LABYRINTH	1.000 EA
032018006BM	HHCS 5/16-18X3/4 PLTGRN.	1.000 EA
032018006BM	HHCS 5/16-18X3/4 PLTGRN.	1.000 EA
032018008BG	HHCS 5/16-18X1 BRASS-447	4.000 EA
032080003JB	HWHMS 10-24X3/8L PLTED	4.000 EA
032080003LB	HWHMS 1/4-20X3/8L PLTED	6.000 EA
034036013AB	LCKW 5/16 EXT.TOOTH LCKW	1.000 EA
047024003AH	T/LUG AMP 34112	4.000 EA
047024003B	T/LUG AMP 33218	9.000 EA
415031017A	NUT W/WASHER 10-24 C.PLT	4.000 EA
415031017B	NUT W/WASHER1/4-20 C.P	6.000 EA
421900072FU	ORING	1.000 EA
609181014D	HEAT SHRINK TUBING 3/4	10.000 EA
700385014F	CCA #12 25' 180	1.000 EA
004824007K	SPECIAL PAINT	0.100 EA
033775004EA	DRSCR #6-1/4 304 S.S.	4.000 EA
034180009DD	KEY 1/4X1/4X1-1/8L	1.000 EA
088203001AB	BRKT,ODE,180SUB 88203-1WB	1.000 EA
421900124FU	ORING	1.000 EA
004824018AF	SHELL ROTELLA OIL 10W	1.500 LB
032018006AG	HHCS 1/4-20X3/4L 316 SS	3.000 EA
032018010CG	HHCS 3/8-16X1-1/4L 316SS	4.000 EA


000901001AA	LABEL WARNING	1.000 EA
B3630-9	SUBM THERMOSTAT TAG	1.000 EA
B-3664002	TAG, (NON REGREASABLE)	1.000 EA

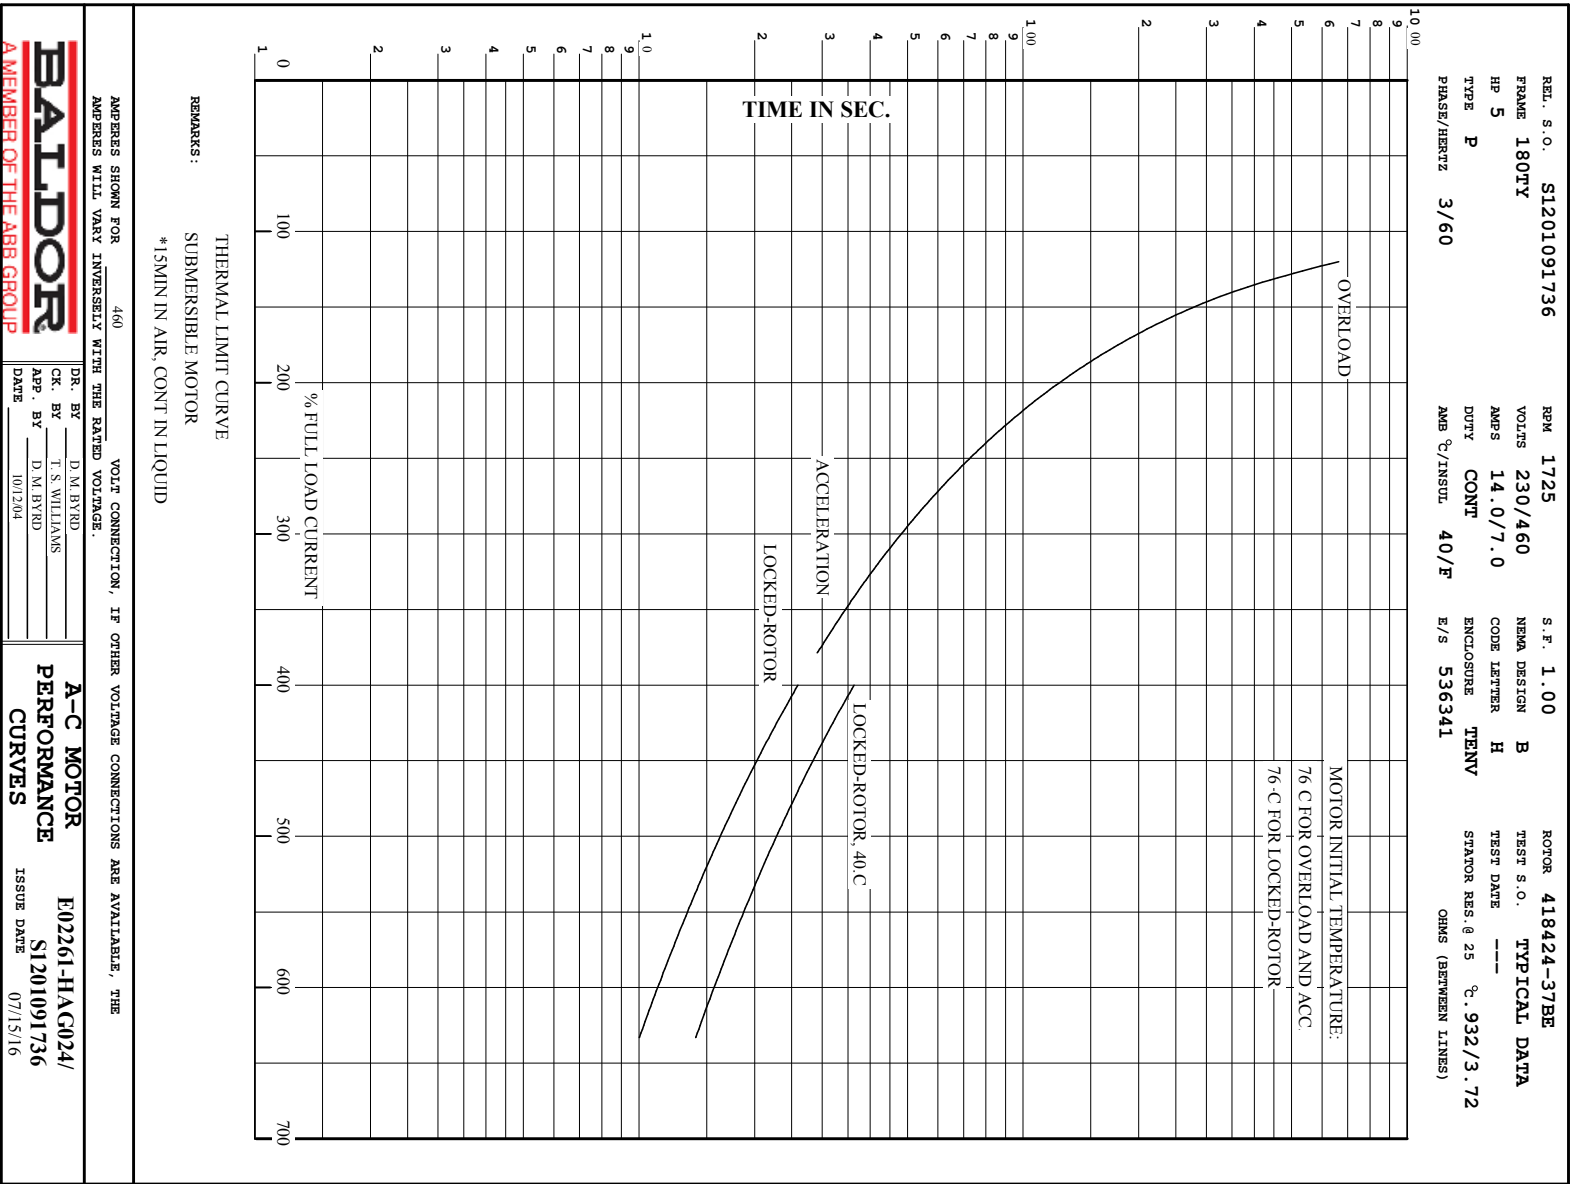

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
S1201091736	180TY	5	P	3/60	1725	230/460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
14.0/7.0	CONT	40/F	1.00	B	H	TENV
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
536341	418424-37BE	---	---	.932/3.72		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	INPUT KW	% POWER FACTOR	% EFFI- CIENCY
NO LOAD	0	2.7	1800	.444	20.5	0
1/4	1.25	3.3	1781	1.41	54.1	66.3
2/4	2.50	4.2	1765	2.42	71.9	77.0
3/4	3.75	5.5	1747	3.50	79.9	79.9
4/4	5.00	7.0	1727	4.65	83.9	80.2
5/4	6.25	8.6	1703	5.90	86.1	79.1
SPEED TORQUE						
	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	192	29.2	40.0		
PULL UP	350	173	26.3	38.0		
BREAKDOWN	1400	272	41.3	25.1		
FULL LOAD	1727	100	15.2	7.0		
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE REMARKS: TYPICAL DATA SUBMERSIBLE MOTOR *15MIN IN AIR, CONT IN LIQUID						



BALDOR A MEMBER OF THE ABB GROUP		DR. BY <u>D. M. BYRD</u> CK. BY <u>T. S. WILLIAMS</u> APP. BY <u>D. M. BYRD</u> DATE <u>10/12/04</u>	A-C MOTOR PERFORMANCE DATA E02261-HAG024/ S1201091736 ISSUE DATE 07/15/16
--	--	---	---



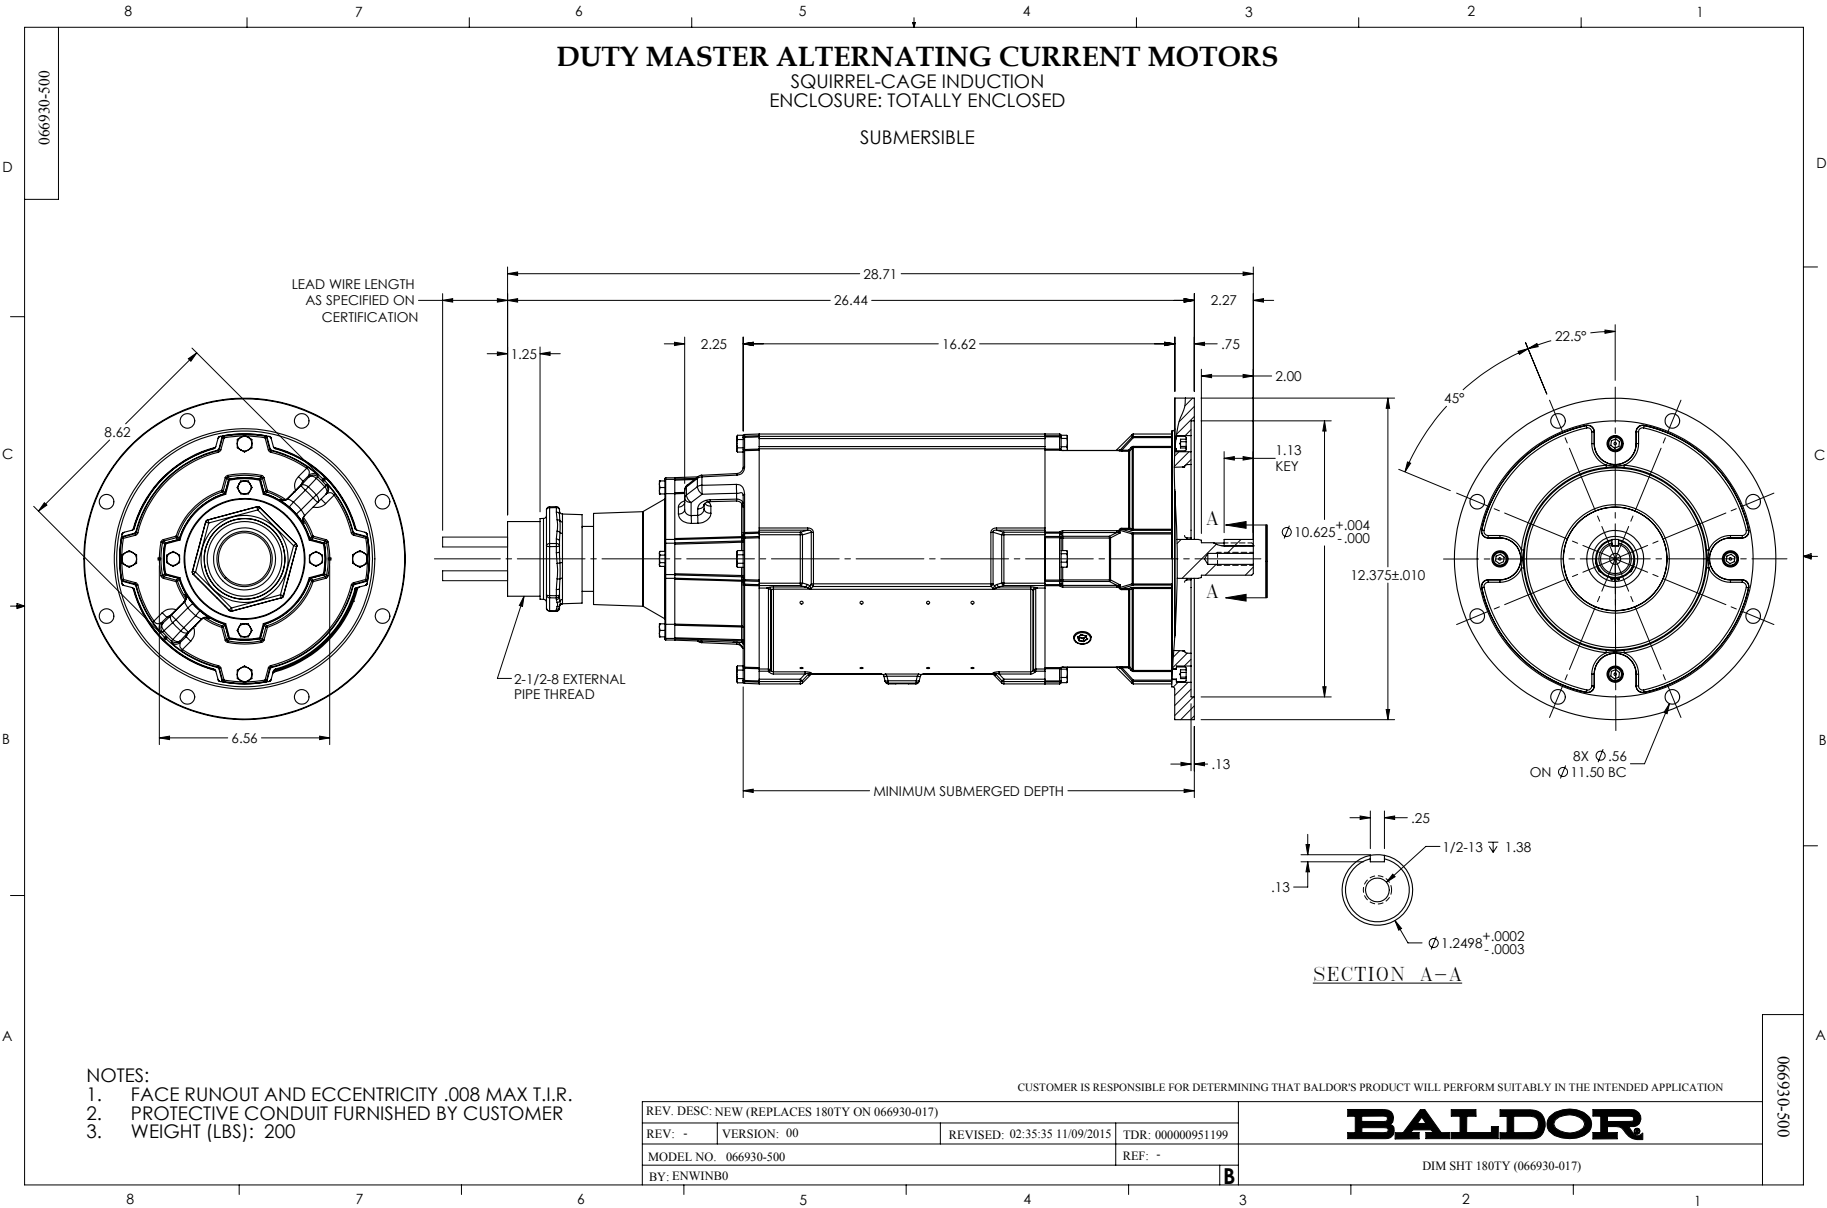

416820-001

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD Y CONNECTED

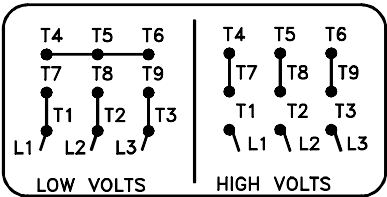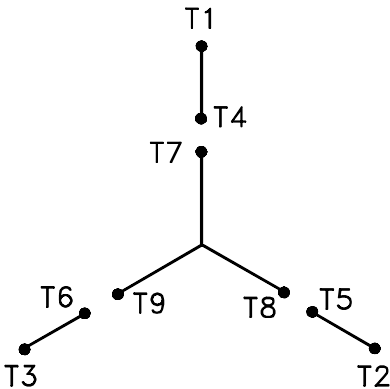

(N.P. 1575-A)

416820-001

REV. DESC: LOADED TO BUS, C/R 335225			BALDOR CONN DIAG - STANDARD 9 LEAD, Y CONNECTED SH 1 of 1
REV. LTR: -	VERSION: 00	TDR: 000000538207	
FILE: \MGA\00000\659		REVISED: 10:14:19 04/30/2010	
MTL: -		BY: RAGRA	