

**BALDOR • RELIANCE**

---

# Customer information packet

## XM32362T

30//25HP, 1180//980RPM, 3PH, 60//50HZ, 326T

Class - CLI GP D; CLII GP F,G

Division - Division I

## Specifications

Enclosure	XPFC
Frame	326T
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 50 HZ 30.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 50 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 380.0 V @ 50 HZ 230.0 V @ 60 HZ 190.0 V @ 50 HZ
Agency Approvals	CSA EEV UL
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	78.000 A @ 230.0 V 39.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.0 %
Electrically Isolated Bearing	Not Electrically Isolated

## Part detail

Revision	B
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	12WGY812
Layout	12LYL018
Eff. date	11-05-2024
CD Diagram	CD0005
Poles	06
Leads	9#8
Proprietary	False
Created date	03-23-2021

Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	39.0 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1264M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	32.00 IN
Power Factor	78
Product Family	Hazardous Location Motor
Pulley Face Code	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	2.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

**Nameplate**

**NP0887XPSLEV**

<b>NO.</b>		<b>CC</b>	010A		
<b>S/N</b>		<b>TEMP CODE</b>	T3C		
<b>SPEC.</b>	12-0000-2082	<b>INV.TYPE</b>	PWM		
<b>CAT.NO.</b>	XM32362T	<b>C HP FR</b>	60	<b>C HP TO</b>	90
<b>HP</b>	30//25	<b>CT HZ FROM</b>	6	<b>CT HZ TO</b>	60
<b>VOLTS</b>	230/460//190/380	<b>VT HZ FROM</b>	6	<b>VT HZ TO</b>	60
<b>AMPS</b>	78/39	<b>MAG CUR</b>	34.4/17.2		
<b>RPM</b>	1180//980	<b>MX RPM</b>	1800		
<b>HZ</b>	60//50	<b>PH</b>	3	<b>CL</b>	F
		<b>NOM.EFF.</b>	93		
<b>SER.F.</b>	1.00	<b>DES</b>	A	<b>SL HZ</b>	1
		<b>WK2</b>	12.2		
<b>FRAME</b>	326T	<b>RATING</b>	40C AMB-CONT		
	NEMA MG-1 PART 5, IP54				
	1.15 SF ON SINE WAVE				

**AC Induction Motor Performance Data**

Record # 67041

Typical performance - not guaranteed values

<b>Winding: 12WGY812-R015</b>		<b>Type: 1264M</b>		<b>Enclosure: XPFC</b>	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>		
<b>Rated Output (HP)</b>	30	<b>Full Load Torque</b>	133 LB-FT		
<b>Volts</b>	230/460	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	78/39	<b>Breakdown Torque</b>	370 LB-FT		
<b>R.P.M.</b>	1180	<b>Pull-up Torque</b>	179 LB-FT		
<b>Hz</b>	60	<b>Phase</b>	3	<b>Locked-rotor Torque</b>	217 LB-FT
<b>NEMA Design Code</b>	A	<b>KVA Code</b>	H	<b>Starting Current</b>	245 A
<b>Service Factor (S.F.)</b>	1	<b>No-load Current</b>	17.2 A		
<b>NEMA Nom. Eff.</b>	93	<b>Power Factor</b>	78	<b>Line-line Res. @ 25°C</b>	0.22799 Ω
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>	56°C	
			<b>Locked-rotor Power Factor</b>	27.6	

**Load Characteristics 460 V, 60 Hz, 30 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>
<b>Power Factor</b>	42	63	73	78	80	80
<b>Efficiency</b>	89	92.7	93.4	93.1	92.4	91.4
<b>Speed</b>	1196.5	1191.9	1188.3	1183.2	1178.2	1171.8
<b>Line amperes</b>	19.2	24.1	31	38.7	47.5	57.3


ABB Motors and Mechanical Inc.

WINDING # 12WGY812

Typical performance - not guaranteed values.

30 HP 3 PH 60 HZ 1180 RPM 460 V 1264M

TORQUES (LB-FT): PO=370 PU=179 LR=217 LRA=245

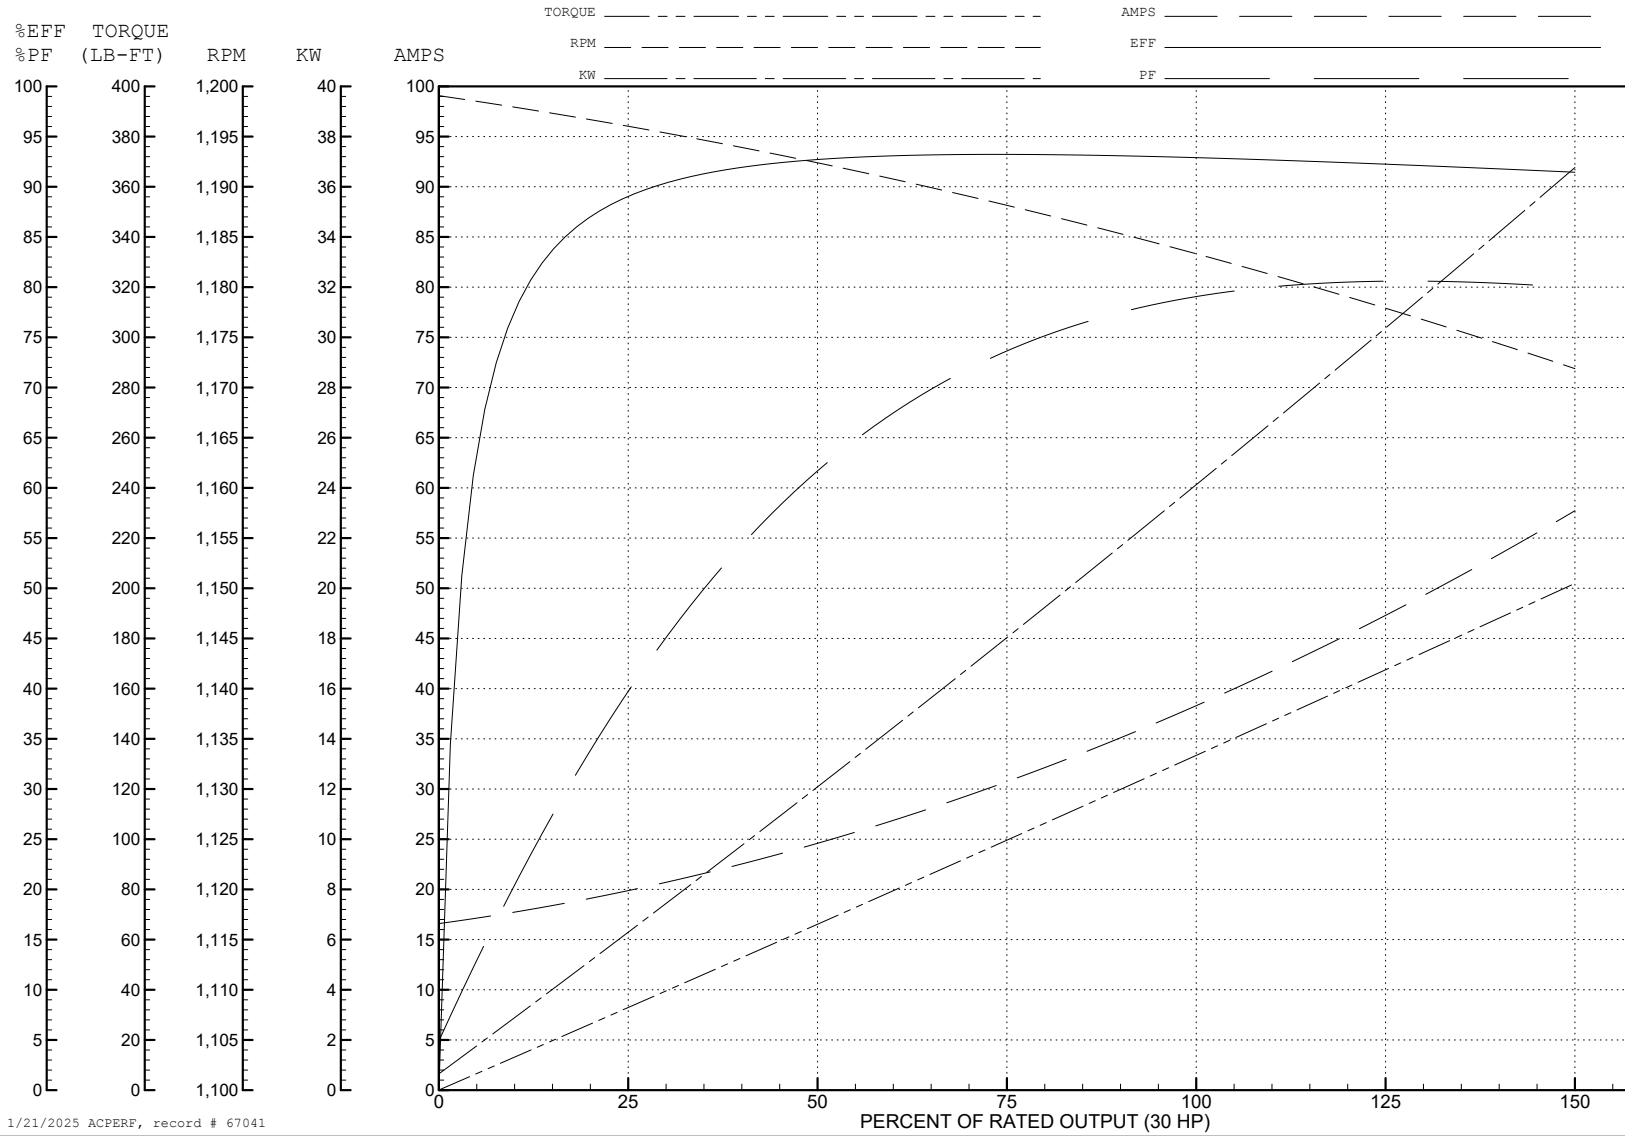

1/21/2025 ACPERF, record # 67041

**AC Induction Motor Performance Data**

Record # 75682

Typical performance - not guaranteed values

Winding: 12WGY812-R018		Type: 1264M	Enclosure: XPFC	
<b>Nameplate Data</b>			<b>380 V, 50 Hz: High Voltage Connection</b>	
Rated Output (HP)	30//25	Full Load Torque	133 LB-FT	
Volts	230/460//190/380	Start Configuration	direct on line	
Full Load Amps	78/39	Breakdown Torque	358 LB-FT	
R.P.M.	1180//980	Pull-up Torque	187 LB-FT	
Hz	60//50 Phase	Locked-rotor Torque	227 LB-FT	
NEMA Design Code	A KVA Code	Starting Current	239 A	
Service Factor (S.F.)	1	No-load Current	16.97 A	
NEMA Nom. Eff.	93 Power Factor	Line-line Res. @ 25°C	0.222 Ω	
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	56°C	
S.F. Amps		Temp. Rise @ S.F. Load	69°C	
		Locked-rotor Power Factor	30.7	
		Rotor inertia	12.2 LB-FT <sup>2</sup>	

**Load Characteristics 380 V, 50 Hz, 25 HP**

% of Rated Load	25	50	75	100	125	150
Power Factor	42	64	74	79	80	81
Efficiency	89.3	92.6	93.1	92.3	91.9	90.6
Speed	996	992	988	984	979	972
Line amperes	18.98	23.98	31.07	38.94	48.02	58.14


ABB Motors and Mechanical Inc.

WINDING # 12WGY812


25 HP 3 PH 50 HZ 984 RPM 380 V 1264M


Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=358 PU=187 LR=227 LRA=239

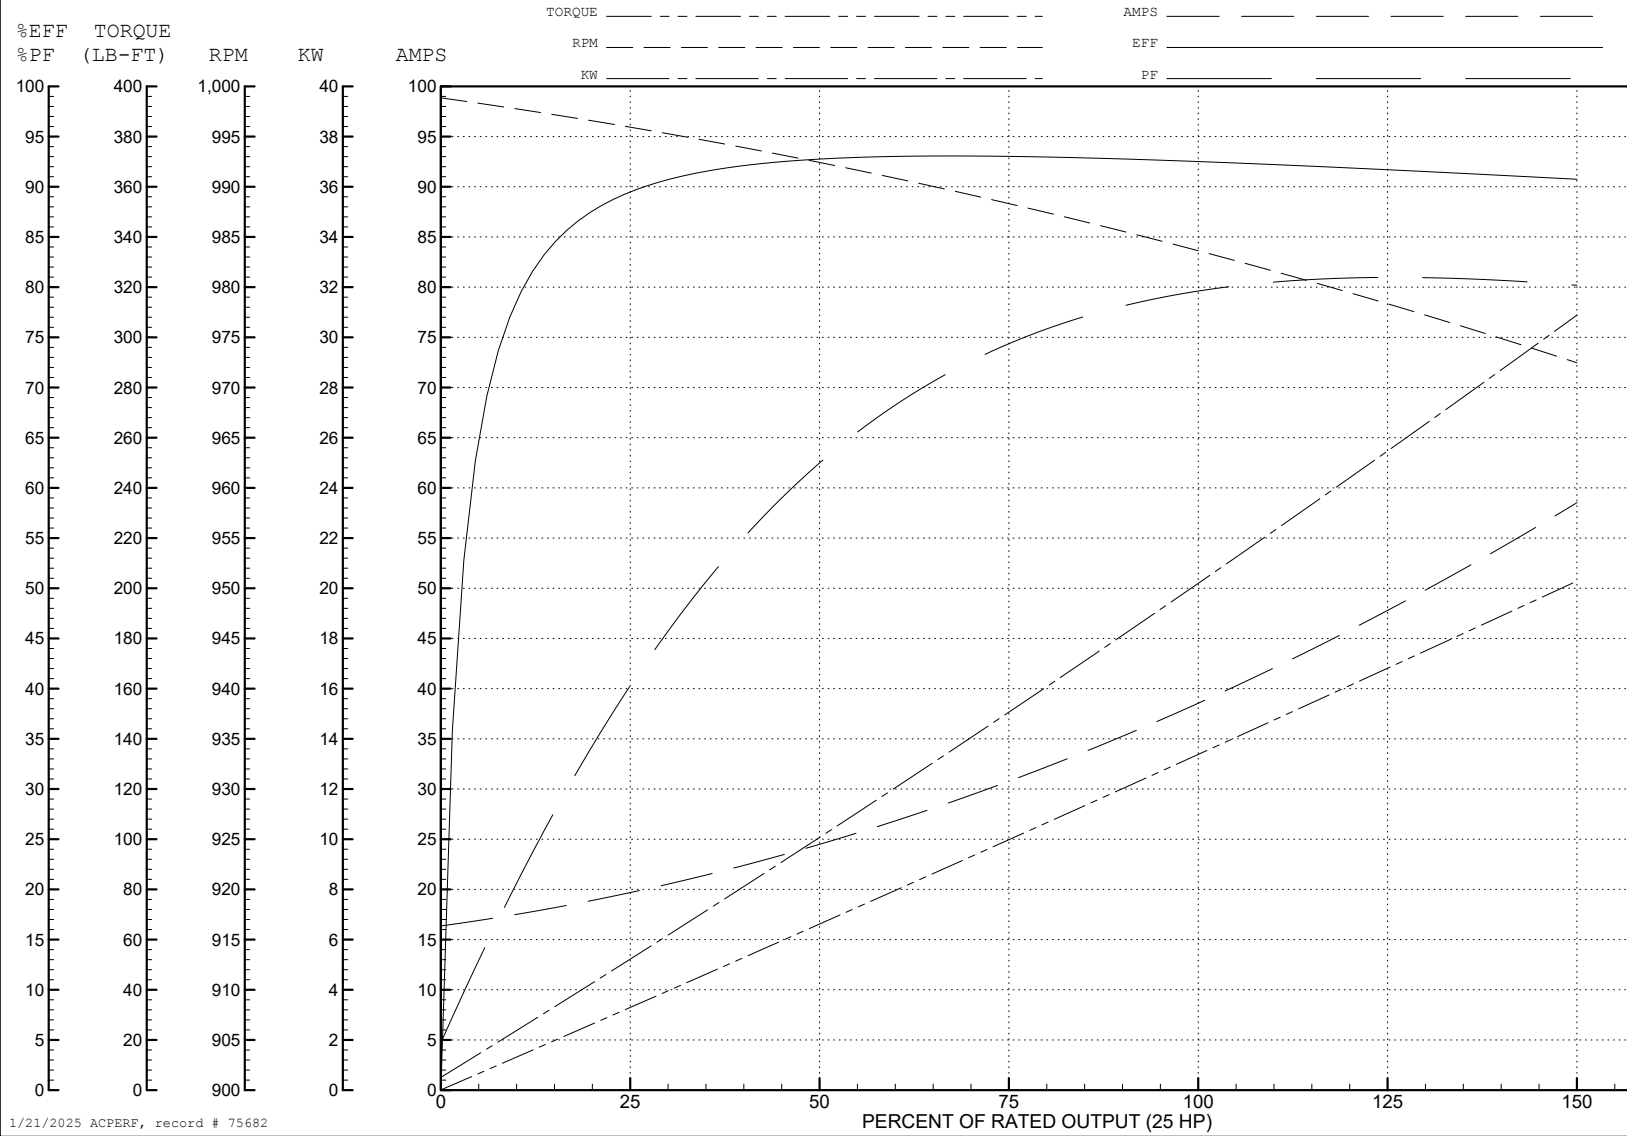


1/21/2025 ACPERF, record # 75682

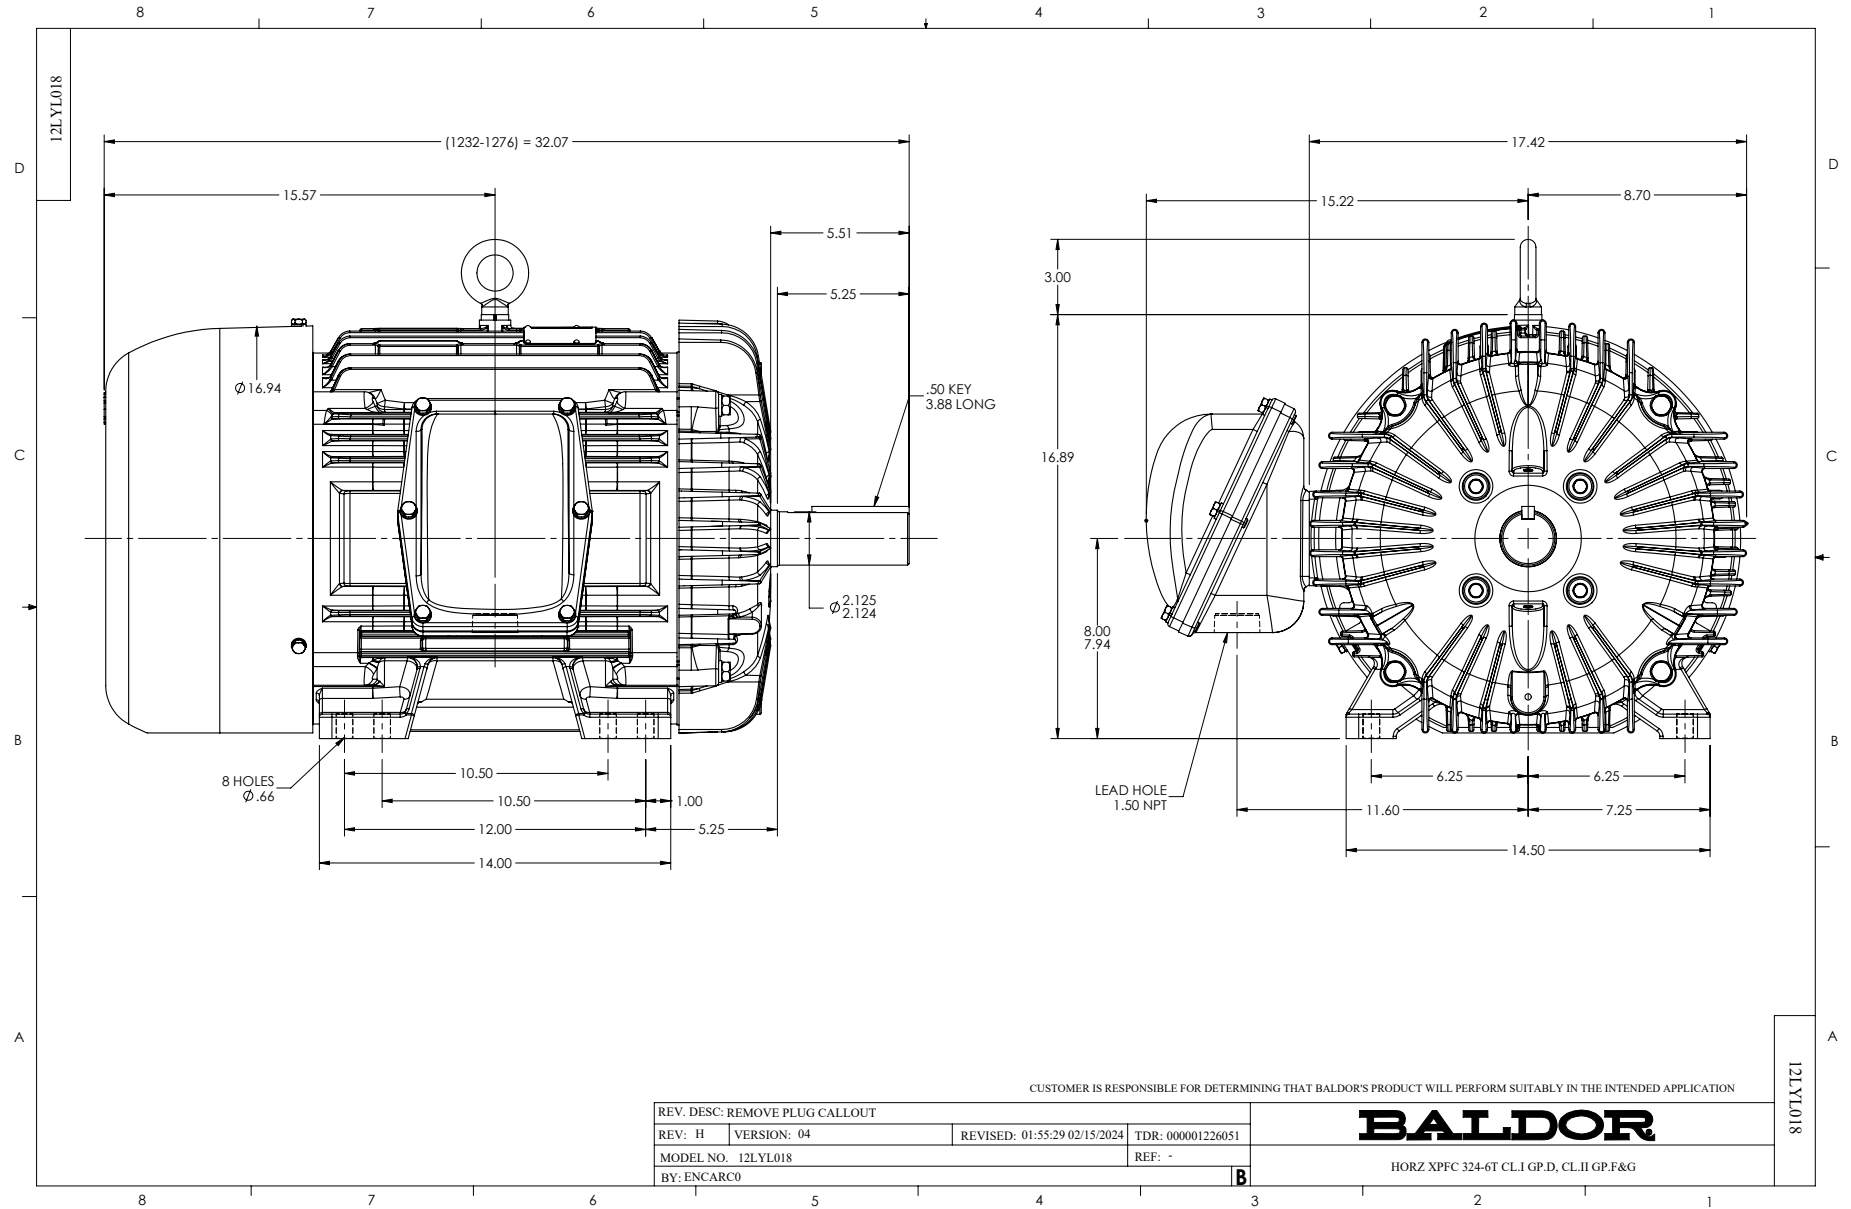


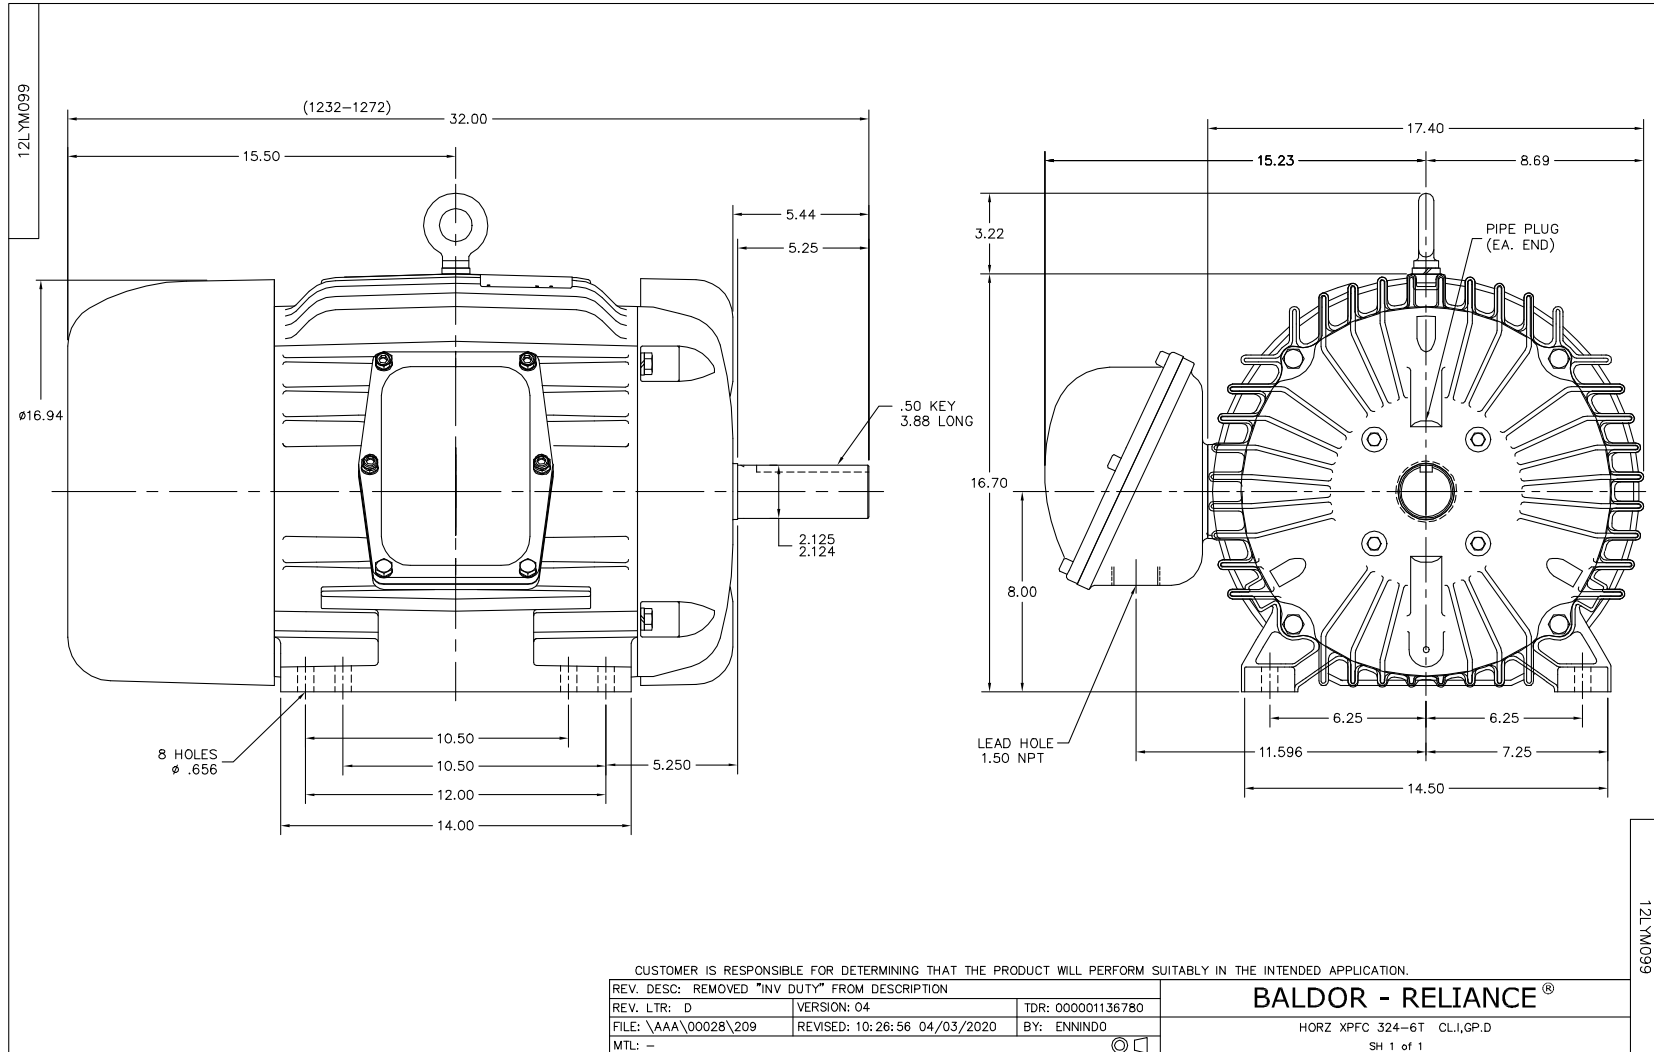

CD0005

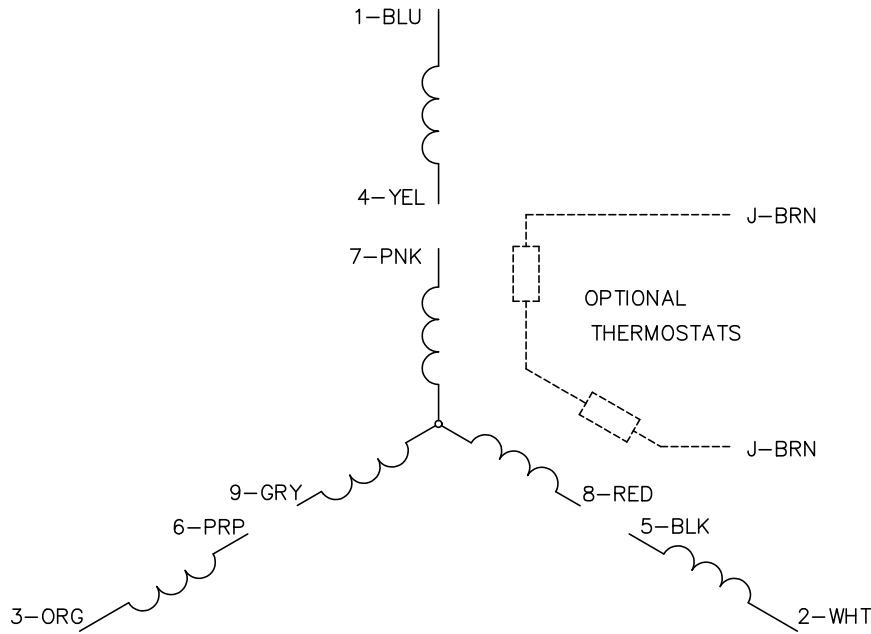


LOW VOLTAGE  
(2Y)

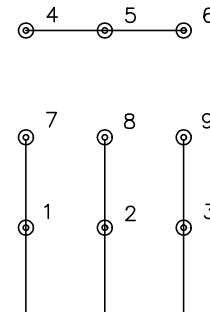

LINE

HIGH VOLTAGE  
(1Y)

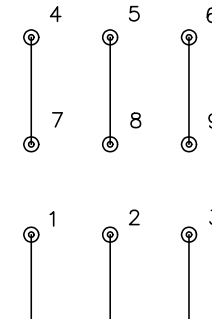

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS