


I.P.S. PIPE ACCOMMODATED			WIRE RANGE	
NOMINAL SIZE	ACTUAL OUTER DIAMETER		AWG	METRIC WIRE SIZE
	(in)	(mm)		
1/2	0.840	[21]	14 STR(.073)- 1/0 STR (.373)	2.5mm ² STR[2.1] - 50mm ² STR[9.3]
3/4	1.050	[27]		
1	1.315	[33]		

REV.	DATE	DESCRIPTION	ECO	BY	C'H'K.
A	4/3/2007 12:00:00 AM	REDRAWN TO PROE	12231	JG	BM

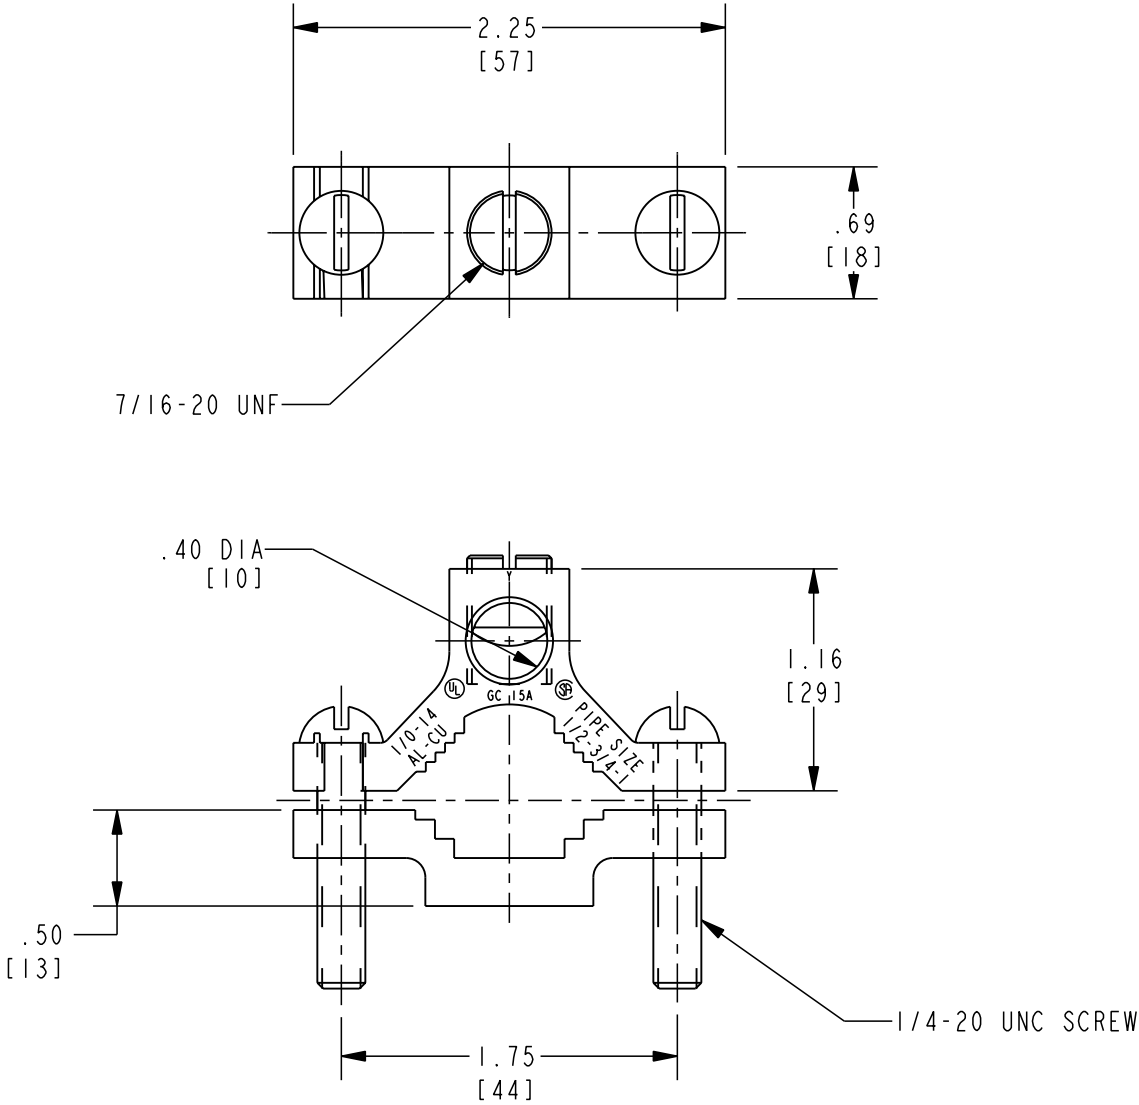

NOTES:

1. MATERIAL: ALUMINUM (1/4-20 UNC SCREWS ARE STEEL).
2. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.
3. U.L. 467 LISTED, FILE NO. E9999
4. PENETROXTM OXIDE INHIBITING JOINT COMPOUNDS ARE RECOMMENDED. FOR ALL ALUMINUM APPLICATIONS.
5. RECOMMENDED TORQUE: #2 - 1/0 WIRE - 50 LBS* IN [5.65 N*m]
: #6 - 4 WIRE - 45 LBS* IN [5.08 N*m]
: #8 WIRE - 40 LBS* IN [4.52 N*m]
: #14 - 10 WIRE - 35 LBS* IN [3.95 N*m]

TO ORDER BURNDY® PRODUCTS CALL		GROUND CLAMP	
UNITED STATES:		ITEM NO: 262002	
1-800-346-4175 (LONDONDERRY, NH)		CAT. NO: GC15A	
CANADA:		DRAWN BY: D. BOISVERT 04/08/99	
1-800-361-6975 (QUEBEC)		CHECKER: J. MICHAUD 4/19/99	
1-800-387-6487 (ALL OTHER PROVINCES)		DSN APPVL: G. DITROIA 5/25/99	
FOR PRODUCT INFO: http://www.burndy.com		MFG APPVL: N/A --	
		QA APPVL: J. BRODEUR 5/26/99	
		MKT APPVL: P. MITCHELL 5/24/99	
		SCALE: 1:1	
		DRAWING NO	
		REV	
		SIZE	
		B	
		SC212057-01	
		SHEET 1 OF 1	
		A	