

# Technical data sheet - Flexible VFD Cable XHHW-2 with UL Approval



**LUTZE DRIVEFLEX® XLPE (C)  
PVC, Shielded**

<b>Identification</b>	Type	DR XLPE (C) PVC (4GAWG14)
	Part-No.	A1061404

## Use/Application/Characteristics

Application	<ul style="list-style-type: none"> <li>Shielded motor supply cable to connect power to 3-phase motors. VFD's and Servo Drives</li> <li>Cable design for harsh industrial environments and operating conditions with high noise levels</li> <li>Thermoset XLPE offering superior overload and short-circuit temperature</li> <li>Type XHHW-2 insulation offering smaller ODs for general VFD applications</li> <li>Compliant with NFPA 79 for wiring of industrial machinery</li> <li>TC-ER-JP for use with cable trays without conduit, which can reduce installation costs in industrial environments per NEC 336.10 (7)</li> <li>WTTC - wind turbine tray cable rating for use in wind power generation</li> <li>Dry, damp or wet conditions</li> </ul>
Characteristics	<ul style="list-style-type: none"> <li>Flexible XLPE conductor design</li> <li>Reduced cable ODs</li> <li>High insulation resistance</li> <li>Low capacitance cable</li> <li>Effective dual layer shield for EMC compliance</li> <li>Specially formulated jacket for oil resistance and easy strip</li> <li>Crush impact resistant</li> <li>Gas/vapor-tight sheath per UL 1277</li> <li>Sunlight resistant</li> <li>Flame retardant</li> <li>Direct burial</li> <li>Talc and Silicone free</li> </ul>

## Construction

Description	DRIVEFLEX® XLPE (C) PVC
Number of conductors/cross-section	(4×AWG14)
Jacket material	PVC
Jacket color	black RAL 9005

26.11.2018 – Subject to technical modification

Part-No. A1061404

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2

www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

## Technical data sheet - Flexible VFD Cable XHHW-2 with UL Approval

---

Outer Ø	11.6 mm
Outer Ø	0.456 inches
Weight	154 Lbs/Mft
Cu-Index	76 Lbs/Mft

### Element 1

Element construction	41/30
Conductor	AWG conductor CU-wire tin-plated
Conductor category	fine wire
Conductor marking	black with white number print green/yellow
Conductor insulation	XLPE XHHW-2 Wet/Dry

### overall construction

Drain wire	CU-wire tin-plated
Overall shield	Foil shield Braid shield Tinned copper wires optical cover approx. 80%
Jacket characteristics	Oil resistant Silicone-free

---

### Technical data

Rated voltage $U_N$	600 V 90C UL TC-ER-JP 1000 V Flexible VFD servo cable Cable, 1000 V 105C AWM 1000 V WTTC
Temperature range fixed	-40 °C ... +105 °C
Bending radius	6 × D

### Element 1

Element construction	41/30
----------------------	-------

---

### Approvals/Standards

---

26.11.2018 – Subject to technical modification

Part-No. A1061404

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY


# Technical data sheet - Flexible VFD Cable XHHW-2 with UL Approval

Approvals	UL Flexible Motor Supply Cable Flexible VFD Servo Cable cULus TC-ER-JP UL DP-1 Meets NEC 336,392 Class I & II, Div. 2 and Class I Zone 2 per NEC 501, 502, 505 Submersible Pump (≥ AWG14) cUL TC CIC FT4 UL 1277 cURus
UL style	AWM 20886
Conformity	CE RoHS REACH
Oil resistant according to	Oil Res I Oil Res II

## General

Note CE These products are in conformity with the EU Low Voltage Directive 2014/35/EU

## Symbols

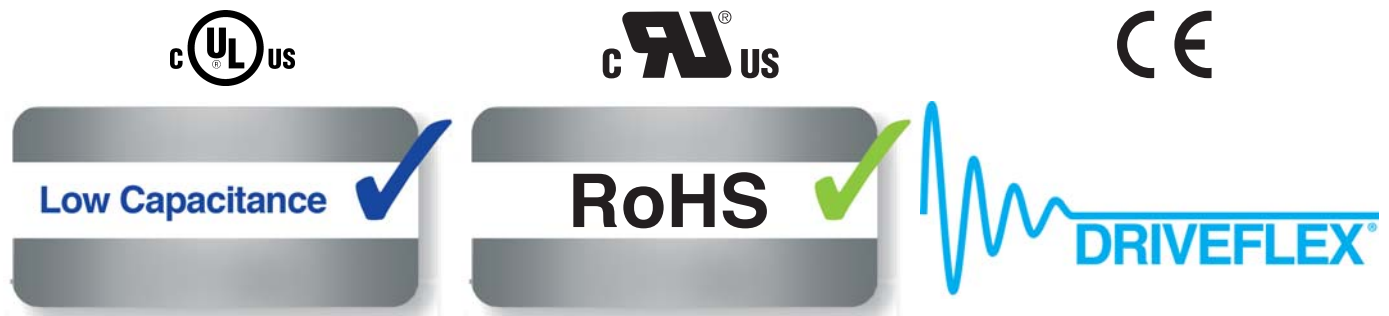

26.11.2018 – Subject to technical modification

Part-No. A1061404

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park  
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
www.lutze.com • sales.gb@lutze.co.uk