

Specification:

Emergency Operation	90 Minutes
Lamp Type	LED
Ambient Temperature	20°C to 30°C

Electrical Specifications

Model	@120VAC, 60Hz	@277VAC, 60Hz
FHEC33*R FHEC33*RRRC	44.0mA/5.0W	17.0mA/4.8W
FHEC33*G FHEC33*GRC	34.0mA/3.9W	15.0mA/3.9W
FHEC33*RSD FHEC33*GSD	27.0mA/3.0W	12.0mA/3.0W
FHEC33*RRCS FHEC33*GRCS	38.0mA/4.0W	17.0mA/4.0W


Model: FHEC33



Listings and Certification:



Mechanical Data:

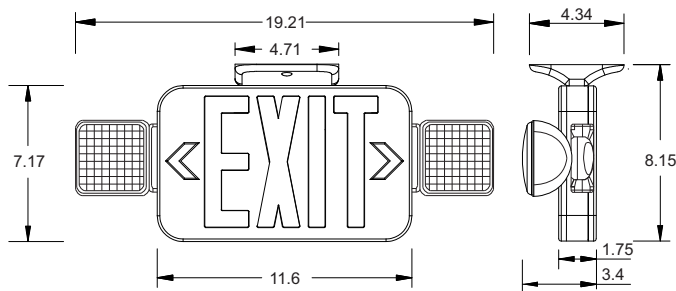

Standard Features:

- Injection-molded, high impact, UV-stabilized, UL94 V-0 thermoplastic construction in white or black finish
- Snap-fit faceplate design for installation without tools, extra faceplate included
- Removable universal chevrons for directional indications
- Top, back, J-box or end mounting through universal mounting plate and canopy
- TWO factory installed fully adjustable glare-free High Brightness LED lighting lamps
- Dual-Voltage input 120V/277V
- Maintenance-free NiCd battery
- Energy-saving LED
- Optional Self-Diagnostic version monitors battery/charger failure, battery disconnect and lamp failure
- Optional Remote-Capable version offers additional 3.44 Watts for 90 minutes

Base Model No.	Finish	Letter Color	Options
FHEC33	W = White	R = Red	SD = Self Diagnostic ¹
	B = Black	G = Green	RC = Remote Capable ¹

Build part number by adding Base Model No., one of each Case Color, and Letter Color.

Example: FHEC33-B-R-SD-RC

Remote Capable (RC) remote load rated at 3.44W
Remote Capable Self Diagnostic (RC) remote load rated at 1.72W

¹ Options may be combined

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.