



LED Tubes

Complete. Innovative. Trusted.



GE current
a Daintree company

Why switch to **LED tubes**?

LED Tubes are the fast and easy way to upgrade to LED. With Current's UL Type A, Type B and UL Type C options, you can choose the best solution for your needs.



2.3X longer life
(70K vs. 30K hrs.)



Uses 43% less energy
(18W and 2600 lumens
vs LFL 32W and 2800 lumens)



Better quality of light
(Instant-On)

Which LED tube is right for you?

Integrated LED Tube (UL Type A)


Easy Plug & Play Performance



- Uses existing ballast
- Quickest installation
- Lowest installation cost
- Limited dimming
- System compatibility depends on LFL ballast

Ballast Bypass LED Tube (UL Type B)

Simplest system direct wiring to mains



- Uses no external driver or ballast
- Eliminates compatibility issues
- Excellent efficacy and additional maintenance savings
- Highest install cost
- Requires in-line fuse & socket kit
Additional safety precaution required

Remote Driver LED Tube (UL Type C)

Best Performance



- Uses external driver, providing expanded performance capabilities
- Excellent efficacy
- Controllable dimming system
- Requires LED driver
- Medium installation cost



Complete Offering

Current offers a **broad**er and **deeper** LED Tubes assortment than leading competitors.

Innovative Designs

High-performance solutions for demanding market needs.

Trusted Experience

GE invented the first linear fluorescent in 1938, and has transferred that leadership to LED tubes.



What features does Current offer versus the leading competitors?

More

total tube options

More

glass tubes

Only Current

offers
Assembled
in USA

Highest Lumen

options in T8 & T5

No Compromise

Right brightness,
type, and material
per application

Wider Beam Angle

Distributes light better and eliminates dark spots

Special projects & Shorter lead times

Bright Light

Provides high light
output for high-bay
or demanding
applications



Statements based on product information on leading competitor public USA websites.

Current makes updating *Simpler*



Refit Solutions from Current.

It's never been easier to upgrade from linear fluorescents to Current's LED tubes. With Current's expanding offering, there are efficient solutions for many popular applications.

Integrated, ballast bypass and remote driver technology in 2, 3, 4 & 8 ft lengths and U-tubes

Shatter-resistant plastic option to prevent breakage and downtime

Glass options fully illuminate fixture with 270° light distribution



UL Type A



UL Type B



UL Type C





Linear Fluorescent lighting is the most prevalent light source among Commercial and Industrial buildings. LED Tube conversions are the perfect fit for any industry.

Healthcare



Commercial Office



Manufacturing




Government



Retail



Education

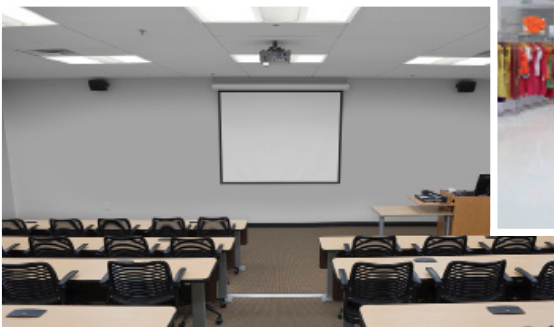

For additional information on all LED Tube offerings go to: <http://products.gecurrent.com>

LED Replacement Tubes

Integrated Plastic Tubes - Type A



Type	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (In)	Lumens Initial	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	DLC*	UL	#Location Rating	Additional Information
Integrated 4ft LED Plastic Tubes (operates on Instant Start or Program Start Ballast)																
T8	G13	18	31550	LED18ET8/4/830		25	48	2450	3000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	18	93133	LED18ET8/4/835		25	48	2550	3500K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	18	93135	LED18ET8/4/840		25	48	2550	4000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	18	93140	LED18ET8/4/850		25	48	2650	5000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	15	62399	LED15ET8/4/830		25	48	2150	3000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	15	62401	LED15ET8/4/835		25	48	2250	3500K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	15	62402	LED15ET8/4/840		25	48	2250	4000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	15	62409	LED15ET8/4/850		25	48	2350	5000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	15	62410	LED15ET8/4/865		25	48	2350	6500K	80+		70,000	-	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	12	61218	LED12ET8/4/830		25	48	1750	3000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	12	61223	LED12ET8/4/835		25	48	1800	3500K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	12	61271	LED12ET8/4/840		25	48	1800	4000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	12	61327	LED12ET8/4/850		25	48	1900	5000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	12	61329	LED12ET8/4/865		25	48	1900	6500K	80+		70,000	-	Yes	Damp	Instant or PRS Ballast, NSF Rated
Integrated 3ft LED Plastic Tubes (operates on Instant Start or Program Start Ballast)																
	G13	12	31554	LED12ET8/3/830		25	36	1500	3000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	12	26544	LED12ET8/3/835		25	36	1550	3500K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	12	26625	LED12ET8/3/840		25	36	1550	4000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	12	26627	LED12ET8/3/850		25	36	1650	5000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
Integrated 2ft LED Plastic Tubes (operates on Instant Start or Program Start Ballast)																
	G13	9	31557	LED9ET8/2/830		25	24	1350	3000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	9	26635	LED9ET8/2/835		25	24	1350	3500K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	9	26648	LED9ET8/2/840		25	24	1400	4000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
	G13	9	26676	LED9ET8/2/850		25	24	1400	5000K	80+		70,000	Yes	Yes	Damp	Instant or PRS Ballast, NSF Rated
Integrated U6 Plastic Tubes																
	G13	13	43120	LED13ET8/U6/830		12	22.5	1800	3000K	80+		50,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	13	43125	LED13ET8/U6/835		12	22.5	1850	3500K	80+		50,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	13	43129	LED13ET8/U6/840		12	22.5	1900	4000K	80+		50,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	13	43130	LED13ET8/U6/850		12	22.5	1900	5000K	80+		50,000	Yes	Yes	Damp	Instant or PRS Ballast

Integrated PET Plastic Coated Glass Tubes - Type A

Type	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (In)	Lumens Initial	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	DLC*	UL	#Location Rating	Additional Information
4ft T8 LED Tube- Plastic Coated Glass																
	G13	14	93107394	LED14ET8/G4/830CT		20	48	1950	3000K	80+		50,000	Pending	Yes	Damp	Instant or PRS Ballast
	G13	14	93107506	LED14ET8/G4/835CT		20	48	2000	3500K	80+		50,000	Pending	Yes	Damp	Instant or PRS Ballast
	G13	14	93107507	LED14ET8/G4/840CT		20	48	2000	4000K	80+		50,000	Pending	Yes	Damp	Instant or PRS Ballast
	G13	14	93107510	LED14ET8/G4/850CT		20	48	2050	5000K	80+		50,000	Pending	Yes	Damp	Instant or PRS Ballast

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

UL 1993 Environmental Requirements for LED LAMPS

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

LED Replacement Tubes Integrated Glass Tubes - Type A



Base Type	Type	Watts	Order Code	Description	Case Volts	Qty**	MOL (In)	Lumens Initial	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	DLC*	UL	#Location Rating	Additional Information
Integrated 4 ft LED Glass Tubes (operates on Instant Start or Program Start Ballast)																
T8	G13	18	35767	LED18ET8/G/4/830	20	48	2400	3000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	18	35768	LED18ET8/G/4/835	20	48	2500	3500K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	18	35769	LED18ET8/G/4/840	20	48	2500	4000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	18	35772	LED18ET8/G/4/850	20	48	2600	5000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	18	35773	LED18ET8/G/4/865	20	48	2600	6500K	80+			70,000	-	Yes	Damp	Instant or PRS Ballast
	G13	15	35790	LED15ET8/G/4/830	20	48	2100	3000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	15	35791	LED15ET8/G/4/835	20	48	2200	3500K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	15	35793	LED15ET8/G/4/840	20	48	2200	4000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	15	35797	LED15ET8/G/4/850	20	48	2300	5000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	15	35798	LED15ET8/G/4/865	20	48	2300	6500K	80+			70,000	-	Yes	Damp	Instant or PRS Ballast
	G13	13.5	21309	LED13ET8G4/830US	20	48	1900	3000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast- Assembled in USA
	G13	13.5	21344	LED13ET8G4/835US	20	48	2000	3500K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast- Assembled in USA
	G13	13.5	21373	LED13ET8G4/840US	20	48	2000	4000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast- Assembled in USA
	G13	13.5	21377	LED13ET8G4/850US	20	48	2000	5000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast- Assembled in USA
	G13	10	34277	LED10ET8/G/4/830	20	48	1550	3000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	10	34279	LED10ET8/G/4/835	20	48	1600	3500K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	10	34280	LED10ET8/G/4/840	20	48	1600	4000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	10	34282	LED10ET8/G/4/850	20	48	1650	5000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
Integrated 4 ft 50K Value LED Glass Tubes (operates on Instant Start or Program Start Ballast)																
	G13	11.5	93107390	LED11ET8/G/4/830	20	48	1600	3000K	80+			50,000	Pending	Yes	Damp	Instant or PRS Ballast
	G13	11.5	93107391	LED11ET8/G/4/835	20	48	1600	3500K	80+			50,000	Pending	Yes	Damp	Instant or PRS Ballast
	G13	11.5	93107392	LED11ET8/G/4/840	20	48	1650	4000K	80+			50,000	Pending	Yes	Damp	Instant or PRS Ballast
	G13	11.5	93107393	LED11ET8/G/4/850	20	48	1700	5000K	80+			50,000	Pending	Yes	Damp	Instant or PRS Ballast
	G13	14	34283	LED14ET8/G/4/830	20	48	1950	3000K	80+			50,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	14	34289	LED14ET8/G/4/835	20	48	2000	3500K	80+			50,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	14	34291	LED14ET8/G/4/840	20	48	2000	4000K	80+			50,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	14	34300	LED14ET8/G/4/850	20	48	2050	5000K	80+			50,000	Yes	Yes	Damp	Instant or PRS Ballast
Integrated 3 ft LED Glass Tubes (operates on Instant Start or Program Start Ballast)																
	G13	11	35783	LED11ET8/G/3/830	20	36	1450	3000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	11	35784	LED11ET8/G/3/835	20	36	1500	3500K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	11	35788	LED11ET8/G/3/840	20	36	1500	4000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	11	35789	LED11ET8/G/3/850	20	36	1600	5000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
Integrated 2 ft LED Glass Tubes (operates on Instant Start or Program Start Ballast)																
	G13	8	35775	LED8ET8/G/2/830	20	24	1300	3000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	8	35776	LED8ET8/G/2/835	20	24	1350	3500K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	8	35778	LED8ET8/G/2/840	20	24	1350	4000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	8	35779	LED8ET8/G/2/850	20	24	1400	5000K	80+			70,000	Yes	Yes	Damp	Instant or PRS Ballast

Integrated Glass Tubes with reveal® TriGain™ Technology - Type A

Base Type	Type	Watts	Order Code	Description	Case Volts	Qty**	MOL (In)	Lumens Initial	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	DLC*	UL	#Location Rating	Additional Information
Integrated 4 ft High CRI with reveal® TriGain™ Technology LED Glass Tubes (operates on Instant Start or Program Start Ballast)																
	G13	15	34307	LED15ET8/G/4/935	20	48	2150	3500K	90			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	15	34313	LED15ET8/G/4/940	20	48	2200	4000K	90			70,000	Yes	Yes	Damp	Instant or PRS Ballast
	G13	15	34316	LED15ET8/G/4/950	20	48	2250	5000K	90			70,000	Yes	Yes	Damp	Instant or PRS Ballast
Integrated 3 ft High CRI with reveal® TriGain™ Technology LED Glass Tubes (operates on Instant Start or Program Start Ballast)																
	G13	11	34323	LED11ET8/G/3/935	20	36	1500	3500K	90			70,000	-	Yes	Damp	Instant or PRS Ballast
	G13	11	34326	LED11ET8/G/3/940	20	36	1500	4000K	90			70,000	-	Yes	Damp	Instant or PRS Ballast
	G13	11	34332	LED11ET8/G/3/950	20	36	1600	5000K	90			70,000	-	Yes	Damp	Instant or PRS Ballast
Integrated 2 ft High CRI with reveal® TriGain™ Technology LED Glass Tubes (operates on Instant Start or Program Start Ballast)																
	G13	9	34337	LED9ET8/G/2/935	20	24	1300	3500K	90			70,000	-	Yes	Damp	Instant or PRS Ballast
	G13	9	34341	LED9ET8/G/2/940	20	24	1300	4000K	90			70,000	-	Yes	Damp	Instant or PRS Ballast
	G13	9	34342	LED9ET8/G/2/950	20	24	1400	5000K	90			70,000	-	Yes	Damp	Instant or PRS Ballast

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

UL 1993 Environmental Requirements for LED LAMPs

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

LED Replacement Tubes

Integrated Glass Tubes - Type A



Type	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (In)	Lumens Initial	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	DLC*	UL	#Location Rating	Additional Information
Integrated 4 ft LED Glass T5 HO Tubes (operates on Instant Start or Program Start Ballast)																
T5	G5	25.5	19203	LED26ET5/G/4/830	20	46	3650	3000K	80+			50,000	Yes	Yes	Damp	Requires T5 HO Ballast
	G5	25.5	19221	LED26ET5/G/4/835	20	46	3750	3500K	80+			50,000	Yes	Yes	Damp	Requires T5 HO Ballast
	G5	25.5	19227	LED26ET5/G/4/840	20	46	3800	4000K	80+			50,000	Yes	Yes	Damp	Requires T5 HO Ballast
	G5	25.5	19348	LED26ET5/G/4/850	20	46	3900	5000K	80+			50,000	Yes	Yes	Damp	Requires T5 HO Ballast
	G5	25.5	19488	LED26ET5/G/4/865	20	46	3800	6500K	80+			50,000	-	Yes	Damp	Requires T5 HO Ballast
Integrated 2 ft LED Glass T5 HO Tubes (operates on Instant Start or Program Start Ballast)																
	G5	11	34413	LED11ET5/G/2/830	20	22	1500	3000K	80+			50,000	-	Yes	Damp	Requires T5 HO Ballast
	G5	11	34417	LED11ET5/G/2/835	20	22	1550	3500K	80+			50,000	-	Yes	Damp	Requires T5 HO Ballast
	G5	11	34418	LED11ET5/G/2/840	20	22	1600	4000K	80+			50,000	-	Yes	Damp	Requires T5 HO Ballast
	G5	11	34424	LED11ET5/G/2/850	20	22	1600	5000K	80+			50,000	-	Yes	Damp	Requires T5 HO Ballast
Integrated 4 ft LED Glass T5 HE Tubes (operates on Instant Start or Program Start Ballast)																
	G5	13	34351	LED13ET5G4/830HE	20	46	1900	3000K	80+			50,000	Yes	Yes	Damp	Requires T5 HE Ballast
	G5	13	34354	LED13ET5G4/835HE	20	46	1950	3500K	80+			50,000	Yes	Yes	Damp	Requires T5 HE Ballast
	G5	13	34355	LED13ET5G4/840HE	20	46	2000	4000K	80+			50,000	Yes	Yes	Damp	Requires T5 HE Ballast
	G5	13	34367	LED13ET5G4/850HE	20	46	2000	5000K	80+			50,000	Yes	Yes	Damp	Requires T5 HE Ballast
Integrated 3 ft LED Glass T5 HE Tubes (operates on Instant Start or Program Start Ballast)																
	G5	10	34371	LED10ET5G3/830HE	20	34	1500	3000K	80+			50,000	-	Yes	Damp	Requires T5 HE Ballast
	G5	10	34376	LED10ET5G3/835HE	20	34	1550	3500K	80+			50,000	-	Yes	Damp	Requires T5 HE Ballast
	G5	10	34401	LED10ET5G3/840HE	20	34	1600	4000K	80+			50,000	-	Yes	Damp	Requires T5 HE Ballast
	G5	10	34402	LED10ET5G3/850HE	20	34	1600	5000K	80+			50,000	-	Yes	Damp	Requires T5 HE Ballast
Integrated 2 ft LED Glass T5 HE Tubes (operates on Instant Start or Program Start Ballast)																
	G5	7	34403	LED7ET5/G2/830HE	20	22	1000	3000K	80+			50,000	-	Yes	Damp	Requires T5 HE Ballast
	G5	7	34404	LED7ET5/G2/835HE	20	22	1100	3500K	80+			50,000	-	Yes	Damp	Requires T5 HE Ballast
	G5	7	34411	LED7ET5/G2/840HE	20	22	1150	4000K	80+			50,000	-	Yes	Damp	Requires T5 HE Ballast
	G5	7	34412	LED7ET5/G2/850HE	20	22	1150	5000K	80+			50,000	-	Yes	Damp	Requires T5 HE Ballast

Ballast Bypass Glass Tubes - Double Ended - Type B

Type	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (In)	Lumens Initial	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	DLC*	UL	#Location Rating	Additional Information
Ballast Bypass- 4 ft LED Glass Tubes																
T8	G13	14	39493	LED14BDT8/G4/830	20	48	1700	3000K	80			50,000	Yes	Yes	Damp	Double Ended Power
	G13	14	39494	LED14BDT8/G4/835	20	48	1750	3500K	80			50,000	Yes	Yes	Damp	Double Ended Power
	G13	14	39498	LED14BDT8/G4/840	20	48	1800	4000K	80			50,000	Yes	Yes	Damp	Double Ended Power
	G13	14	39519	LED14BDT8/G4/850	20	48	1850	5000K	80			50,000	Yes	Yes	Damp	Double Ended Power
Ballast Bypass- 3ft LED Glass Tubes																
T8	G13	12	39525	LED12BDT8/G3/830	20	36	1450	3000	80			50,000	Yes	Yes	Damp	Double Ended Power
	G13	12	39547	LED12BDT8/G3/835	20	36	1500	3500	80			50,000	Yes	Yes	Damp	Double Ended Power
	G13	12	39554	LED12BDT8/G3/840	20	36	1550	4000	80			50,000	Yes	Yes	Damp	Double Ended Power
	G13	12	39557	LED12BDT8/G3/850	20	36	1550	5000	80			50,000	Yes	Yes	Damp	Double Ended Power
Ballast Bypass- 2 ft LED Glass Tubes																
T8	G13	9	39558	LED9BDT8/G2/830	20	24	1100	3000	80			50,000	Yes	Yes	Damp	Double Ended Power
	G13	9	39560	LED9BDT8/G2/835	20	24	1150	3500	80			50,000	Yes	Yes	Damp	Double Ended Power
	G13	9	39561	LED9BDT8/G2/840	20	24	1200	4000	80			50,000	Yes	Yes	Damp	Double Ended Power
	G13	9	39563	LED9BDT8/G2/850	20	24	1200	5000	80			50,000	Yes	Yes	Damp	Double Ended Power

In-Line Fuse - Type B

Order Code	Description	Kit Contents
39017	BT8-1AFUSEKIT	1 Fuse (1A), 1 Fuse Holder

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

UL 1993 Environmental Requirements for LED LAMPS

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

LED Replacement Tubes

Ballast Bypass Glass Tubes - Single Ended - Type B



Type	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (In)	Lumens Initial	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	DLC*	UL	#Location Rating	Additional Information
Ballast Bypass- 4 ft LED Glass Tubes																
T8	G13	15	34435	LED15BT8/G4/830	120-277	20	48	2000	3000K	80+		50,000	Yes	Yes	Damp	Non-Shunted Sockets Required
	G13	15	31919	LED15BT8/G4/835	120-277	20	48	2050	3500K	80+		50,000	Yes	Yes	Damp	Non-Shunted Sockets Required
Ballast Bypass- 3 ft LED Glass Tubes																
	G13	13	34472	LED13BT8/G3/830	120-277	20	36	1700	3000K	80+		50,000	-	Yes	Damp	Non-Shunted Sockets Required
	G13	13	34474	LED13BT8/G3/835	120-277	20	36	1800	3500K	80+		50,000	-	Yes	Damp	Non-Shunted Sockets Required
	G13	13	34477	LED13BT8/G3/840	120-277	20	36	1850	4000K	80+		50,000	-	Yes	Damp	Non-Shunted Sockets Required
	G13	13	34478	LED13BT8/G3/850	120-277	20	36	1900	5000K	80+		50,000	-	Yes	Damp	Non-Shunted Sockets Required
Ballast Bypass- 2 ft LED Glass Tubes																
	G13	8	34468	LED8BT8/G2/830	120-277	20	24	950	3000K	80+		50,000	Yes	Yes	Damp	Non-Shunted Sockets Required
	G13	8	32125	LED8BT8/G2/835	120-277	20	24	1000	3500K	80+		50,000	Yes	Yes	Damp	Non-Shunted Sockets Required
Ballast Bypass Type B LED U6-Tubes																
	2G13	13	34480	LED13BT8/U6/830	120-277	12	36	1800	3000K	80+		50,000	Yes	Yes	Damp	Non-Shunted Sockets Required
	2G13	13	34481	LED13BT8/U6/835	120-277	12	36	1850	3500K	80+		50,000	Yes	Yes	Damp	Non-Shunted Sockets Required
	2G13	13	34482	LED13BT8/U6/840	120-277	12	36	1900	4000K	80+		50,000	Yes	Yes	Damp	Non-Shunted Sockets Required
	2G13	13	34484	LED13BT8/U6/850	120-277	12	36	1900	5000K	80+		50,000	Yes	Yes	Damp	Non-Shunted Sockets Required
Ballast Bypass Type B LED U1-5/8-Tubes																
	2G13	13	34487	LED13BT8/U/830	120-277	15	22.5	1750	3000K	80+		50,000	Yes	Yes	Damp	Non-Shunted Sockets Required
	2G13	13	34489	LED13BT8/U/835	120-277	15	22.5	1800	3500K	80+		50,000	Yes	Yes	Damp	Non-Shunted Sockets Required
	2G13	13	34499	LED13BT8/U/840	120-277	15	22.5	1850	4000K	80+		50,000	Yes	Yes	Damp	Non-Shunted Sockets Required

Remote Plastic Tubes - Type C

Type	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (In)	Lumens Initial	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	DLC*	UL	#Location Rating	Additional Information
Remote Plastic 4 ft LED Tubes (Operates on Remote Driver)																
T8	G13	18	94382	LED21T8/4/840		10	48	2750	4000K	80+		70,000	Yes	Yes	Damp	Requires Driver, NSF Rated
	G13	13	38954	LED15T8/4/830		10	48	1950	3000K	80+		70,000	Yes	Yes	Damp	Requires Driver, NSF Rated
	G13	13	38962	LED15T8/4/850		10	48	2100	5000K	80+		70,000	Yes	Yes	Damp	Requires Driver, NSF Rated
Remote Plastic 3 ft LED Tubes (Operates on Remote Driver)																
	G13	16	82343	LED18T8/3/835		10	36	1800	3500K	80+		70,000	-	Yes	Damp	Requires Driver, NSF Rated
	G13	16	82345	LED18T8/3/840		10	36	1800	4000K	80+		70,000	-	Yes	Damp	Requires Driver, NSF Rated
	G13	16	82346	LED18T8/3/850		10	36	1800	5000K	80+		70,000	-	Yes	Damp	Requires Driver, NSF Rated
	G13	13	99692	LED15T8/3/830		20	36	1850	3000K	80+		70,000	-	Yes	Damp	Requires Driver, NSF Rated
	G13	13	99693	LED15T8/3/835		20	36	1900	3500K	80+		70,000	-	Yes	Damp	Requires Driver, NSF Rated
	G13	13	99694	LED15T8/3/840		20	36	1950	4000K	80+		70,000	-	Yes	Damp	Requires Driver, NSF Rated
	G13	13	99695	LED15T8/3/850		20	36	1950	5000K	80+		70,000	-	Yes	Damp	Requires Driver, NSF Rated
Remote Plastic 2 ft LED Tubes (Operates on Remote Driver)																
	G13	8	65706	LED9T8/2/835		20	24	1100	3500K	80+		70,000	Yes	Yes	Damp	Requires Driver, NSF Rated
	G13	8	65707	LED9T8/2/840		20	24	1150	4000K	80+		70,000	Yes	Yes	Damp	Requires Driver, NSF Rated
	G13	8	65711	LED9T8/2/850		20	24	1150	5000K	80+		70,000	Yes	Yes	Damp	Requires Driver, NSF Rated
	G13	8	92997	LED9T8/2/865		20	24	1000	5000K	80+		70,000	-	Yes	Damp	Requires Driver, NSF Rated
Remote Plastic LED U Tubes (Operates on Remote Driver)																
	G13	12	28084	LED14T8/U/835		15	22.5	1700	3500K	80+		50,000	Yes	Yes	Damp	Requires Driver
	G13	12	28164	LED14T8/U/840		15	22.5	1700	4000K	80+		50,000	Yes	Yes	Damp	Requires Driver

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

LED Replacement Tubes

Remote Glass Tubes - Type C



Type	Base Type	Watts	Order Code	Description	Case Qty**	MOL (In)	Lumens Initial	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	DLC*	UL	#Location Rating	Additional Information
Remote 4ft LED Glass Tubes (Operates on Remote Driver)															See LumenChoice™ Section for Replacements
T8	G13	18	62485	LED21T8/G/4/840	10	48	2700	4000K	80+		70,000	Yes	Yes	Damp	Requires Driver
	G13	18	62406	LED21T8/G/4/835HL	10	48	3100	3500K	80+		70,000	Yes	Yes	Damp	Requires Driver
	G13	18	62407	LED21T8/G/4/840HL	10	48	3200	4000K	80+		70,000	Yes	Yes	Damp	Requires Driver
	G13	18	62408	LED21T8/G/4/850HL	10	48	3200	5000K	80+		70,000	Yes	Yes	Damp	Requires Driver
	G13	18	91475	LED21T8/G/4/830US	20	48	2600	3000K	80+		70,000	Yes	Yes	Damp	Requires Driver - Assembled in USA
	G13	18	91496	LED21T8/G/4/835US	20	48	2600	3500K	80+		70,000	Yes	Yes	Damp	Requires Driver - Assembled in USA
	G13	18	91497	LED21T8/G/4/840US	20	48	2600	4000K	80+		70,000	Yes	Yes	Damp	Requires Driver - Assembled in USA
	G13	18	91498	LED21T8/G/4/850US	20	48	2600	5000K	80+		70,000	Yes	Yes	Damp	Requires Driver - Assembled in USA
	G13	13	99696	LED15T8/G/4/830US	20	48	1950	3000K	80+		70,000	Yes	Yes	Damp	Requires Driver - Assembled in USA
	G13	13	99697	LED15T8/G/4/835US	20	48	2050	3500K	80+		70,000	Yes	Yes	Damp	Requires Driver - Assembled in USA
	G13	13	38944	LED15T8/G/4/830	10	48	1850	3000K	80+		70,000	Yes	Yes	Damp	Requires Driver
	G13	13	38950	LED15T8/G/4/840	10	48	1950	4000K	80+		70,000	Yes	Yes	Damp	Requires Driver
	G13	13	38952	LED15T8/G/4/865	10	48	1950	6500K	80+		70,000	-	Yes	Damp	Requires Driver
	G13	10	76264	LED12T8/G/4/835	10	48	1600	3500K	80+		70,000	Yes	Yes	Damp	Requires Driver
	G13	10	76265	LED12T8/G/4/840	10	48	1650	4000K	80+		70,000	Yes	Yes	Damp	Requires Driver
	G13	10	76271	LED12T8/G/4/850	10	48	1650	5000K	80+		70,000	Yes	Yes	Damp	Requires Driver
Remote 3ft LED Glass Tubes (Operates on Remote Driver)															See LumenChoice™ Section for Replacements
	G13	13	99687	LED15T8/G/3/830	20	36	1800	3000K	80+		70,000	-	Yes	Damp	Requires Driver
	G13	13	99688	LED15T8/G/3/835	20	36	1850	3500K	80+		70,000	-	Yes	Damp	Requires Driver
	G13	13	99689	LED15T8/G/3/840	20	36	1900	4000K	80+		70,000	-	Yes	Damp	Requires Driver
	G13	13	99691	LED15T8/G/3/850	20	36	1900	5000K	80+		70,000	-	Yes	Damp	Requires Driver
	G13	16	38258	LED18T8/G/3/835	20	36	1800	3500K	80+		70,000	-	Yes	Damp	Requires Driver
	G13	16	38260	LED18T8/G/3/840	20	36	1900	4000K	80+		70,000	-	Yes	Damp	Requires Driver
	G13	16	38261	LED18T8/G/3/850	20	36	1900	5000K	80+		70,000	-	Yes	Damp	Requires Driver
Remote 2ft LED Glass Tubes (Operates on Remote Driver)															See LumenChoice™ Section for Replacements
	G13	8	38933	LED9T8/G/2/830	20	24	1000	3000K	80+		70,000	Yes	Yes	Damp	Requires Driver
	G13	8	38935	LED9T8/G/2/835	20	24	1000	3500K	80+		70,000	Yes	Yes	Damp	Requires Driver
	G13	8	38939	LED9T8/G/2/850	20	24	1100	5000K	80+		70,000	Yes	Yes	Damp	Requires Driver
Remote 8ft LED Glass Tubes (Operates on Remote Driver)															See LumenChoice™ Section for Replacements
	Fa8	30	62326	LED36T8/G/8/830	20	96	4200	3000K	80+		50,000	Yes	Yes	Damp	Requires Driver - Assembled in USA
	Fa8	30	62327	LED36T8/G/8/835	20	96	4400	3500K	80+		50,000	Yes	Yes	Damp	Requires Driver - Assembled in USA
	Fa8	30	62329	LED36T8/G/8/840	20	96	4400	4000K	80+		50,000	Yes	Yes	Damp	Requires Driver - Assembled in USA
	Fa8	30	62349	LED36T8/G/8/850	20	96	4400	5000K	80+		50,000	Yes	Yes	Damp	Requires Driver - Assembled in USA
Remote Glass U6 Tubes (Operates on Remote Driver)															
	G13	13	43131	LED15T8/G/U6/830	12	22.5	1700	3000K	80+		50,000	Yes	Yes	Damp	Requires Driver
	G13	13	43135	LED15T8/G/U6/835	12	22.5	1800	3500K	80+		50,000	Yes	Yes	Damp	Requires Driver
	G13	13	43143	LED15T8/G/U6/840	12	22.5	1800	4000K	80+		50,000	Yes	Yes	Damp	Requires Driver
	G13	13	43145	LED15T8/G/U6/850	12	22.5	1800	5000K	80+		50,000	Yes	Yes	Damp	Requires Driver

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

UL 1993 Environmental Requirements for LED LAMPS

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

LED Replacement Tubes

Remote Glass Tubes - Type C



Type	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (In)	Lumens Initial	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	DLC*	UL	#Location Rating	Additional Information
Remote 4ft LED Glass T5 HO Tubes (Operates on Remote Driver)																
T5	G5	31	91973	LED36T5/G/4/830	20	46	4300	3000K	80+			50,000	Yes	Yes	Damp	Requires Driver
	G5	31	91976	LED36T5/G/4/835	20	46	4400	3500K	80+			50,000	Yes	Yes	Damp	Requires Driver
	G5	31	91977	LED36T5/G/4/840	20	46	4400	4000K	80+			50,000	Yes	Yes	Damp	Requires Driver
	G5	31	91997	LED36T5/G/4/850	20	46	4700	5000K	80+			50,000	Yes	Yes	Damp	Requires Driver
	G5	31	92006	LED36T5/G/4/865	20	46	4700	6500K	80+			50,000	-	Yes	Damp	Requires Driver
Remote 2ft LED Glass T5 HO Tubes (Operates on Remote Driver)																
	G5	13	76150	LED15T5/G/2/830	20	22	1800	3000K	80+			50,000	-	Yes	Damp	Requires Driver
	G5	13	76164	LED15T5/G/2/835	20	22	1850	3500K	80+			50,000	-	Yes	Damp	Requires Driver
	G5	13	76129	LED15T5/G/2/840	20	22	1900	4000K	80+			50,000	-	Yes	Damp	Requires Driver
	G5	13	76167	LED15T5/G/2/850	20	22	1900	5000K	80+			50,000	-	Yes	Damp	Requires Driver
	G5	13	76192	LED15T5/G/2/865	20	22	1900	6500K	80+			50,000	-	Yes	Damp	Requires Driver
Remote 4ft LED Glass T5 HE Tubes (Operates on Remote Driver)																
	G5	13	34176	LED15T5/G4/830HE	20	46	1900	3000K	80+			50,000	Yes	Yes	Damp	Requires Driver
	G5	13	34182	LED15T5/G4/835HE	20	46	1950	3500K	80+			50,000	Yes	Yes	Damp	Requires Driver
	G5	13	34192	LED15T5/G4/840HE	20	46	2000	4000K	80+			50,000	Yes	Yes	Damp	Requires Driver
	G5	13	34194	LED15T5/G4/850HE	20	46	2000	5000K	80+			50,000	Yes	Yes	Damp	Requires Driver
Remote 2ft LED Glass T5 HE Tubes (Operates on Remote Driver)																
	G5	8	34196	LED9T5/G2/830HE	20	22	1100	3000K	80+			50,000	-	Yes	Damp	Requires Driver
	G5	8	34197	LED9T5/G2/835HE	20	22	1150	3500K	80+			50,000	-	Yes	Damp	Requires Driver
	G5	8	34204	LED9T5/G2/840HE	20	22	1200	4000K	80+			50,000	-	Yes	Damp	Requires Driver
	G5	8	34205	LED9T5/G2/850HE	20	22	1200	5000K	80+			50,000	-	Yes	Damp	Requires Driver

LED Replacement Tubes

Regular Remote Drivers



Type	Base Type	Watts	Order Code	Description	Volts	Case Qty**	Output Current (A)	Frequency	Eff	Output	Output Voltage	Temp (Min)	Temp (Max)	Dimmable	Additional Information
Lightech Drivers - Non-Dimming															
	18	93100	LED9T8/DR/UN/2L	120-277V	10	0.27x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	-	-	Maximum 2 Tubes (non potted)
	24	76289	LED12T8/DR/2L	120-277V	10	0.21x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	-	-	Maximum 2 Tubes
	30	38970	LED15T8/DR/UN/2L	120-277V	10	0.44x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	-	-	Maximum 2 Tubes (non potted)
	36	82347	LED18T8/DR/UN/2L	120-277V	10	0.53x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	-	-	Maximum 2 Tubes (non potted)
	21	94384	LED21T8/DR/1L	120-277V	10	0.62	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	-	-	Maximum 1 Tube
	42	94385	LED21T8/DR/2L	120-277V	10	0.62x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	-	-	Maximum 2 Tubes
Lightech Drivers - Dimming															
	24	76290	LED12T8/DR/D2L	120-277V	10	0.21x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Yes	Maximum 2 Tubes
	48	76318	LED12T8/DR/D4L	120-277V	10	0.21x4	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Yes	Maximum 4 Tubes
	42	28174	LED14/DR/D3L	120-277V	10	0.43x3	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Yes	Maximum 3 Tubes
	30	38974	LED15T8/DR/D2L	120-277V	10	0.44x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Yes	Maximum 2 Tubes
	60	38975	LED15T8/DR/D4L	120-277V	10	0.44x4	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Yes	Maximum 4 Tubes
	36	88141	LED18T8/DR/D2L	120-277V	10	0.53x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Yes	Maximum 2 Tubes
	72	88139	LED18T8/DR/D4L	120-277V	10	0.53x4	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Yes	Maximum 4 Tubes
	42	60041	LED21T8/DR/D2L	120-277V	10	0.62x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Yes	Maximum 2 Tubes
	84	62030	LED21T8/DR/D4L	120-277V	10	0.62x4	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Yes	Maximum 4 Tubes
	72	63126	LED36T8/DR/D2L	120-277V	10	1.06x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Yes	Maximum 2 Tubes
	144	92013	LED36T8/DR/D4L	120-277V	10	1.06x4	50/60 Hz	>.9	DC	26-34V	-4 F	113F	Yes	Yes	Maximum 4 Tube

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

UL 1993 Environmental Requirements for LED LAMPS

Location, damp - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry - Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet - Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

LumenChoice™ Type C LED Tube and Driver System



Convert your existing linear fluorescent fixture to LED lighting without needing a comprehensive reinstall. LED tubes are ideal for those seeking high energy savings with minimal installation time.

LumenChoice™ Type C system utilizes one LED tube to create multiple lumen options via the wattage of the selected LED driver. See reverse for LED tubes and driver product details.

Current offers two driver platforms:

- 1) **Regular Drivers**-choose the desired fixed-wattage option based on the desired lumen output, i.e. 12W, 15W, 21W. Available in Dimming and Non-Dimming.
- 2) **LumenChoice™ Drivers**-adjust the wattage/lumen level on the driver, in the field i.e. toggle from 9W, 12W, 16W. This option simplifies bill of materials and inventory even further, and allows for making on-the-fly wattage/lumen adjustments at the point of installation. Low Watt drivers (LW) and High watt drivers (HW) come pre-set at 15W and 21W respectively and can easily be adjusted pre or post installation. All LumenChoice Drivers are dimming also, allowing for even more control over lumen output and efficiency.

FEATURES

- T8 & T5 Configurations
- 2', 3' & 4' Tubes
- Available in plastic & glass
- Assembled in USA options
- 1050 – 3000 lumens
- > 120 total system lumens per watt (LPW)
- 3000K, 3500K, 4000K, 5000K and 6500K color temperatures
- T8 70,000 hr life rating & 7 year warranty
- T5 50,000 hr life rating & 5 year warranty
- UL and cUL
- Open or enclosed fixtures
- Damp rating
- Dimmable (with dimming driver)

PERFORMANCE BENEFITS

- Fast and Easy LED upgrade
- Low energy LFL replacement
- 2.3X Longer Life vs LFL (70,000 vs. 30,000 hours)
- Better quality of light –instant on
- Plastic-NSF rated, shatter resistant, prevents breakage and downtime
- Glass-270° light distribution
- Easy disposal, non-hazardous waste

General Lamp Product Information and Performance Data

General information						
Lamp Type	Base Type	CRI	Case Pack	Rated life (L70)	UL	Location Rating
T8	G13	80+	20	70,000	Yes	Damp
T5	G5	80+	20	50,000	Yes	Damp

Performance Data

The tables below show the LumenChoice LED tubes in combination with regular fixed wattage driver options and LumenChoice™ driver options that will result in different lumen levels.

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

UL 1993 Environmental Requirements for LED LAMPS

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

LumenChoice™ Type C LED Tube and Driver System

Lamp Performance-Regular Drivers

2'-4' Glass and Regular Driver									
4ft Glass				Driver		LED12T8/DR/XX	LED15T8/DR/XX	LED18T8/DR/XX	LED21T8/DR/XX
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage		12W	15W	18W	21W
34211	LEDT8/LC/G/4/830	3000K	Yes*	Initial Lumens		1550	1900	2250	2650
34227	LEDT8/LC/G/4/835	3500K	Yes*			1600	1950	2300	2700
34235	LEDT8/LC/G/4/840	4000K	Yes*			1600	1950	2300	2700
34239	LEDT8/LC/G/4/850	5000K	Yes*			1600	1950	2300	2700
4ft US Glass				Driver		LED12T8/DR/XX	LED15T8/DR/XX	LED18T8/DR/XX	LED21T8/DR/XX
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage		12W	15W	18W	21W
36385	LEDT8LC/G4/830US	3000K	Yes*	Initial Lumens		1550	1900	2250	2650
36386	LEDT8LC/G4/835US	3500K	Yes*			1600	1950	2300	2700
36389	LEDT8LC/G4/840US	4000K	Yes*			1600	1950	2300	2700
36390	LEDT8LC/G4/850US	5000K	Yes*			1600	1950	2300	2700
3ft Glass				Driver		LED12T8/DR/XX	LED15T8/DR/XX	LED18T8/DR/XX	
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage		12W	15W	18W	
36394	LEDT8/LC/G/3/830	3000K	-	Initial Lumens		1550	1900	2250	
36395	LEDT8/LC/G/3/835	3500K	-			1600	1950	2300	
36398	LEDT8/LC/G/3/840	4000K	-			1600	1950	2300	
36401	LEDT8/LC/G/3/850	5000K	-			1600	1950	2300	
2ft Glass				Driver		LED9T8/DR/XX	LED12T8/DR/XX		
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage		9W	12W		
36406	LEDT8/LC/G/2/830	3000K	-	Initial Lumens		1100	1450		
36408	LEDT8/LC/G/2/835	3500K	-			1200	1550		
36409	LEDT8/LC/G/2/840	4000K	-			1200	1550		
36413	LEDT8/LC/G/2/850	5000K	-			1200	1550		

*NOTE: 12W Driver is not DLC Listed

2'-4' Plastic and Regular Driver									
4ft Plastic				Driver		LED12T8/DR/XX	LED15T8/DR/XX	LED18T8/DR/XX	LED21T8/DR/XX
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage		12W	15W	18W	21W
34248	LEDT8/LC/4/830	3000K	Yes*	Initial Lumens		1550	1850	2200	2600
34249	LEDT8/LC/4/835	3500K	Yes*			1550	1900	2250	2650
34250	LEDT8/LC/4/840	4000K	Yes*			1550	1900	2250	2650
34253	LEDT8/LC/4/850	5000K	Yes*			1550	1900	2250	2650
34262	LEDT8/LC/4/865	6500K	Yes*			1500	1800	2100	2500
3ft Plastic				Driver		LED12T8/DR/XX	LED15T8/DR/XX	LED18T8/DR/XX	
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage		12W	15W	18W	
36416	LEDT8/LC/3/830	3000K	-	Initial Lumens		1500	1850	2200	
36419	LEDT8/LC/3/835	3500K	-			1550	1900	2250	
36420	LEDT8/LC/3/840	4000K	-			1550	1900	2250	
36435	LEDT8/LC/3/850	5000K	-			1550	1900	2250	
36436	LEDT8/LC/3/865	6500K	-			1500	1800	2150	
2ft Plastic				Driver		LED9T8/DR/XX	LED12T8/DR/XX		
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage		9W	12W		
36437	LEDT8/LC/2/830	3000K	-	Initial Lumens		1150	1500		
36439	LEDT8/LC/2/835	3500K	-			1250	1600		
36440	LEDT8/LC/2/840	4000K	-			1250	1600		
36453	LEDT8/LC/2/850	5000K	-			1250	1600		
36459	LEDT8/LC/2/865	6500K	-			1250	1600		

*NOTE: 12W Driver is not DLC Listed

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

UL 1993 Environmental Requirements for LED LAMPS

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

LumenChoice™ Type C LED Tube and Driver System

Lamp Performance-LumenChoice™ Drivers (Limited Availability - Rolling Transition)



2'-4' Glass and LumenChoice Driver										
4ft Glass				Driver	Low	Watt	LumenChoice	21378 - LED/DR/D2L/LW 21379 - LED/DR/D4L/LW		
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage	8W	9W	12W	15W	16.5W	Notes
34211	LEDT8/LC/G/4/830	3000K	Yes	Initial Lumens	1050	1150	1550	1900	2000	
34227	LEDT8/LC/G/4/835	3500K	Yes		1050	1200	1600	1950	2050	
34235	LEDT8/LC/G/4/840	4000K	Yes		1050	1200	1600	1950	2050	
34239	LEDT8/LC/G/4/850	5000K	Yes		1050	1200	1600	1950	2050	
4ft Glass				Driver	High	Watt	LumenChoice	21383 - LED/DR/D2L/HW 21392 - LED/DR/D4L/HW *4L driver Max Setting at 21W per lamps		
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage	18W	19.5W	21W	23W*	25W*	Notes
34211	LEDT8/LC/G/4/830	3000K	Yes	Initial Lumens	2250	2500	2650	2850	2950	
34227	LEDT8/LC/G/4/835	3500K	Yes		2300	2550	2700	2900	3000	
34235	LEDT8/LC/G/4/840	4000K	Yes		2300	2550	2700	2900	3000	
34239	LEDT8/LC/G/4/850	5000K	Yes		2300	2550	2700	2900	3000	
4ft US Glass				Driver	Low	Watt	LumenChoice	21378 - LED/DR/D2L/LW 21379 - LED/DR/D4L/LW		
Lamp Product Code	Lamp Description	CCT		Wattage	8W	9W	12W	15W	16.5W	
36385	LEDT8LC/G4/830US	3000K	-	Initial Lumens	1050	1150	1550	1900	2000	
36386	LEDT8LC/G4/835US	3500K	-		1050	1200	1600	1950	2050	
36389	LEDT8LC/G4/840US	4000K	-		1050	1200	1600	1950	2050	
36390	LEDT8LC/G4/850US	5000K	-		1050	1200	1600	1950	2050	
4ft US Glass				Driver	High	Watt	LumenChoice	21383 - LED/DR/D2L/HW 21392 - LED/DR/D4L/HW *4L driver Max Setting at 21W per lamps		
Lamp Product Code	Lamp Description	CCT		Wattage	18W	19.5W	21W	23W*	25W*	
36385	LEDT8LC/G4/830US	3000K	-	Initial Lumens	2250	2500	2650	2850	2950	
36386	LEDT8LC/G4/835US	3500K	-		2300	2550	2700	2900	3000	
36389	LEDT8LC/G4/840US	4000K	-		2300	2550	2700	2900	3000	
36390	LEDT8LC/G4/850US	5000K	-		2300	2550	2700	2900	3000	
3ft Glass				Driver	Low	Watt	LumenChoice	21378 - LED/DR/D2L/LW 21379 - LED/DR/D4L/LW		
Lamp Product Code	Lamp Description	CCT		Wattage	8W	9W	12W	15W	16.5W	
36394	LEDT8/LC/G/3/830	3000K	-	Initial Lumens	1050	1150	1550	1900	2050	
36395	LEDT8/LC/G/3/835	3500K	-		1050	1200	1600	1950	2100	
36398	LEDT8/LC/G/3/840	4000K	-		1050	1200	1600	1950	2100	
36401	LEDT8/LC/G/3/850	5000K	-		1050	1200	1600	1950	2100	
2ft Glass				Driver	Low	Watt	LumenChoice	21378 - LED/DR/D2L/LW 21379 - LED/DR/D4L/LW		
Lamp Product Code	Lamp Description	CCT		Wattage	8W	9W	12W			
36406	LEDT8/LC/G/2/830	3000K	-	Initial Lumens	1000	1100	1450			
36408	LEDT8/LC/G/2/835	3500K	-		1050	1200	1550			
36409	LEDT8/LC/G/2/840	4000K	-		1050	1200	1550			
36413	LEDT8/LC/G/2/850	5000K	-		1050	1200	1550			

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

UL 1993 Environmental Requirements for LED LAMPS

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment,

and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

LumenChoice™ Type C LED Tube and Driver System

Lamp Performance-LumenChoice™ Drivers (Limited Availability - Rolling Transition)



2'-4' Plastic and LumenChoice Driver										
4ft Plastic				Driver	Low	Watt	LumenChoice Driver		21378 - LED/DR/D2L/LW 21379 - LED/DR/D4L/LW	
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage	8W	9W	12W	15W	16.5W	Notes
34248	LEDT8/LC/4/830	3000K	-	Initial Lumens	1000	1100	1500	1850	1950	
34249	LEDT8/LC/4/835	3500K	-		1000	1150	1550	1900	2000	
34250	LEDT8/LC/4/840	4000K	-		1000	1150	1550	1900	2000	
34253	LEDT8/LC/4/850	5000K	-		1000	1150	1550	1900	2000	
34262	LEDT8/LC/4/865	6500K	-		950	1100	1500	1800	1900	
4ft Plastic				Driver	High	Watt	LumenChoice Driver		21383 - LED/DR/D2L/HW 21392 - LED/DR/D4L/HW*4L driver Max Setting at 21W per lamps	
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage	18W	19.5W	21W	23W*	25W*	
34248	LEDT8/LC/4/830	3000K	-	Initial Lumens	2200	2450	2600	2800	2950	
34249	LEDT8/LC/4/835	3500K	-		2250	2500	2650	2850	3000	
34250	LEDT8/LC/4/840	4000K	-		2250	2500	2650	2850	3000	
34253	LEDT8/LC/4/850	5000K	-		2250	2500	2650	2850	3000	
34262	LEDT8/LC/4/865	6500K	-		2100	2350	2500	2700	2850	
3ft Plastic				Driver	Low	Watt	LumenChoice Driver		21378 - LED/DR/D2L/LW 21379 - LED/DR/D4L/LW	
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage	8W	9W	12W	15W	16.5W	
36416	LEDT8/LC/3/830	3000K	-	Initial Lumens	1000	1100	1500	1850	2000	
36419	LEDT8/LC/3/835	3500K	-		1000	1150	1550	1900	2050	
36420	LEDT8/LC/3/840	4000K	-		1000	1150	1550	1900	2050	
36435	LEDT8/LC/3/850	5000K	-		1000	1150	1550	1900	2050	
36436	LEDT8/LC/3/865	6500K	-		950	1100	1500	1800	1950	
2ft Plastic				Driver	Low	Watt	LumenChoice Driver		21378 - LED/DR/D2L/LW 21379 - LED/DR/D4L/LW	
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage	8W	9W	12W			
36437	LEDT8/LC/2/830	3000K	-	Initial Lumens	1050	1150	1500			
36439	LEDT8/LC/2/835	3500K	-		1100	1250	1600			
36440	LEDT8/LC/2/840	4000K	-		1100	1250	1600			
36453	LEDT8/LC/2/850	5000K	-		1100	1250	1600			
36459	LEDT8/LC/2/865	6500K	-		1100	1250	1600			

LumenChoice™ Type C LED Tube and Driver System with reveal® TriGain™ Technology

Lamp Performance-Regular Drivers

2'-4' Glass and Regular Driver									
4ft Glass				Driver	LED12T8/DR/XX		LED15T8/DR/XX	LED18T8/DR/XX	
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage	12W	15W	18W	Notes	
34271	LEDT8/LC/G/4/935	3500K	-	Initial Lumens	1650	1950	2350	MTO, 12 Weeks	
34273	LEDT8/LC/G/4/940	4000K	-		1700	2000	2400	MTO, 12 Weeks	
34276	LEDT8/LC/G/4/950	5000K	-		1700	2050	2450	MTO, 12 Weeks	
3ft Glass				Driver	LED12T8/DR/XX		LED15T8/DR/XX		
Lamp Product Code	Lamp Description	CCT		Wattage	12W	15W			
36338	LEDT8/LC/G/3/935	3500K	-	Initial Lumens	1600	1850	MTO, 12 Weeks		
36355	LEDT8/LC/G/3/940	4000K	-		1650	1900	MTO, 12 Weeks		
36362	LEDT8/LC/G/3/950	5000K	-		1700	1900	MTO, 12 Weeks		
2ft Glass				Driver	LED9T8/DR/XX				
Lamp Product Code	Lamp Description	CCT		Wattage	9W				
36371	LEDT8/LC/G/2/935	3500K	-	Initial Lumens	1000	MTO, 12 Weeks			
36378	LEDT8/LC/G/2/940	4000K	-		1100	MTO, 12 Weeks			
36383	LEDT8/LC/G/2/950	5000K	-		1100	MTO, 12 Weeks			

Lamp Performance-LumenChoice™ Drivers

2'-4' Glass and LumenChoice Driver										
4ft Glass				Driver	Low Watt LumenChoice Driver		21378 - LED/DR/D2L/LW 21379 - LED/DR/D4L/LW			
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage	8W	9W	12W	15W	16.5W	Notes
34271	LEDT8/LC/G/4/935	3500K	-	Initial Lumens	1050	1200	1650	1950	2100	MTO, 12 Weeks
34273	LEDT8/LC/G/4/940	4000K	-		1100	1250	1700	2000	2150	MTO, 12 Weeks
34276	LEDT8/LC/G/4/950	5000K	-		1100	1250	1700	2050	2250	MTO, 12 Weeks

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

UL 1993 Environmental Requirements for LED LAMPs

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

LumenChoice™ Type C LED Tube and Driver System

Lamp Performance-Regular Drivers



2'-4' T5 HO and Regular Driver

4ft Glass				Driver	LED18T8/DR/XX LED21T8/DR/XX LED36T8/DR/XX			
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage	18W	21W	36W	Notes
38926	LEDT5/LC/G/4/830	3000K	-	Initial Lumens	2100	2500	4300	
38394	LEDT5/LC/G/4/835	3500K	-		2150	2500	4350	
38940	LEDT5/LC/G/4/840	4000K	-		2200	2550	4400	
38946	LEDT5/LC/G/4/850	5000K	-		2200	2550	4400	
3ft Glass				Driver	LED15T8/DR/XX LED18T8/DR/XX LED21T8/DR/XX			
Lamp Product Code	Lamp Description	CCT		Wattage	15W	18W	21W	
38947	LEDT5/LC/G/3/830	3000K	-	Initial Lumens	1750	2100	2500	
38948	LEDT5/LC/G/3/835	3500K	-		1800	2150	2550	
38949	LEDT5/LC/G/3/840	4000K	-		1850	2200	2600	
38955	LEDT5/LC/G/3/850	5000K	-		1850	2200	2600	
2ft Glass				Driver	LED9T8/DR/XX LED12T8/DR/XX LED15T8/DR/XX LED18T8/DR/XX			
Lamp Product Code	Lamp Description	CCT		Wattage	9W	12W	15W	18W
38968	LEDT5/LC/G/2/830	3000K	-	Initial Lumens	1050	1400	1800	2150
38980	LEDT5/LC/G/2/835	3500K	-		1100	1450	1850	2200
38983	LEDT5/LC/G/2/840	4000K	-		1150	1500	1900	2250
38992	LEDT5/LC/G/2/850	5000K	-		115	1500	1900	2250

2'-4' T5 HE and Regular Driver

4ft Glass				Driver	LED12T8/DR/XX	LED15T8/DR/XX	LED18T8/DR/XX	LED21T8/DR/XX	
Lamp Product Code	Lamp Description	CCT	DLC*	Wattage	12W	15W	18W	21W	Notes
38993	LEDT5/LC/G4/830HE	3000K	-	Initial Lumens	1500	1900	2250	2650	
38995	LEDT5/LC/G4/835HE	3500K	-		1500	1950	2300	2700	
38998	LEDT5/LC/G4/840HE	4000K	-		1550	2000	2350	2750	
38999	LEDT5/LC/G4/850HE	5000K	-		1550	2000	2350	2750	
3ft Glass				Driver	LED9T8/DR/XX	LED12T8/DR/XX	LED15T8/DR/XX		
Lamp Product Code	Lamp Description	CCT		Wattage	9W	12W	15W		
39000	LEDT5/LC/G3/830HE	3000K	-	Initial Lumens	1100	1500	1850		
39001	LEDT5/LC/G3/835HE	3500K	-		1150	1550	1900		
39002	LEDT5/LC/G3/840HE	4000K	-		1150	1600	1950		
39003	LEDT5/LC/G3/850HE	5000K	-		1150	1600	1950		
2ft Glass				Driver	LED9T8/DR/XX	LED12T8/DR/XX	LED15T8/DR/XX		
Lamp Product Code	Lamp Description	CCT		Wattage	9W	12W	15W		
39004	LEDT5/LC/G2/830HE	3000K	-	Initial Lumens	1100	1450	1800		
39005	LEDT5/LC/G2/835HE	3500K	-		1150	1500	1850		
39006	LEDT5/LC/G2/840HE	4000K	-		1200	1550	1900		
39016	LEDT5/LC/G2/850HE	5000K	-		1200	1550	1900		

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

** Minimum order quantity = 6

★ ENERGY STAR® status: ENERGY STAR® certified. Lamps without a ★ are not ENERGY STAR® certified.

UL 1993 Environmental Requirements for LED LAMPS

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

1) Product descriptions ending in "/TP" indicate a carded blister or clamshell package nested in a tray for shelf display. Cards also designed for hook display.

LumenChoice™ Type C LED Tube and Driver System

Lamp Performance-LumenChoice™ Drivers (Limited Availability - Rolling Transition)



2'-4' T5 HO and LumenChoice Driver										
4ft Glass				Driver	High	Watt	LumenChoice	21383 - LED/DR/D2L/HW 21392 - LED/DR/D4L/HW*4L driver Max Setting at 21W per lamps		
Lamp Product Code	Lamp Description	CCT	DLC ⁺	Wattage	18W	19.5W	21W	23W*	25W*	Notes
38926	LEDT5/LC/G/4/830	3000K	-	Initial Lumens	2100	2250	2500	2700	2950	
38394	LEDT5/LC/G/4/835	3500K	-		2150	2300	2500	2750	3000	
38940	LEDT5/LC/G/4/840	4000K	-		2200	2350	2550	2800	3050	
38946	LEDT5/LC/G/4/850	5000K	-		2200	2350	2550	2800	3050	
3ft Glass				Driver	High	Watt	LumenChoice	21383 - LED/DR/D2L/HW 21392 - LED/DR/D4L/HW*4L driver Max Setting at 21W per lamps		
Lamp Product Code	Lamp Description	CCT		Wattage	18W	19.5W	21W	23W*	25W*	
38947	LEDT5/LC/G/3/830	3000K	-	Initial Lumens	2100	2300	2500	2700	2950	
38948	LEDT5/LC/G/3/835	3500K	-		2150	2350	2550	2750	3000	
38949	LEDT5/LC/G/3/840	4000K	-		2200	2400	2600	2800	3050	
38955	LEDT5/LC/G/3/850	5000K	-		2200	2400	2600	2800	3050	
2ft Glass				Driver	Low	Watt	LumenChoice	21378 - LED/DR/D2L/LW 21379 - LED/DR/D4L/LW		
Lamp Product Code	Lamp Description	CCT		Wattage	8W	9W	12W	15W	16.5W	
38968	LEDT5/LC/G/2/830	3000K	-	Initial Lumens	950	1050	1400	1800	1950	
38980	LEDT5/LC/G/2/835	3500K	-		950	1100	1450	1850	2000	
38983	LEDT5/LC/G/2/840	4000K	-		1000	1150	1500	1900	2050	
38992	LEDT5/LC/G/2/850	5000K	-		1000	1150	1500	1900	2050	
2'-4' T5 HE and LumenChoice Driver										
4ft Glass				Driver	High	Watt	LumenChoice	21383 - LED/DR/D2L/HW 21392 - LED/DR/D4L/HW*4L driver Max Setting at 21W per lamps		
Lamp Product Code	Lamp Description	CCT	DLC ⁺	Wattage	18W	19.5W	21W	23W*	25W*	Notes
38993	LEDT5/LC/G4/830HE	3000K	-	Initial Lumens	2250	2450	2650	2900	3150	
38995	LEDT5/LC/G4/835HE	3500K	-		2300	2500	2700	2950	3200	
38998	LEDT5/LC/G4/840HE	4000K	-		2350	2550	2750	3000	3250	
38999	LEDT5/LC/G4/850HE	5000K	-		2350	2550	2750	3000	3250	
4ft Glass				Driver	Low	Watt	LumenChoice	21378 - LED/DR/D2L/LW 21379 - LED/DR/D4L/LW		
Lamp Product Code	Lamp Description	CCT		Wattage	8W	9W	12W	15W	16.5W	
38993	LEDT5/LC/G4/830HE	3000K	-	Initial Lumens	1000	1100	1500	1900	2050	
38995	LEDT5/LC/G4/835HE	3500K	-		1000	1150	1500	1950	2100	
38998	LEDT5/LC/G4/840HE	4000K	-		1050	1200	1550	2000	2150	
38999	LEDT5/LC/G4/850HE	5000K	-		1050	1200	1550	2000	2150	
3ft Glass				Driver	Low	Watt	LumenChoice	21378 - LED/DR/D2L/LW 21379 - LED/DR/D4L/LW		
Lamp Product Code	Lamp Description	CCT		Wattage	8W	9W	12W	15W	16.5W	
39000	LEDT5/LC/G3/830HE	3000K	-	Initial Lumens	950	1100	1500	1850	2050	
39001	LEDT5/LC/G3/835HE	3500K	-		1000	1150	1550	1900	2100	
39002	LEDT5/LC/G3/840HE	4000K	-		1050	1150	1600	1950	2150	
39003	LEDT5/LC/G3/850HE	5000K	-		1050	1150	1600	1950	2150	
2ft Glass				Driver	Low	Watt	LumenChoice	21378 - LED/DR/D2L/LW 21379 - LED/DR/D4L/LW		
Lamp Product Code	Lamp Description	CCT		Wattage	8W	9W	12W	15W	16.5W	
39004	LEDT5/LC/G2/830HE	3000K	-	Initial Lumens	950	1100	1450	1800	2000	
39005	LEDT5/LC/G2/835HE	3500K	-		1000	1150	1500	1850	2050	
39006	LEDT5/LC/G2/840HE	4000K	-		1050	1200	1550	1900	2100	
39016	LEDT5/LC/G2/850HE	5000K	-		1050	1200	1550	1900	2100	

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

** Minimum order quantity = 6

★ ENERGY STAR® status: ENERGY STAR® certified. Lamps without a ★ are not ENERGY STAR® certified.

UL 1993 Environmental Requirements for LED LAMPS

Location, damp — Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry — Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet — Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

Notes: 1) Product descriptions ending in "TP" indicate a carded blister or clamshell package nested in a tray for shelf display. Cards also designed for hook display.

LED Replacement Drivers



Regular Driver Product Specifications

Type	Watts	Order Code	Description	Volts	Case Qty**	Output Current (A)	Frequency	Eff	Output	Output Voltage	Temp (Min)	Temp (Max)	Dimmable	Additional Information
Lichtech Drivers - Non-Dimming														
	18	93100	LED9T8/DR/UN/2L	120-277V	10	0.27x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	-	Maximum 2 Tubes (non potted)
	24	76289	LED12T8/DR/2L	120-277V	10	0.21x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	-	Maximum 2 Tubes
	30	38970	LED15T8/DR/UN/2L	120-277V	10	0.44x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	-	Maximum 2 Tubes (non potted)
	36	82347	LED18T8/DR/UN/2L	120-277V	10	0.53x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	-	Maximum 2 Tubes (non potted)
	21	94384	LED21T8/DR/1L	120-277V	10	0.62	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	-	Maximum 1 Tube
	42	94385	LED21T8/DR/2L	120-277V	10	0.62x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	-	Maximum 2 Tubes
Lichtech Drivers - Dimming														
	24	76290	LED12T8/DR/D2L	120-277V	10	0.21x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Maximum 2 Tubes
	48	76318	LED12T8/DR/D4L	120-277V	10	0.21x4	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Maximum 4 Tubes
	42	28174	LED14/DR/D3L	120-277V	10	0.43x3	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Maximum 3 Tubes
	30	38974	LED15T8/DR/D2L	120-277V	10	0.44x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Maximum 2 Tubes
	60	38975	LED15T8/DR/D4L	120-277V	10	0.44x4	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Maximum 4 Tubes
	36	88141	LED18T8/DR/D2L	120-277V	10	0.53x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Maximum 2 Tubes
	72	88139	LED18T8/DR/D4L	120-277V	10	0.53x4	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Maximum 4 Tubes
	42	60041	LED21T8/DR/D2L	120-277V	10	0.62x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Maximum 2 Tubes
	84	62030	LED21T8/DR/D4L	120-277V	10	0.62x4	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Maximum 4 Tubes
	72	63126	LED36T8/DR/D2L	120-277V	10	1.06x2	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Maximum 2 Tubes
	144	92013	LED36T8/DR/D4L	120-277V	10	1.06x4	50/60 Hz	>.9	DC	26-34V	-4 F	113 F	Yes	Maximum 4 Tube

LumenChoice™ Drivers Product Specifications (Limited Availability - Rolling Transition)

Type	Watts	Order Code	Description	Volts	Case Qty**	Output Current (A)	Frequency	Eff	Output	Output Voltage	Temp (Min)	Temp (Max)	Dimmable	Additional Information
Lumen Choice Drivers - Dimming														
	33	21378	LED/DR/D2L/LW	120-277V	10	0.48x2	50/60 Hz	>.9	DC	26-34V	-4 F	104 F	Yes	Max 2 Tubes: 15W per tube default setting
	66	21379	LED/DR/D4L/LW	120-277V	10	0.48x4	50/60 Hz	>.9	DC	26-34V	-4 F	104 F	Yes	Max 4 Tubes: 15W per tube default setting
	50	21383	LED/DR/D2L/HW	120-277V	10	0.72x2	50/60 Hz	>.9	DC	26-34V	-4 F	104 F	Yes	Max 2 Tubes: 21W per tube default setting
	100	21392	LED/DR/D4L/HW	120-277V	10	0.72x4	50/60 Hz	>.9	DC	26-34V	-4 F	104 F	Yes	Max 4 Tubes: 21W per tube default setting

Updated / New Product

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

UL 1993 Environmental Requirements for LED LAMPS

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

GE current
a Daintree company

www.gecurrent.com

GE and the GE Monogram are trademarks of the General Electric Company and are used under license. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions, and Current makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions. © 2020 GE Current, a Daintree company

LEDL047 (Rev 01/24/20)