

Miniliter® V MHS

Compact Wide Beam Floodlight

- Sign, facade, area, accent and general security lighting
- Die-cast housing and door, rugged but lightweight
- Tempered glass lens
- Tool-free entry for lamping or maintenance, silicone gasket provides seal
- Steel yoke (MHS-Y) or cast aluminum 2 3/8" knuckle slipfitter (MHS-K) mounting
- HPF ballast in Quad-Tap® and 480V (consult listings below)
- Wide, uniform beam for illumination of signs, facades and large areas; coverage is four times set back distance; lamp included
- UST fixtures are built in Christiansburg, VA and meet ARRA level 2 requirements
- Available in dark bronze powder paint finish
- Listed to UL1598 for use in wet locations, CSA 22.2 No. 250.0-00, suitable for wet locations
- U.S. Patent No. 6,461,026



MHS-Y (Yoke Mount)



ORDERING INFORMATION – STOCK

Catalog Number	Lamp Type/Wattage ¹	Voltage	Weight lbs. (kg)
Pulse Start Metal Halide Yoke Mount			
MHS-Y400P8	400W PS ED37	Quad-Tap® (120, 208, 240, 277V)	26 (11.8)
MHS-Y250P8	250W PS ED28	Quad-Tap® (120, 208, 240, 277V)	22 (10.0)
MHS-Y150P8	150W MH ED28	Quad-Tap® (120, 208, 240, 277V)	21 (9.5)
Pulse Start Metal Halide Knuckle Mount			
MHS-K400P8	400W PS ED37	Quad-Tap® (120, 208, 240, 277V)	31 (14.1)
MHS-K250P8	250W PS ED28	Quad-Tap® (120, 208, 240, 277V)	27 (12.2)



¹ All fixtures have dark bronze powder finish and are shipped with mogul base lamp; NOTE: EPA is 1.4 sq. ft.

ACCESSORIES - Order Separately

Catalog Number	Description
PBT-1	Photocontrol, button type, 120V
PBT-234	Photocontrol, button type, 208, 240, 277V
MHS4-SPC	Polycarbonate shield (for independent use only)
MHS4-G	Wire guard, 2" square grid (for independent use only)
4024C	Steel slipfitter for 2" pipe, 2 3/8" OD yoke mount, bronze finish
MHS4-GS	Glare shield, black finish (for independent use only)
MHS4-VGS	Vertical glare shield, black finish (for independent use only)
MHS4-HGS	Horizontal glare shield, black finish (for independent use only)
MHS-21	Two light bracket, bolt on yoke mount, slipfits 2 3/8" OD tenons, bronze finish
SSB-21-M51	Two light bracket, knuckle mount units, slipfits 2 3/8" OD tenons, bronze finish
TWK-11	Steel wall bracket with 2 3/8" tenon, bronze finish (use with MHS-K)

ORDERING INFORMATION – UST

MHS	-		-		-		-	UST	-			
SERIES		MOUNTING		WATTAGE/SOURCE		VOLTS		FINISH		UST		OPTIONS
MHS Miniliter V Series		Y Yoke		PULSE START METAL HALIDE		5 480V		BZ Bronze		UST U.S. transformed, ARRA level 2		QST Quartz standby Skt/Relay
		K Knuckle		150P 150w PSMH		6 347V		BL Black				EM Quartz Skt
				250P 250w PSMH				WH White				C3 3ft. 16/3 SO
				320P 320w PSMH		8 Quad Tap® (120, 208, 240, 277V)		GR Gray				C6 3ft. 16/3 SO
				400P 400w PSMH				PS Platinum				PR(X) NEMA Photo cell receptacle (replace X with voltage: 1=120V, 2=208V, 3=240V, 4=277V, 5=480V, 6=347V)
				HIGH PRESSURE SODIUM				CC Custom Color				F(X) Fusing (replace X with voltage: 1-120V, 2-208V, 3-240V, 4-277V, 5-480V, 6-347V)
				150S 150w HPS								
				250S 250w HPS								
				400S 400w HPS								

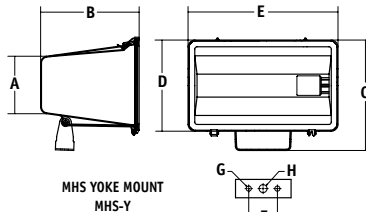

A	B	C	D	E	F	G	H	I
6 1/2"	14 1/2"	12"	9 7/8"	16 1/4"	3 1/8"	17/32"	7/8"	17"
165 mm	368 mm	305 mm	251 mm	413 mm	79 mm	14 mm	22 mm	432 mm

