

BALDOR® • ***RELIANCE***

Product Information Packet

CDPWD3330

.5HP,1750RPM,DC,56C,3336P,TENV,F1

Part Detail							
Revision:	AN	Status:	PRD/A	Change #:		Proprietary:	No
Type:	DC	Prod. Type:	3336P	Elec. Spec:	33WGZ122	CD Diagram:	CD0194
Enclosure:	TENV	Mfg Plant:		Mech. Spec:	33-2142	Layout:	33LY2142
Frame:	56C	Mounting:	F1	Poles:	00	Created Date:	
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	11-08-2013
Field Type:		Literature:		Elec. Diagram:		Replaced By:	

Specs			
Enclosure:	TENV		
Frame:	56C		
Frame Material:	Steel		
Agency Approvals:	CE		
	CSA		
	UR		
Base Indicator:	Rigid		
Bearing Grease Type:	Polyrex EM (-20F +300F)		
Drip Cover:	No Drip Cover		
Duty Rating:	CONT		
Feedback Device:	NO FEEDBACK		
Heater Indicator:	No Heater		
Insulation Class:	F		
Lifting Lugs:	No Lifting Lugs		
Motor Lead Quantity/Wire Size:	2 @ 18 AWG, A		
Motor Lead Exit:	Ko Box		

Motor Lead Termination:	Flying Leads		
Mounting Arrangement:	F1		
Product Family:	Wash Down		
Pulley End Bearing Type:	Sealed Bearing		
RoHS Status:	ROHS COMPLIANT		
Shaft Extension Location:	Pulley End		
Shaft Ground Indicator:	No Shaft Grounding		
Shaft Rotation:	Reversible		
Shaft Slinger Indicator:	Shaft Slinger		
Motor Standards:	NEMA		

Nameplate NP1509			
CAT.NO.	CDPWD3330		
SPEC.	33-2142Z122		
HP	.5	ENCL	TENV
RPM	1750		
FRAME	56C	TYPE	3336P
ARM V	90	ARM A	4.8
FLD V		FLD A	
INSUL	F	AMB.	40
DUTY	CONT	SUPPLY	1.3
BRG/DE	6203	BRG/ODE	6203
BRUSHES	2/BP5011T01		
	IP55	BLANK	
SER.			
BLANK			
APRV-CSA	<input type="checkbox"/>	APRV-UL	<input type="checkbox"/>
		APRV-CE	<input type="checkbox"/>

DC Motor Performance Data

Record # 216 - Typical performance - not guaranteed values


Winding: 33WGZ122-R001	Type: 3336P	Enclosure: TENV
-------------------------------	--------------------	------------------------

Nameplate Data		General Characteristics	
Rated Output (HP)	0.5	Armature Resistance @ 25°C	1.22 Ω
R.P.M.	1750		
Armature Volts	90		
Armature Amps	4.8		
Field Volts		Armature Inductance	15.574 mH
Field Amps			
Rating - Duty	40C AMB-CONT		
Form Factor	1.3	Maximum allowable inrush amps	44

Load Characteristics at 90 Armature Volts

Load Point	1	2	3	4	5	6	7
Armature Amps	0.474	2.065	3.656	5.247	6.838	8.429	10.02
R.P.M.	1995	1920	1846	1772	1698	1624	1550
Torque (LB-FT)	0	0.5	1	1.5	2	2.5	3

Performance Graph at 90.0 Arm V, 0.5HP Typical performance - Not guaranteed values

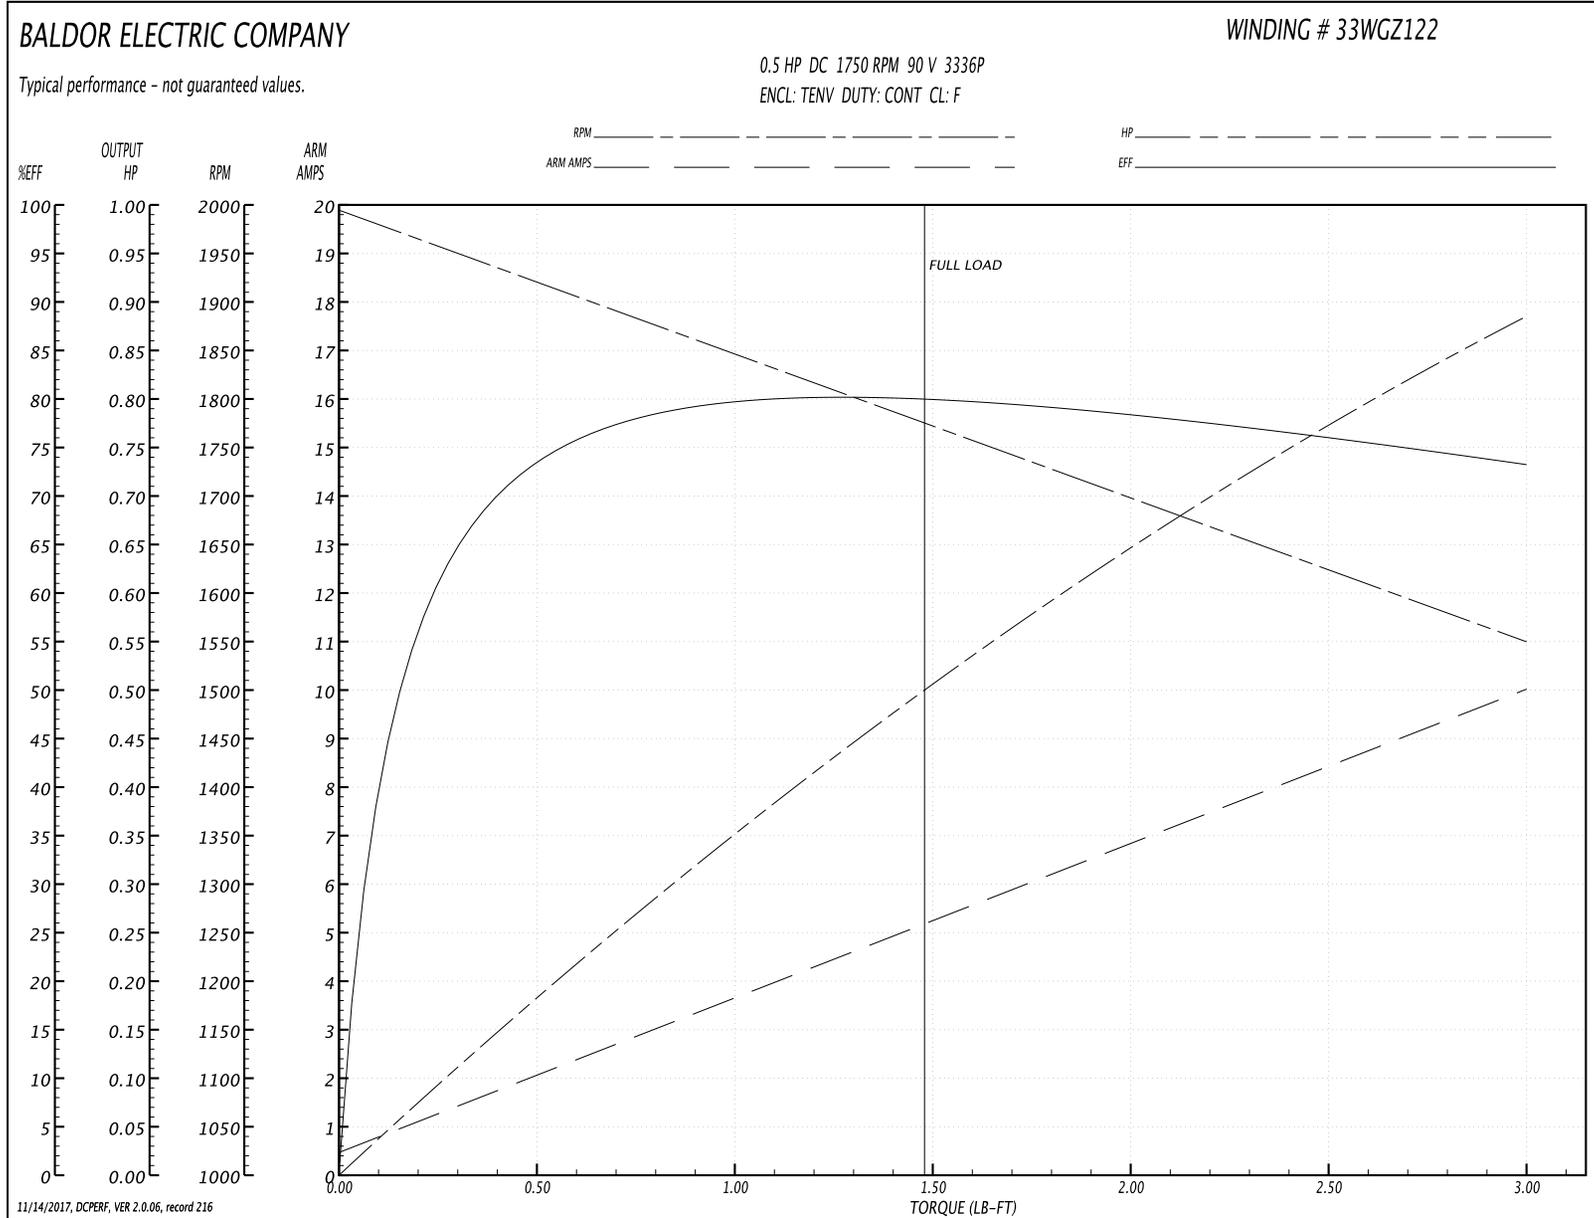

DC Motor Performance Data

Record # 515 - Typical performance - not guaranteed values


Winding: 33WGZ122-R001	Type: 3336P	Enclosure: TENV
-------------------------------	--------------------	------------------------

Nameplate Data		General Characteristics	
Rated Output (HP)	0.5	Armature Resistance @ 25°C	1.2779 Ω
R.P.M.	1750		
Armature Volts	90		
Armature Amps	4.8		
Field Volts		Armature Inductance	15.798 mH
Field Amps			
Rating - Duty	40C AMB-CONT		
Form Factor	1.3		

Load Characteristics at 90 Armature Volts

Load Point	1	2	3	4	5	6	7
Armature Amps	0.24	1.25	2.1	3.15	4.05	5.36	6.25
R.P.M.	1835	1793	1721	1672	1648	1584	1549
Torque (LB-FT)	0	0.38	0.76	1.14	1.5	1.9	2.28

Performance Graph at 90.0 Arm V, 0.5HP Typical performance - Not guaranteed values

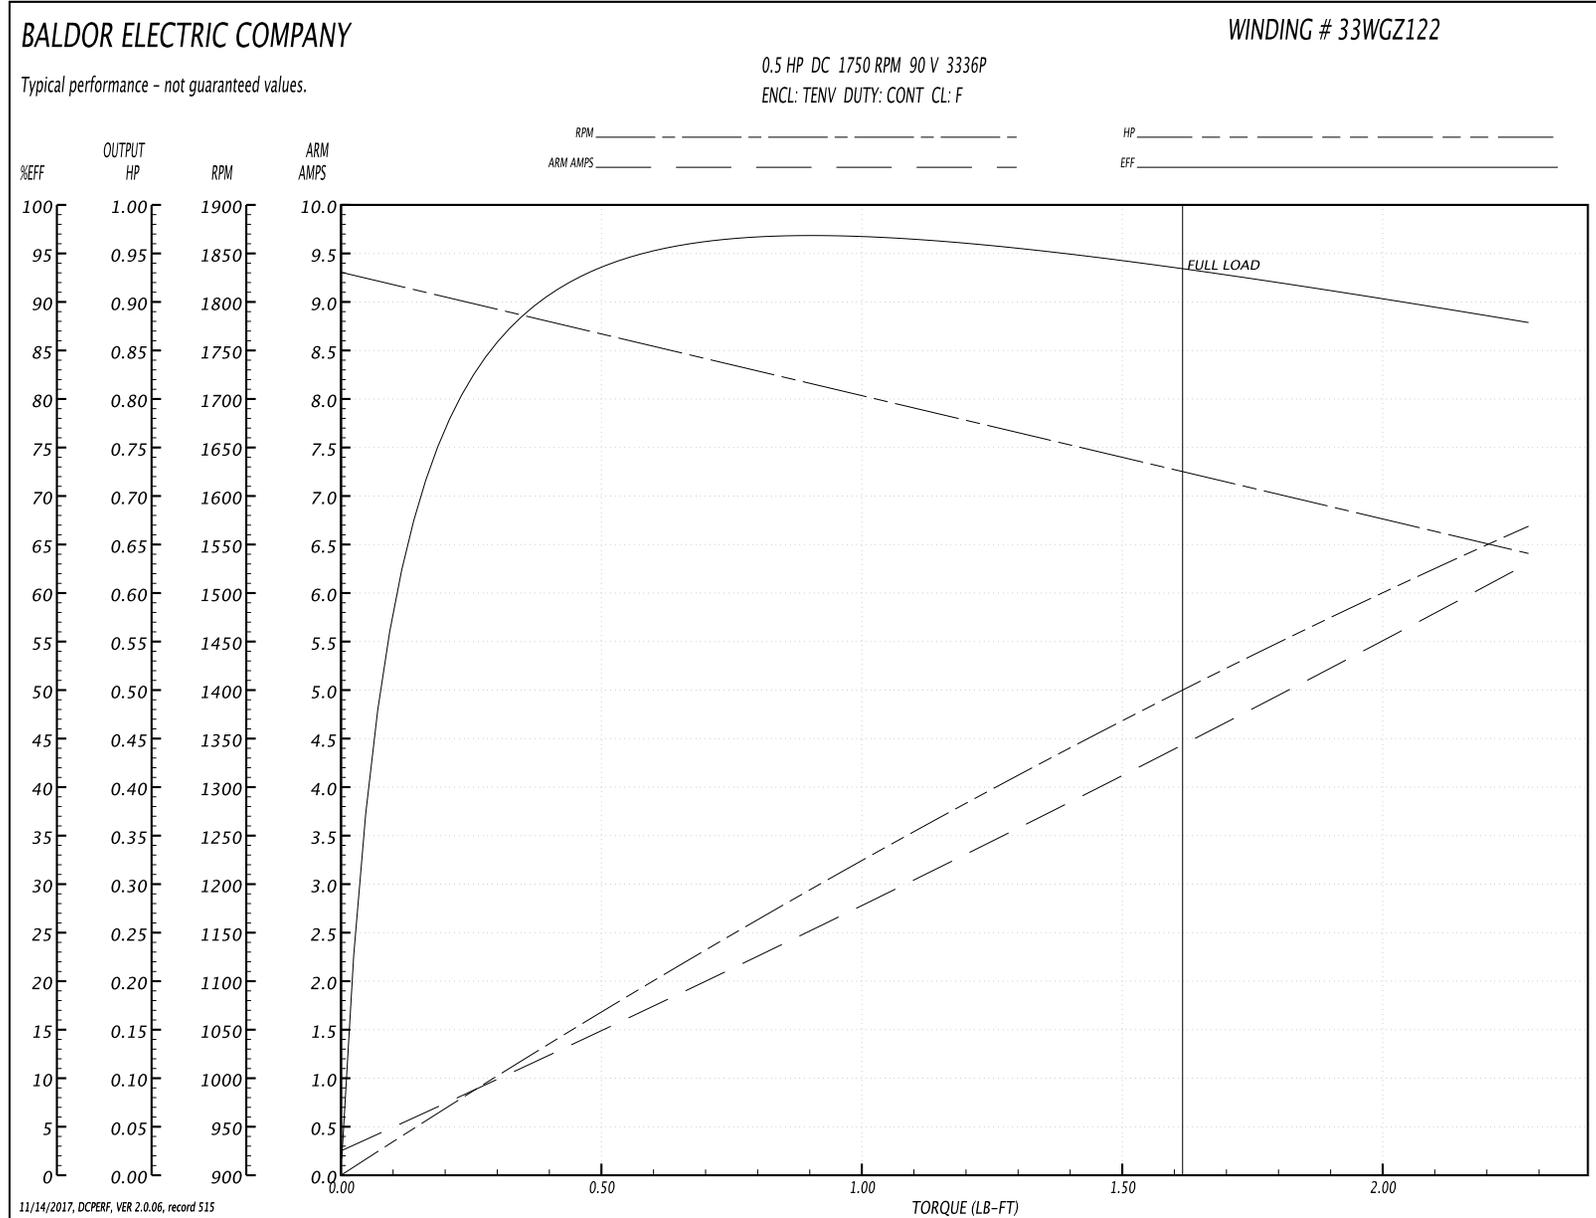

DC Motor Performance Data

Record # 516 - Typical performance - not guaranteed values


Winding: 33WGZ122-R001	Type: 3336P	Enclosure: TENV
-------------------------------	--------------------	------------------------

Nameplate Data		General Characteristics	
Rated Output (HP)	0.5	Armature Resistance @ 25°C	1.2525 Ω
R.P.M.	1750		
Armature Volts	90		
Armature Amps	4.8		
Field Volts		Armature Inductance	15.413 mH
Field Amps			
Rating - Duty	40C AMB-CONT		
Form Factor	1.3		

Load Characteristics at 90 Armature Volts

Load Point	1	2	3	4	5	6	7
Armature Amps	0.24	1.15	2.35	3.16	4.07	5.37	6.3
R.P.M.	1835	1770	1723	1683	1624	1588	1559
Torque (LB-FT)	0	0.38	0.76	1.14	1.5	1.9	2.28

Performance Graph at 90.0 Arm V, 0.5HP Typical performance - Not guaranteed values

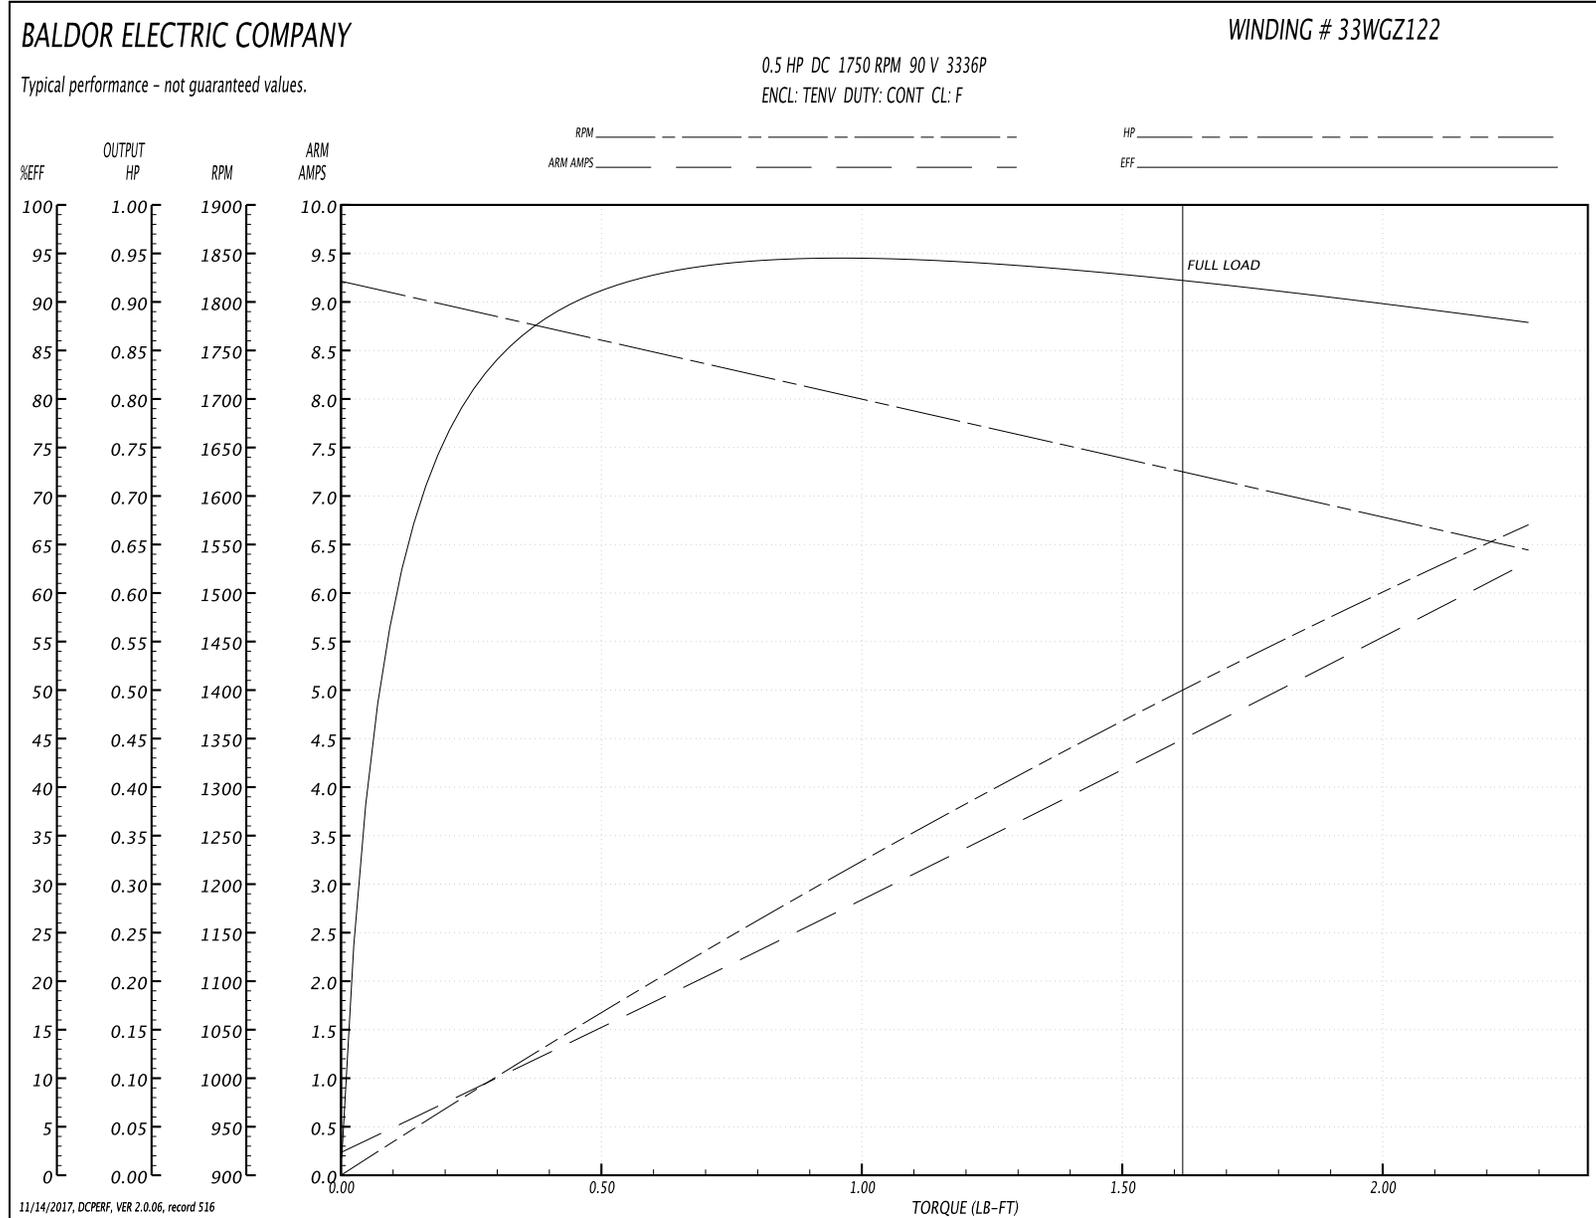

DC Motor Performance Data

Record # 1619 - Typical performance - not guaranteed values


Winding: 33WGZ122-R001	Type: 3336P	Enclosure: TENV
-------------------------------	--------------------	------------------------


Nameplate Data		General Characteristics	
Rated Output (HP)	0.5	Armature Resistance @ 25°C	1.22 Ω
R.P.M.	1750		
Armature Volts	90	Voltage Constant	44.63 v/krpm
Armature Amps	4.8		
Field Volts		Armature Inductance	15.574 mH
Field Amps		Armature Inertia	14.0472 LI ²
Rating - Duty	40C AMB-CONT		
Form Factor	1.3		

Load Characteristics at 90 Armature Volts


Load Point	1	2	3	4	5	6	7
Armature Amps	0.32	6.51	12.7	18.89	25.08	31.28	39.3
R.P.M.	2000	1682	1365	1047	729	412	0.1
Torque (LB-FT)	0	2	4	6	8	10	12.59

Performance Graph at 90.0 Arm V, 0.5HP Typical performance - Not guaranteed values

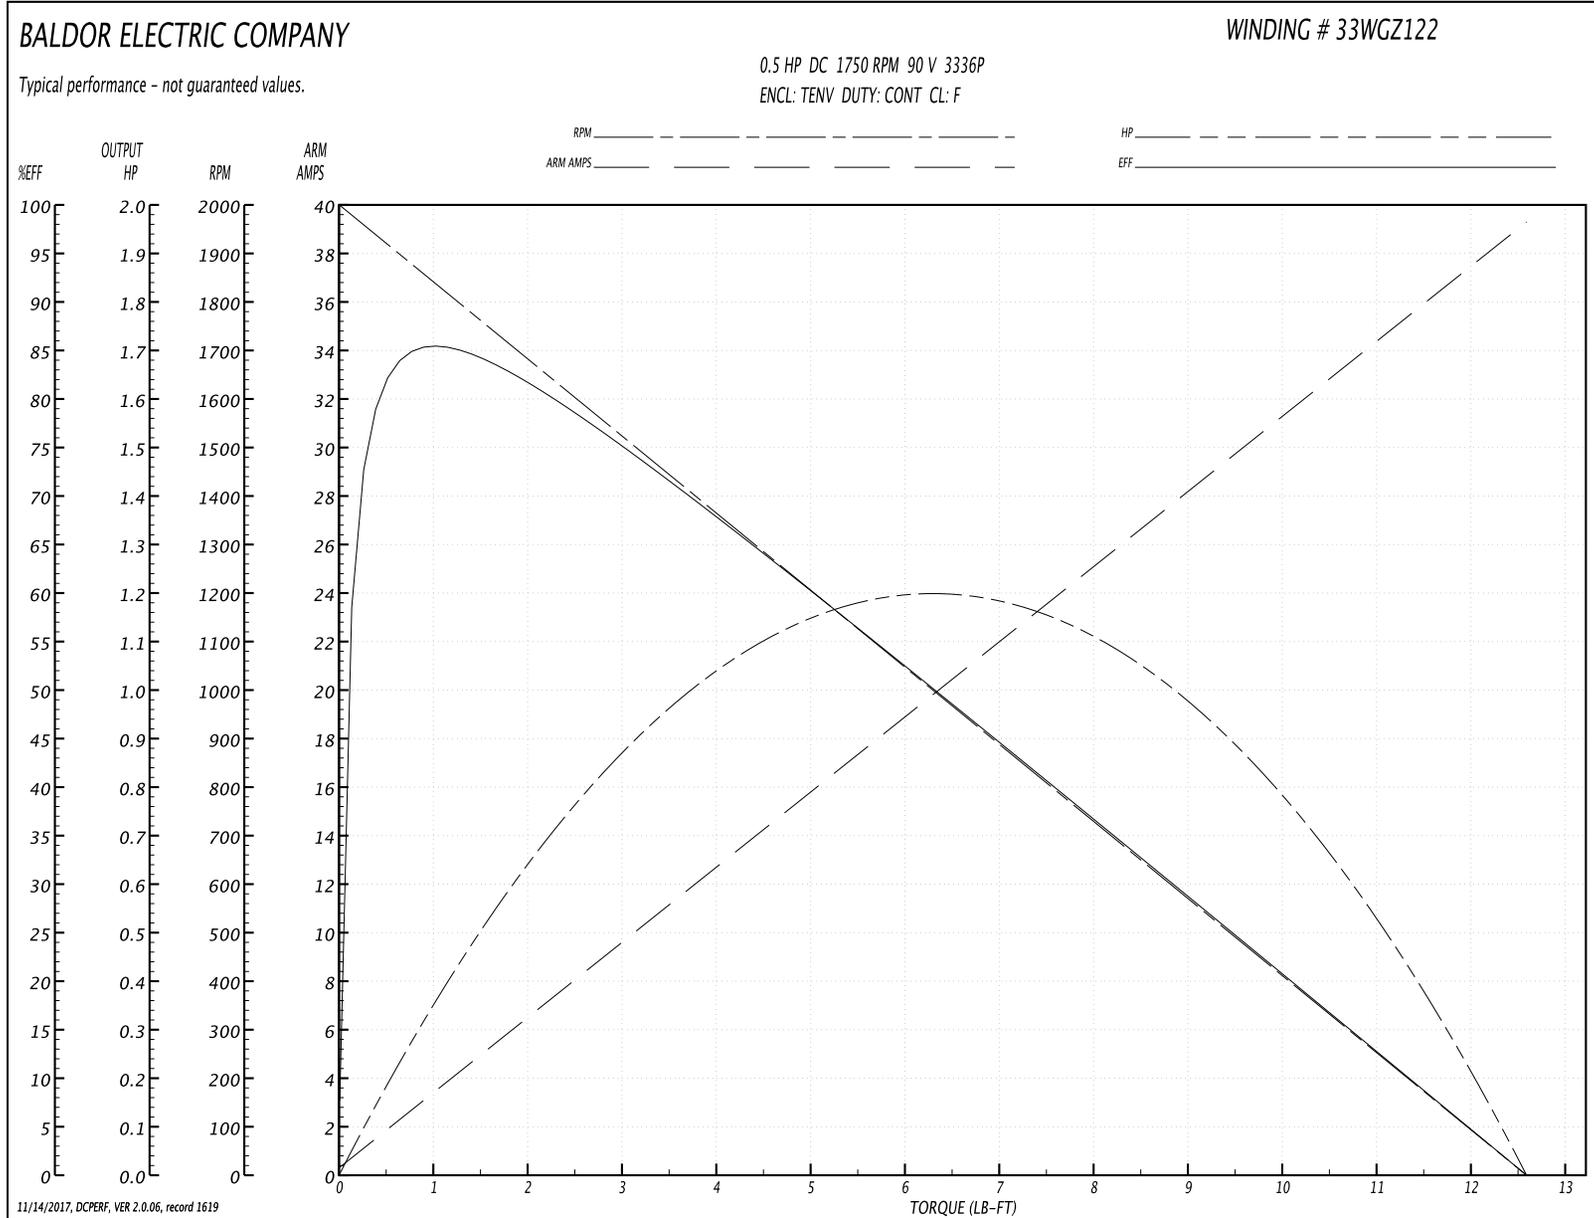

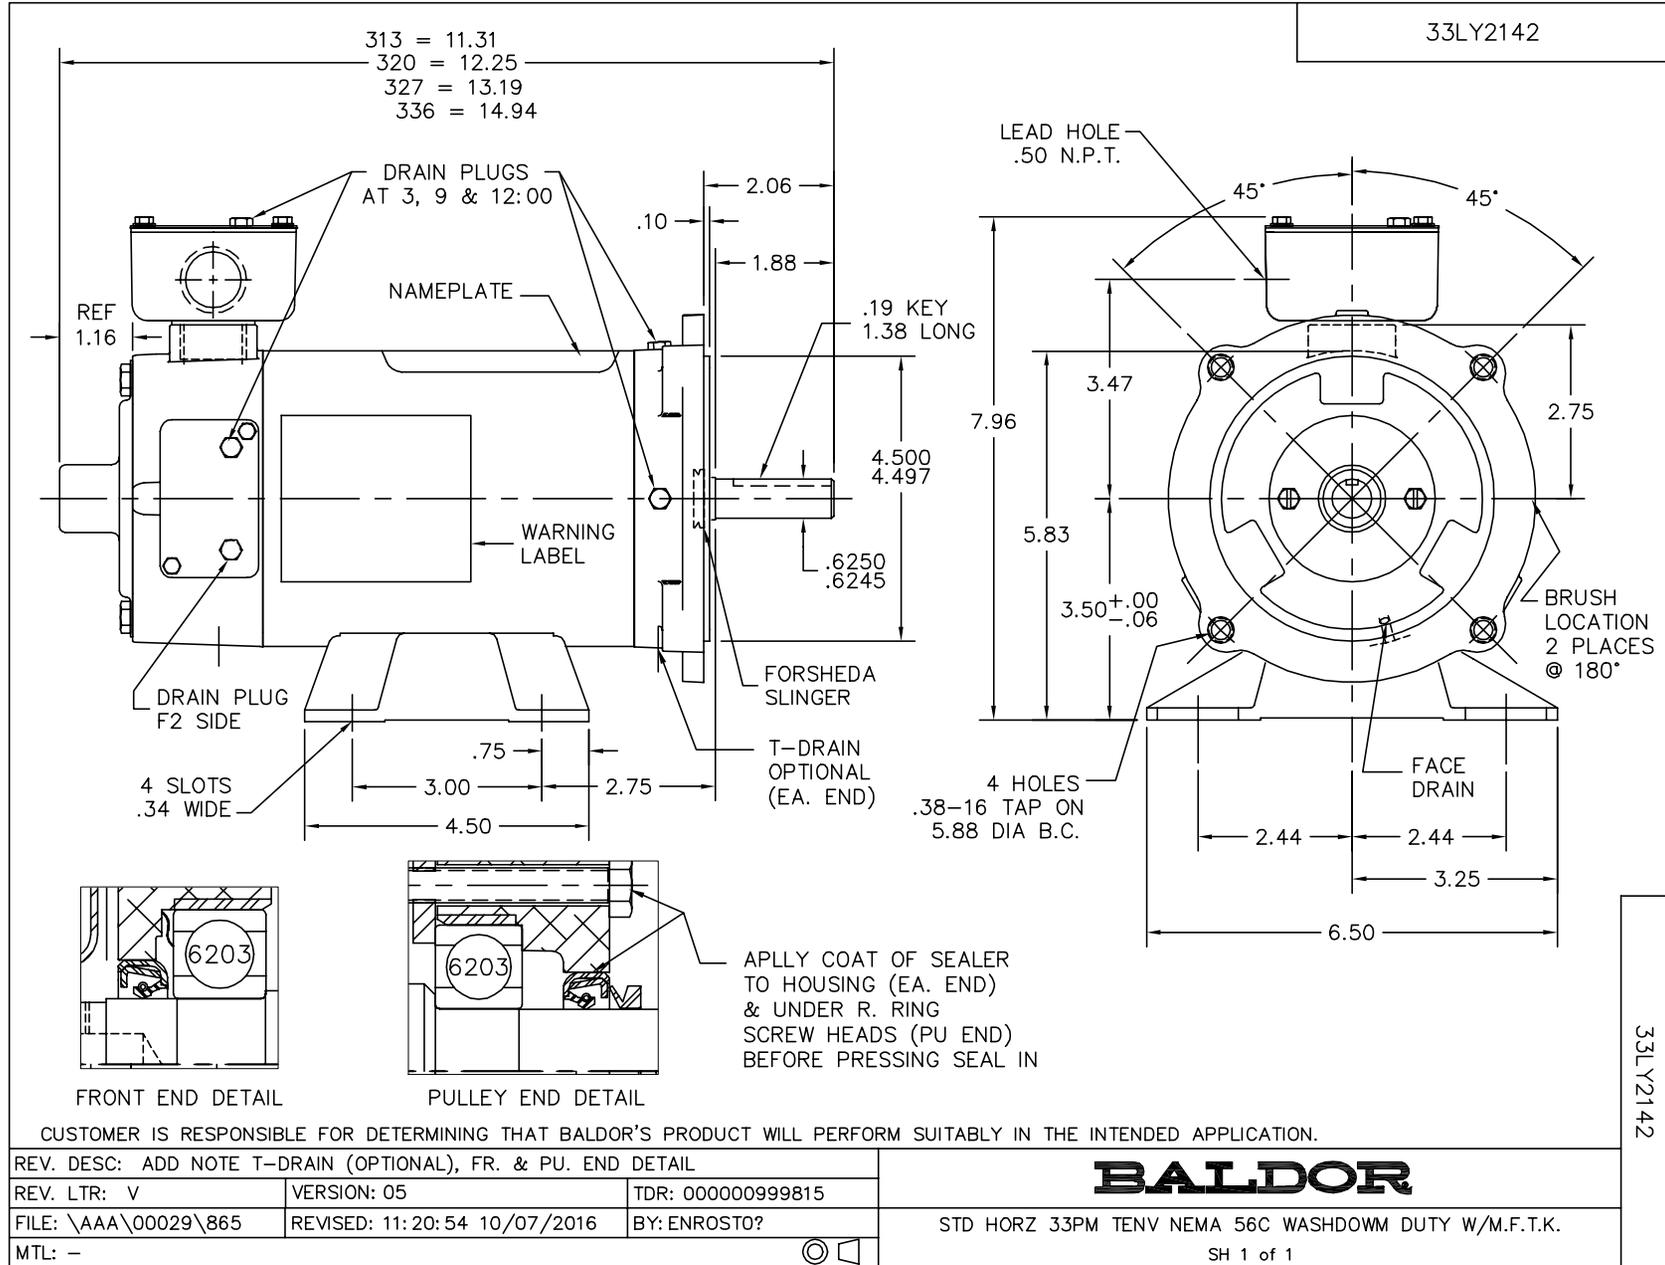

CD0194

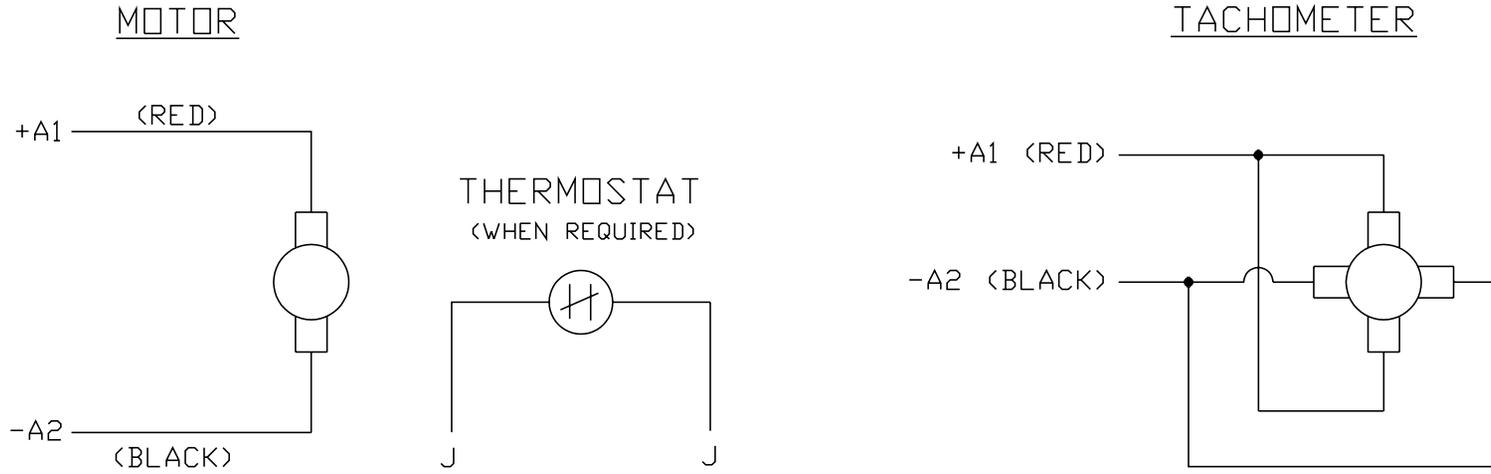

NOTES:

1. CCW ROTATION AS SHOWN FACING COMMUTATOR END. TO REVERSE MOTOR ROTATION OR TACHOMETER OUTPUT POLARITY INTERCHANGE LEADS A1(RED) & A2(BLACK)
2. LEAD COLORS FOR REFERENCE ONLY & NOT SPECIFIED BY THIS DRAWING. LEAD COLORS SPECIFIED BY LAYOUT DRAWING & BILL OF MATERIAL ONLY.

MATL: -			
REV: E	ADDED NOTE "LEAD COLORS FOR REFERENCE ONLY &..."		
CD0194	SCALE: -	BY: CK	REVISED: 07/28/95
	FILE: AAA00004503		TDR: 0078737

BALDOR ELECTRIC Co.

CD TYPE P DC PERMANENT MAGNET MOTORS AND TACHOMETERS

CD0194