

Project:

Type:

Prepared By:

Date:



UPC: 019813749129



### Features and Benefits

Replacement for traditional Metal Halide or High Pressure Sodium HID Lamps

Active Cooling: Internal sensor overheats and engaged will automatically reduce output to 70% rated wattage until the sensor cools and will light up again to 100%

Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast

Rated for use in enclosed and open fixtures in dry or damp locations

4kV surge protection built in

50,000 hour Lifespan

Environmentally friendly, no mercury used

UL Listed, UL Classified, DLC Listed

Non-Dimmable

5 Year No Compromise Warranty

## Technical Specifications

### Performance

#### Product Type:

HID

#### Input Wattage:

36W

#### Typical Lumen Output:

5400

#### Efficacy:

150 lm/W

#### Color Temperature:

5000K Daylight

#### CRI:

80

### L70 Lifespan:

50,000 Hours

### Dimmable:

No

### Construction

#### Bulb Shape:

Post Top

#### Base Type:

EX39

#### Beam Angle:

360°

### Other

#### Equivalency:

150W HID

### Warranty (Years):

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

### Electrical

#### Power Factor:

0.9

#### Operating Temperature:

-30°C - 60°C

#### Input Voltage:

100-277V

## Technical Specifications (continued)

### Electrical

#### Operating Frequency:

50 / 60 Hz

### Installation

#### Installation Type:

Type B, Ballast Bypass

#### Installation Orientation:

Universal Installation

### Technical Specifications

#### For Use in Emergency Fixtures:

No

#### For Use Outdoors in Open Fixtures:

Yes

### Electrical Characteristics

#### Flicker:

<30%

#### THDi:

<20%

### Compliance

#### UL Listed:

Yes

#### UL Classified:

Yes

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.

#### DLC Model Number:

HID-36-EX39-850-BYP-PT

#### DLC Product Code:

PV8KKCIM

#### CEC Status:

Lawful for sale in California


## Minimum Compartment Size

Length x Width x Height [in]	Lamp Quantity
8.0 x 8.0 x 11.0	1


## Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	15.6	11.8	10.2
PALLET	432	37.4	33.1	35.4

## Wiring Diagram

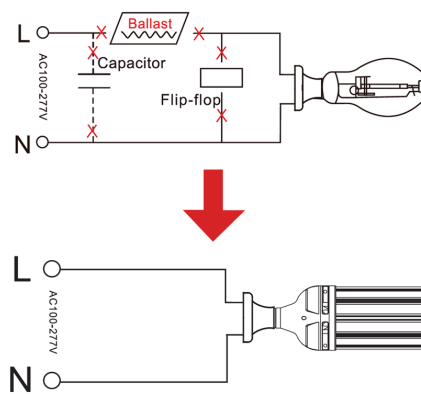

## Dimension

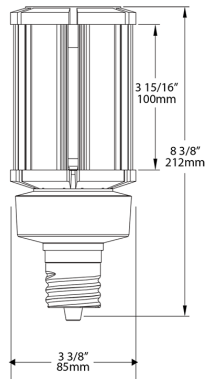

## Light Distribution

