




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
XUM2APCNM8

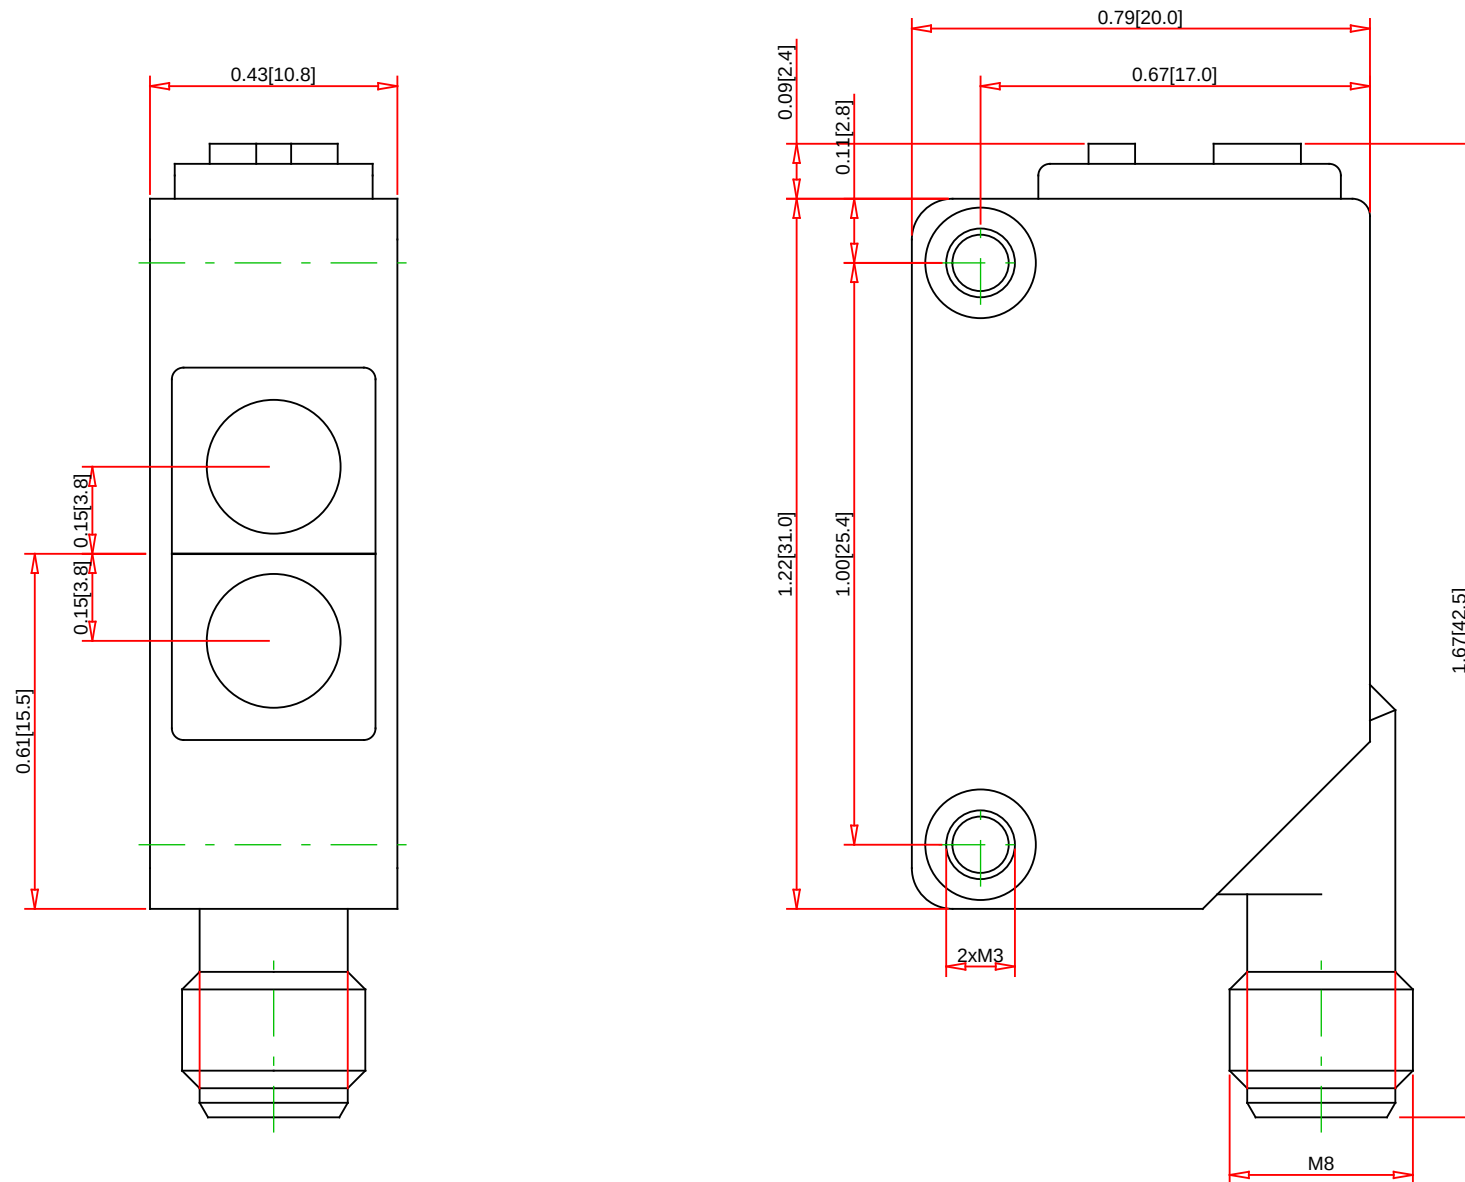

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Diffuse with Background Suppression:
Diffuse:
Polarized Retroreflective:
Thru Beam: 15000.0 mm (590.6 in)
Retroreflective:
Circuit Type: PNP
Output Mode: NO/NC Configuration Switch
Power: DC
Voltage Range: 12-24 VDC
Max Load: 100 mA
Max Switching Frequency : 1000 Hz
Temp Range: -30° to 60° C (-22° to 140° F)
NEMA Type: NEMA 4X (indoor use only)
IP Rating: IP65, IP67
Standards: CE, CULus, Ctick

Specification:

Sensor Type: Thru-Beam Receiver
Description: Photoelectric, Thru-Beam Receiver, Miniature Block Style, 12-24 VDC
Body Style: Miniature Block Style
Diameter:
Housing Material: Plastic - PBT
Face Material: PMMA
Adjustment: Yes
Cable Size:
Connector Type: M8
Special Features: