

BALDOR® • ***RELIANCE***

Product Information Packet

UCM713

7.5-10HP,3450RPM,3PH,60HZ,184TZ,3646M

Part Detail							
Revision:	AK	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Elec. Spec:	36WG0738	CD Diagram:	CD0005	Mfg Plant:	
Mech. Spec:	36F551	Layout:	36LYF551	Poles:	02	Created Date:	
Base:	RG	Eff. Date:	01-19-2017	Leads:	9#14 30" LG		Y

Specs			
Catalog Number:	UCM713	Insulation Class:	F
Enclosure:	OPEN	Inverter Code:	Not Inverter
Frame:	184TZ	KVA Code:	J
Frame Material:	Steel	Lifting Lugs:	Standard Lifting Lugs
Output @ Frequency:	10.000 HP @ 60 HZ	Locked Bearing Indicator:	Locked Bearing
Synchronous Speed @ Frequency:	3600 RPM @ 60 HZ	Motor Lead Quantity/Wire Size:	9 @ 14 AWG
Voltage @ Frequency:	208.0 V @ 60 HZ	Motor Lead Exit:	Pipe Or Pipe Adaptor
	230.0 V @ 60 HZ	Motor Lead Termination:	Flying Leads
	460.0 V @ 60 HZ	Motor Type:	3646M
XP Class and Group:	None	Mounting Arrangement:	F1
XP Division:	Not Applicable	Power Factor:	92
Agency Approvals:	UR	Product Family:	General Purpose
	CSA	Product Type:	FARM DUTY
Auxillary Box:	No Auxillary Box	Pulley End Bearing Type:	Ball
Auxillary Box Lead Termination:	None	Pulley Face Code:	Standard
Base Indicator:	Rigid	Pulley Shaft Indicator:	Tapped & Key
Bearing Grease Type:	Polyrex EM (-20F +300F)	Rodent Screen:	None
Blower:	None	Shaft Extension Location:	Pulley End

Current @ Voltage:	12.000 A @ 460.0 V	Shaft Ground Indicator:	No Shaft Grounding
	24.000 A @ 230.0 V	Shaft Rotation:	Reversible
	25.000 A @ 208.0 V	Shaft Slinger Indicator:	No Slinger
Design Code:	B	Speed Code:	Single Speed
Drip Cover:	No Drip Cover	Motor Standards:	NEMA
Duty Rating:	CONT	Starting Method:	Direct on line
Electrically Isolated Bearing:	Not Electrically Isolated	Thermal Device - Bearing:	None
Feedback Device:	NO FEEDBACK	Thermal Device - Winding:	Normally Closed Thermostat
Front Face Code:	Standard	Vibration Sensor Indicator:	No Vibration Sensor
Front Shaft Indicator:	None	Winding Thermal 1:	None
Heater Indicator:	No Heater	Winding Thermal 2:	None

Nameplate NP1279L										
CAT.NO.	UCM713									
SPEC.	36F551-738									
HP	7.5-10 AIR OVER									
VOLTS	208-230/460									
AMP	25-24/12									
RPM	3450									
FRAME	184TZ									
				HZ	60			PH	3	
SER.F.	1.00			CODE	J		DES	B	CL	F
NEMA-NOM-EFF	84			PF	92					
RATING	40C AMB-CONT									
CC							USABLE AT 208V	25		
DE	6206			ODE	6205					
ENCL	OPEN			SN						

Nameplate NP1263L	
CAT.NO.	UCM713
SPEC.	36F551-738
HP	7.5-10 AIR OVER
VOLTS	208-230/460
AMP	25-24/12
RPM	3450
FRAME	184TZ
	HZ 60
	PH 3
SER.F.	1.00
	CODE J
	DES B
	CL F
NEMA-NOM-EFF	84
	PF 92
RATING	40C AMB-CONT
CC	USABLE AT 208V 25
DE	6206
	ODE 6205
ENCL	OPEN
	SN

AC Induction Motor Performance Data

Record # 61460 - Typical performance - not guaranteed values


Winding: 36WG0738-R004	Type: 3646M	Enclosure: OPAO
-------------------------------	--------------------	------------------------


Nameplate Data				460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	10 AIR OVER			Full Load Torque	15 LB-FT
Volts	208-230/460			Start Configuration	direct on line
Full Load Amps	25-24/12			Breakdown Torque	58 LB-FT
R.P.M.	3450			Pull-up Torque	50 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	56 LB-FT
NEMA Design Code	B	KVA Code	J	Starting Current	100 A
Service Factor (S.F.)	1			No-load Current	3 A
NEMA Nom. Eff.	84	Power Factor	92	Line-line Res. @ 25°C	1.41 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	
				Locked-rotor Power Factor	48.2
				Rotor inertia	0.207 LB-FT ²

Load Characteristics 460 V, 60 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	67	86	92	94	93	93
Efficiency	75.7	86.3	84	82.8	82.5	79.8
Speed	3567	3541	3511	3475	3440	3398
Line amperes	4.7	6.4	9.1	12	15	18.3

Performance Graph at 460V, 60Hz, 10.0HP Typical performance - Not guaranteed values

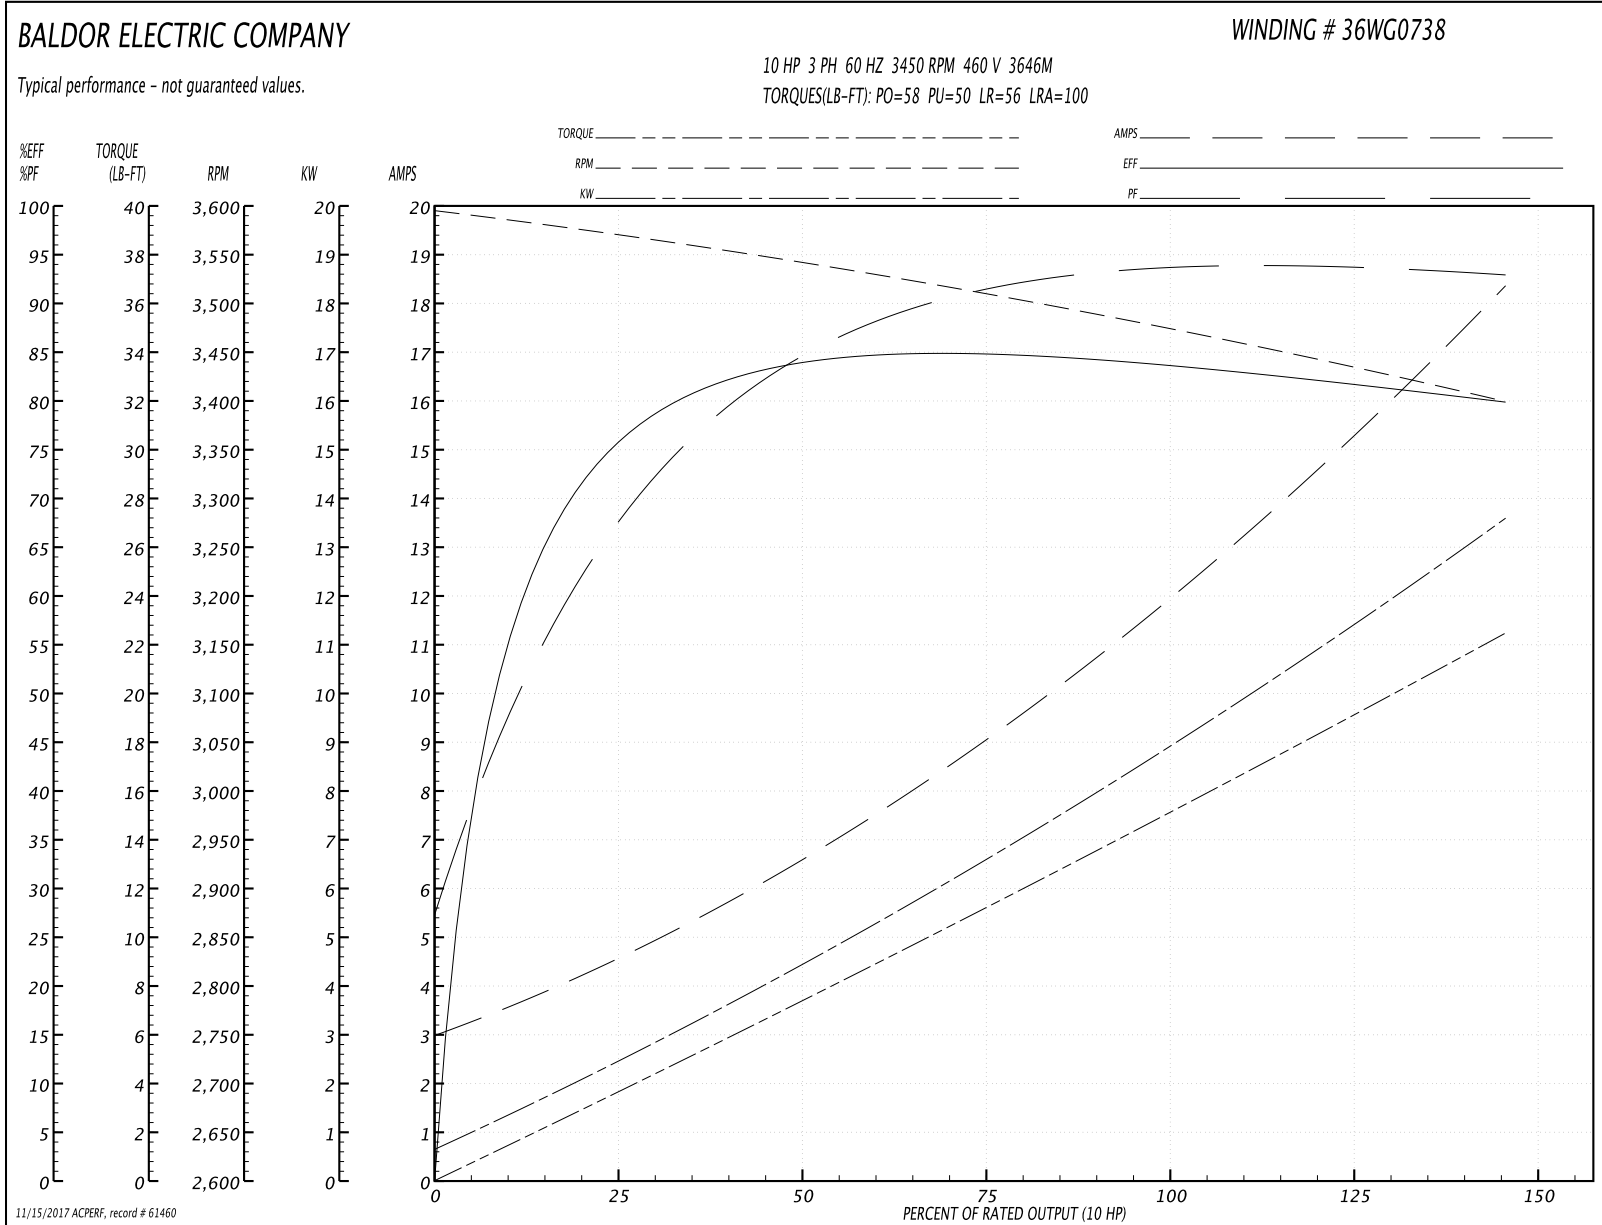

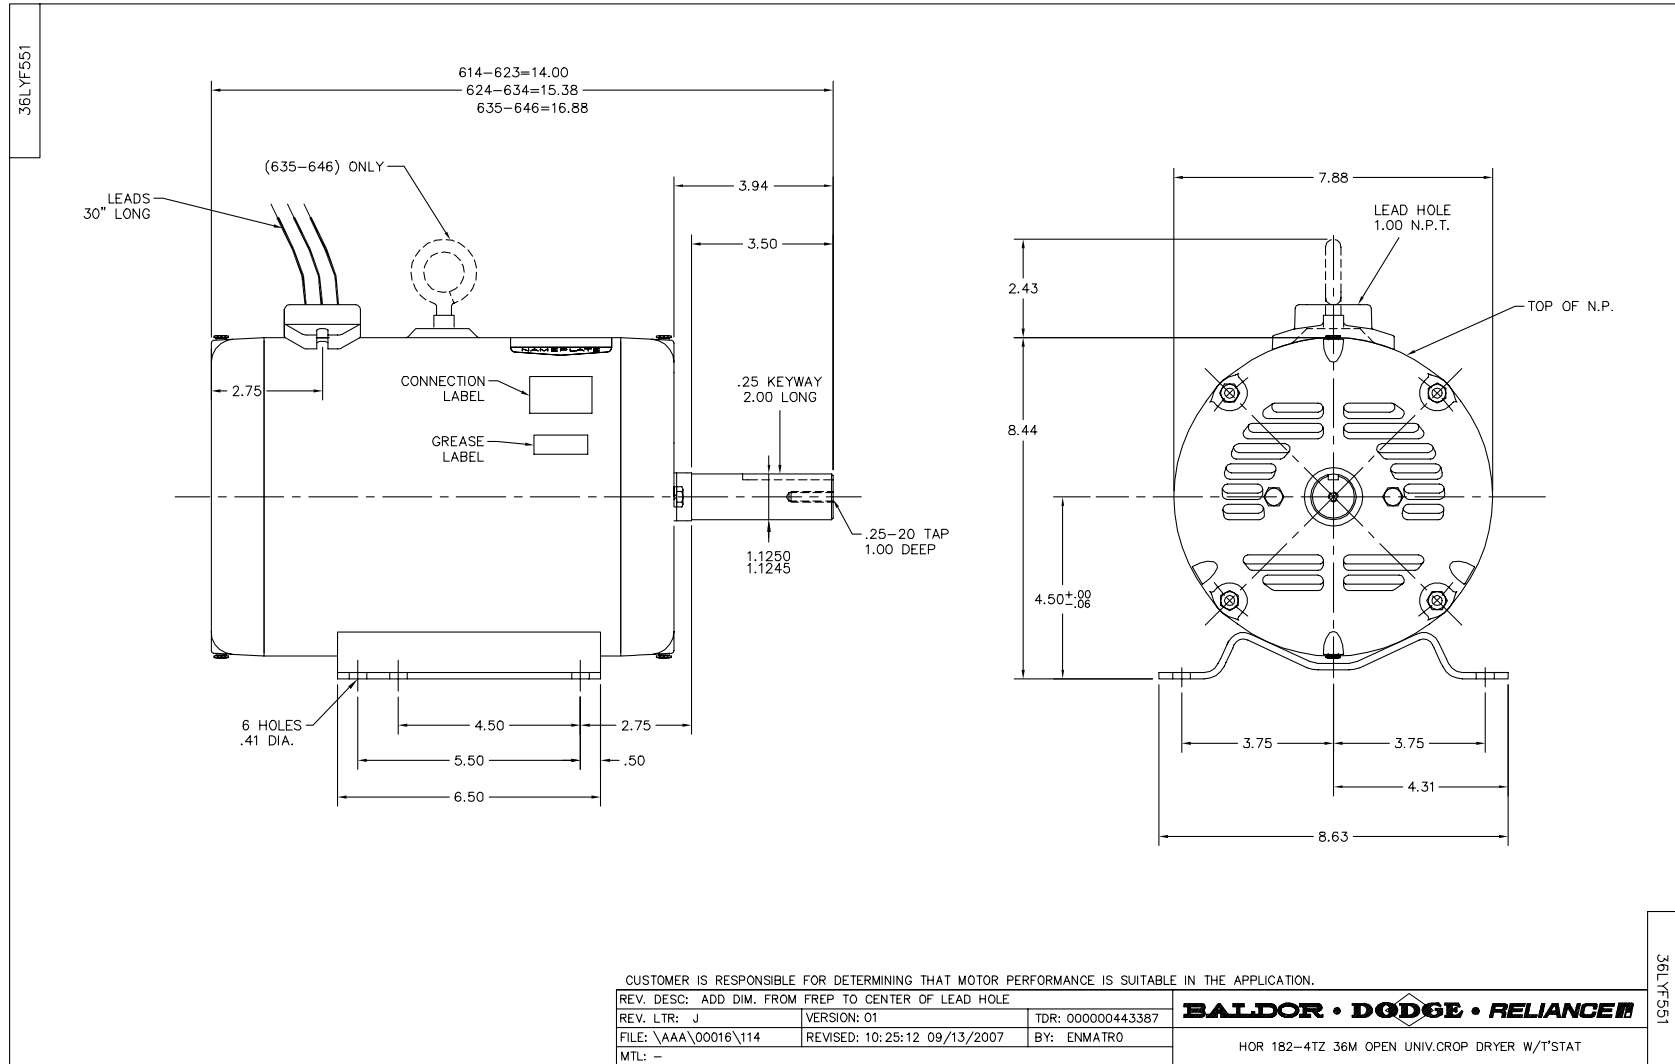

CD0005



LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900003		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005