

BALDOR® • RELIANCE

Product Information Packet

EM3615T

5HP,1750RPM,3PH,60HZ,184T,3642M,TEFC,F1

Part Detail									
Revision:	A	Status:	PRD/A	Change #:		Proprietary:	No		
Type:	AC	Prod. Type:	3642M	Elec. Spec:	36WGS268	CD Diagram:			
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	36G271	Layout:			
Frame:	184T	Mounting:	F1	Poles:	04	Created Date:	03-25-2010		
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	08-04-2010		
Leads:	9#16	Literature:		Elec. Diagram:		Replaced By:			
Nameplate NP1259L									
CAT.NO.	EM3615T								
SPEC.	36G271S268G1								
HP	5								
VOLTS	208-230/460								
AMP	13.9-13.4/6.7								
RPM	1750								
FRAME	184T	HZ			60	PH	3		
SER.F.	1.15	CODE			J	DES	B	CL	F
NEMA-NOM-EFF	89.5	PF			78				
RATING	40C AMB-CONT								
CC	010A	USABLE AT 208V			13.9				
DE	6206	ODE			6205				
ENCL	TEFC	SN							

Parts List		
Part Number	Description	Quantity
SA192659	SA 36G271S268G1	1.000 EA
RA180293	RA 36G271S268G1	1.000 EA
36FN3000C01SP	EXFN, PLASTIC, 5.25 OD, .912 ID	1.000 EA
S/P107-000-001	SUPER E PROC'S-FS & WS PLTS-POLYREX EM G	1.000 EA
36CB3004	36 CB CASTING W/1.09 DIA LEAD HOLE @ 6:0	1.000 EA
36GS1000SP	GASKET-CONDUIT BOX, .06 THICK #SV-330 LE	1.000 EA
51XB1016A08	10-16X 1/2HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
36EP3104A01	FREP MACH W/GRSR, RAISED FH PADS	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 EA
36EP3100A01SP	PU ENDPLATE, MACH	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
XY2520A12	1/4-20 HEX NUT, DIRECTIONAL SERRATIONS	4.000 EA
36FH4009A102SP	IEC FH GREASER W/AUTOPHERETIC PRIMER	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
36CB4516	36 LIPPED CB LID	1.000 EA
37GS1001SP	GASKET, CONDUIT BOX LID, .06 THICK LEXID	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501E16	KEY, 1/4 SQ X 1.750	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
HW3200A01	3/8-16X3/4 I-BLT WELDED F/S	1.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB

Parts List (continued)		
Part Number	Description	Quantity
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 EA
MG1000Y03	WILKO 689.710 GOLD PAINT SUPER E	0.022 GA
LB1115	LABEL,LIFTING DEVICE	1.000 EA
HA3101A28	THRUBOLT 1/4-20 X 12.500 OHIO ROD	4.000 EA
LC0005E01	CONN.DIA./WARNING LABEL (LC0005/LB1119)	1.000 EA
LB1125C02	SUPER-E (STOCK CTN LABEL SUPER-E WITH FL	1.000 EA
LB1357	ENERGY GUIDE LABEL (BOX LABEL)	1.000 SH
NP1259L	SUPER E, ALUM, UL CSA CC, W/O THERMAL,	1.000 EA
36PA1001	PACKAGING GROUP	1.000 EA

Accessories		
Part Number	Description	Multiplier
36-3301	C FACE KIT	A8
36EP1304A62SP	FLANGE MTD ENDPLATE 182-4TD -ENCL (LESS	A8


Performance Data at 460V, 60Hz, 5.0HP (Typical performance - Not guaranteed values)
General Characteristics

Full Load Torque:	14.9 LB-FT	Start Configuration:	DOL
No-Load Current:	3.24 Amps	Break-Down Torque:	52.2 LB-FT
Line-line Res. @ 25°C.:	2.31 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	31.5 LB-FT
Temp. Rise @ Rated Load:	77 C	Locked-Rotor Torque:	34.9 LB-FT
Temp. Rise @ S.F. Load:	96 C	Starting Current:	49.1 Amps

Load Characteristics

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	39.0	60.0	72.0	78.0	83.0	83.0	81.0
Efficiency:	84.9	89.7	90.3	89.8	88.8	87.0	89.2
Speed:	1789.1	1776.2	1762.3	1749.7	1732.5	1714.3	1739.0
Line Amperes:	3.55	4.31	5.43	6.65	7.94	9.64	7.42

Performance Graph at 460V, 60Hz, 5.0HP Typical performance - Not guaranteed values

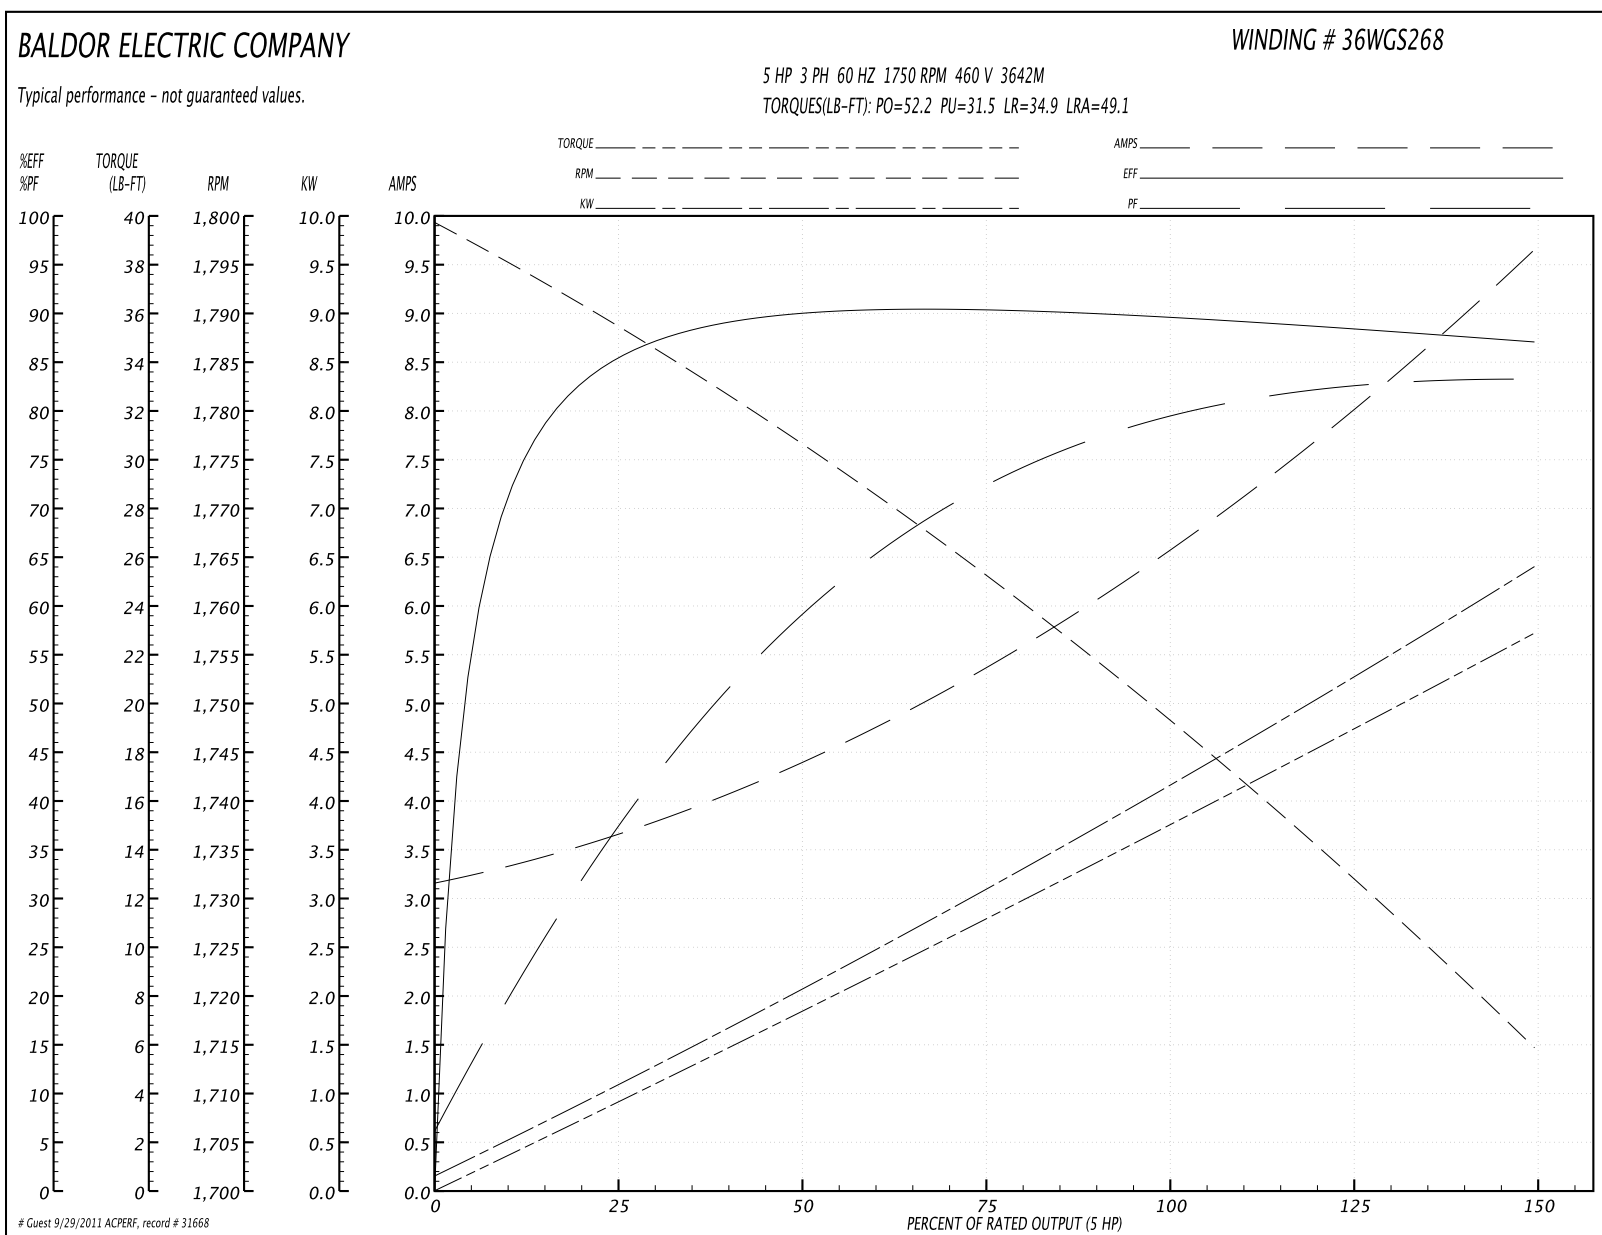


Performance Data at 230V, 60Hz, 5.0HP (Typical performance - Not guaranteed values)**General Characteristics**

Full Load Torque:	14.9 LB-FT	Start Configuration:	DOL
No-Load Current:	6.48 Amps	Break-Down Torque:	52.2 LB-FT
Line-line Res. @ 25°C.:	0.567 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	31.5 LB-FT
Temp. Rise @ Rated Load:	77 C	Locked-Rotor Torque:	34.9 LB-FT
Temp. Rise @ S.F. Load:	93 C	Starting Current:	98.2 Amps

Load Characteristics

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	39.0	60.0	71.0	78.0	83.0	83.0	81.0
Efficiency:	84.9	89.7	90.6	89.6	88.6	87.0	89.0
Speed:	1789.0	1776.0	1762.0	1750.0	1733.0	1714.0	1740.0
Line Amperes:	7.1	8.62	10.9	13.3	15.9	19.3	14.9

Performance Graph at 230V, 60Hz, 5.0HP Typical performance - Not guaranteed values

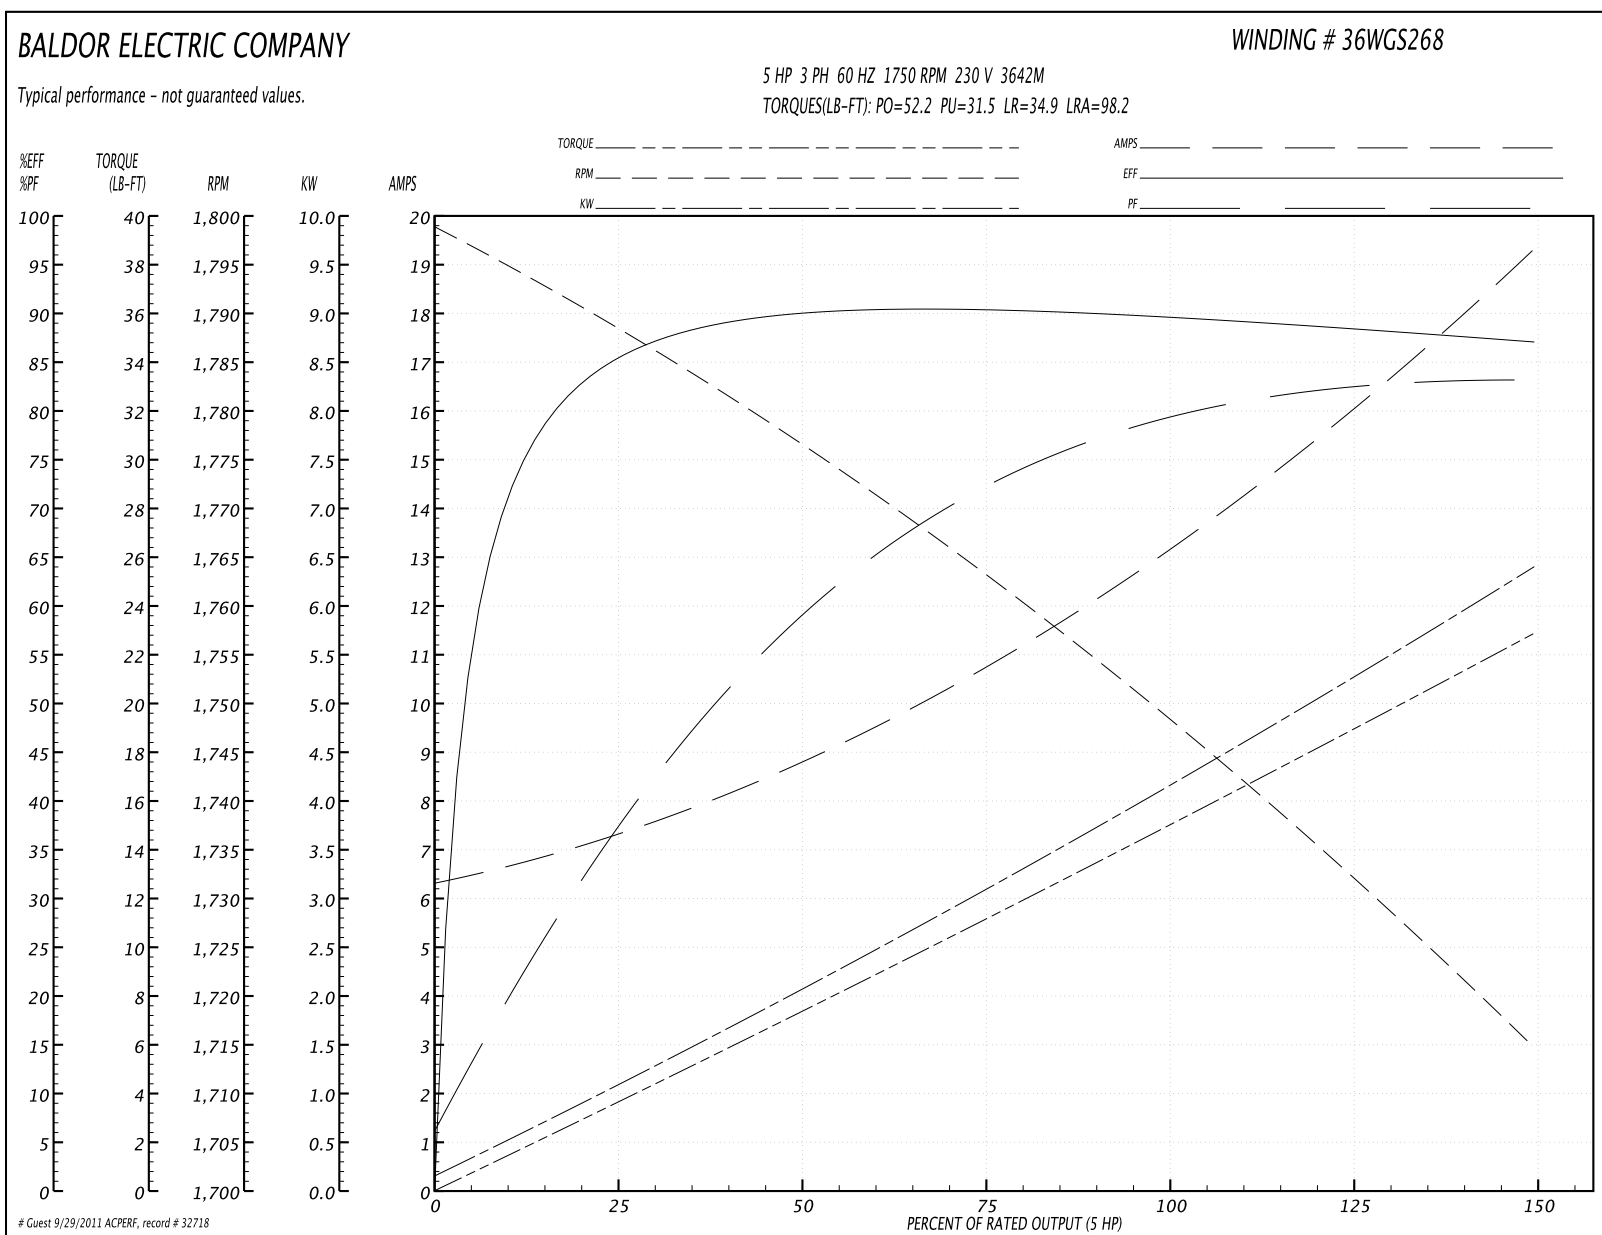

Performance Data at 208V, 60Hz, 5.0HP (Typical performance - Not guaranteed values)**General Characteristics**

Full Load Torque:	15.0 LB-FT	Start Configuration:	DOL
No-Load Current:	5.36 Amps	Break-Down Torque:	42.0 LB-FT
Line-line Res. @ 25°C.:	0.5675 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	24.8 LB-FT
Temp. Rise @ Rated Load:	80 C	Locked-Rotor Torque:	27.5 LB-FT
Temp. Rise @ S.F. Load:	101 C	Starting Current:	87.0 Amps

Load Characteristics

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	48.0	70.0	79.0	83.0	86.0	85.0	85.0
Efficiency:	87.1	90.5	90.4	89.4	87.5	85.5	88.3
Speed:	1787.0	1772.0	1756.0	1741.0	1720.0	1698.0	1728.0
Line Amperes:	6.2	8.16	10.92	13.92	17.1	21.2	15.8

Performance Graph at 208V, 60Hz, 5.0HP Typical performance - Not guaranteed values

