

# **BALDOR® • RELIANCE**

## **Product Information Packet**

# **VM3615T**

**5HP, 1745RPM, 3PH, 60HZ, 184TC, 3634M, TEFC, F1**

Part Detail							
Revision:	E	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3634M	Elec. Spec:	36WGS543	CD Diagram:	CD0005
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	36A003	Layout:	36LYA003
Frame:	184TC	Mounting:	F1	Poles:	04	Created Date:	08-30-2010
Base:	N	Rotation:	R	Insulation:	F	Eff. Date:	04-02-2015
Leads:	9#16					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP1256L							
CAT.NO.	VM3615T						
SPEC.	36A003S543H1						
HP	5						
VOLTS	208-230/460						
AMP	14.2-13.6/6.8						
RPM	1745						
FRAME	184TC	HZ	60	PH	3		
SER.F.	1.15	CODE	J	DES	A	CLASS	F
NEMA-NOM-EFF	87.5	PF	78				
RATING	40C AMB-CONT						
CC	010A	USABLE AT 208V					
DE	6206	ODE	6205				
ENCL	TEFC	SN					

**AC Induction Motor Performance Data**

Record # 32154 - Typical performance - not guaranteed values


<b>Winding:</b> 36WGS543-R001	<b>Type:</b> 3634M	<b>Enclosure:</b> TEFC
-------------------------------	--------------------	------------------------


Nameplate Data				460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	5			Full Load Torque	15 LB-FT
Volts	208-230/460			Start Configuration	direct on line
Full Load Amps	14.2-13.6/6.8			Breakdown Torque	53.2 LB-FT
R.P.M.	1745			Pull-up Torque	29.2 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	34.7 LB-FT
NEMA Design Code	A	KVA Code	J	Starting Current	48.4 A
Service Factor (S.F.)	1.15			No-load Current	3.42 A
NEMA Nom. Eff.	87.5	Power Factor	78	Line-line Res. @ 25°C	2.6196 Ω
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	78°C
S.F. Amps				Temp. Rise @ S.F. Load	96°C
				Rotor inertia	0.317 LB-FT <sup>2</sup>

Load Characteristics 460 V, 60 Hz, 5 HP


% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	38	59	72	78	82	83	80
Efficiency	80.9	87.1	88.3	87.8	86.6	84.7	87.1
Speed	1788.2	1775.7	1761.9	1747.1	1729.5	1710.5	1737
Line amperes	3.77	4.5	5.5	6.83	8.24	9.97	7.68

Performance Graph at 460V, 60Hz, 5.0HP Typical performance - Not guaranteed values

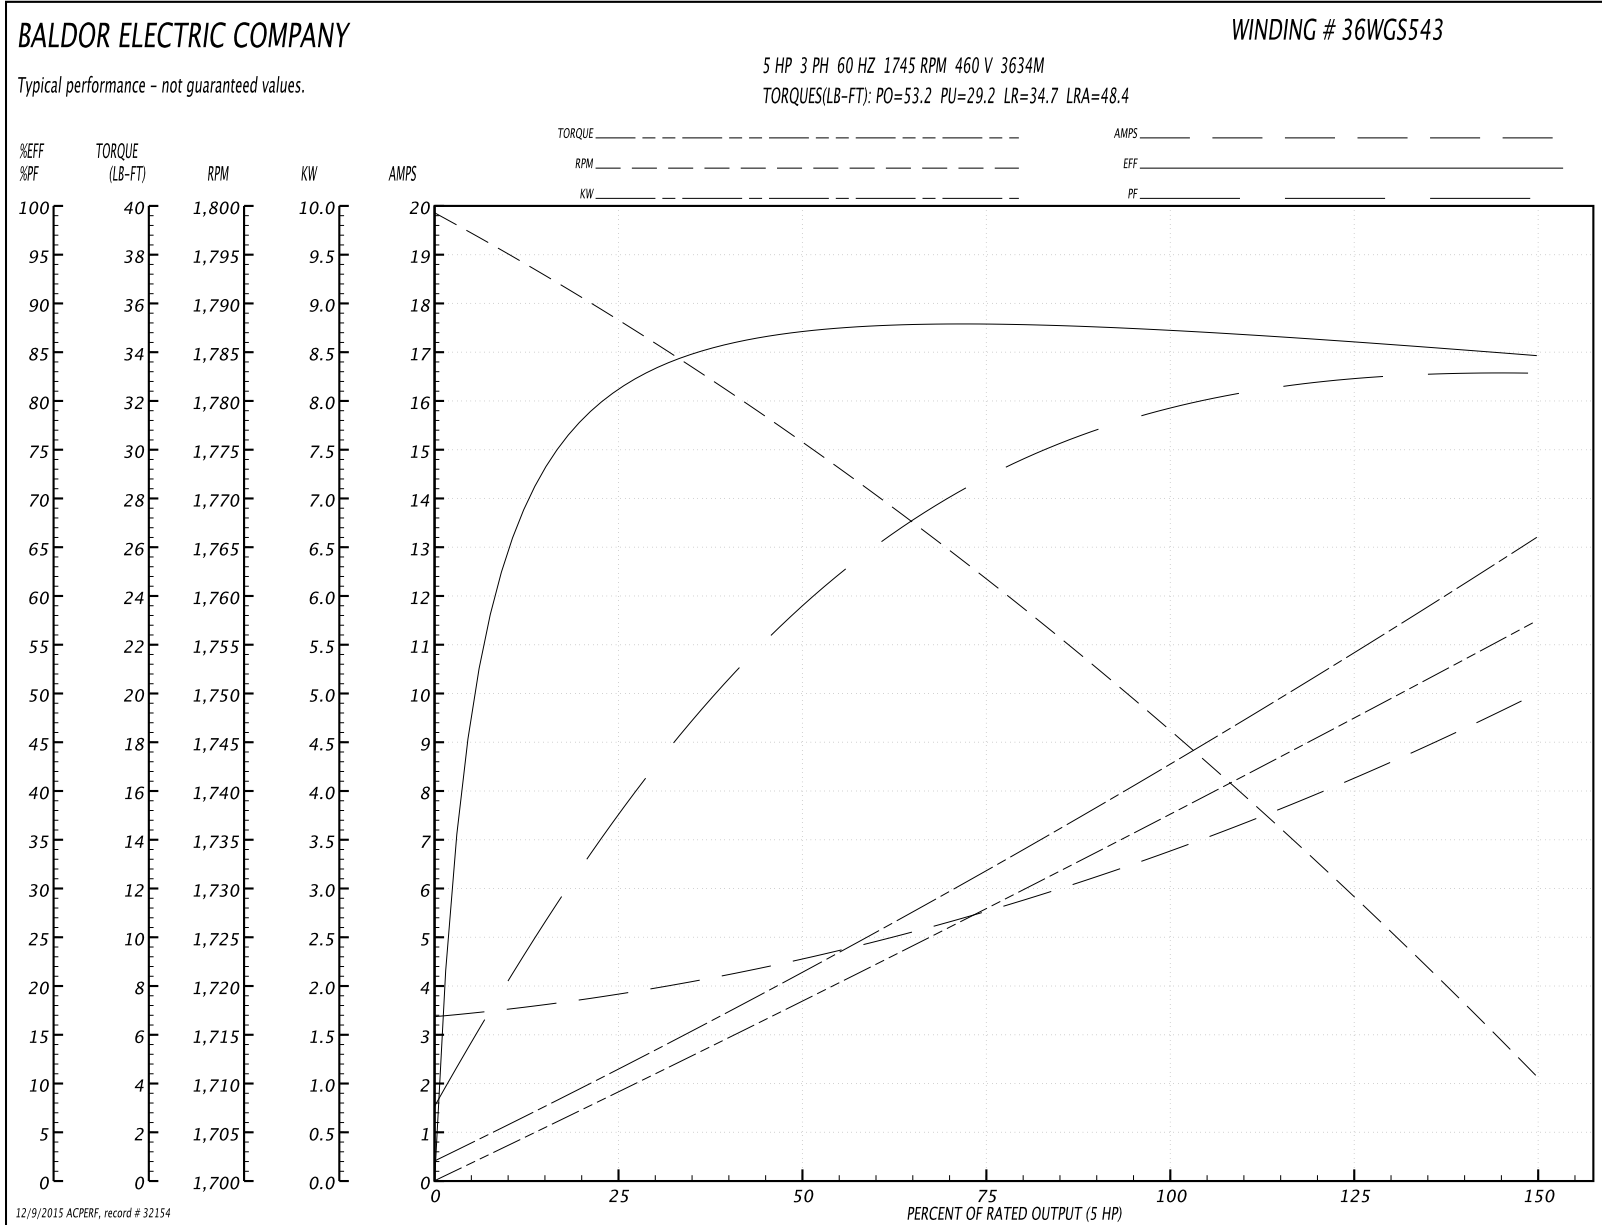


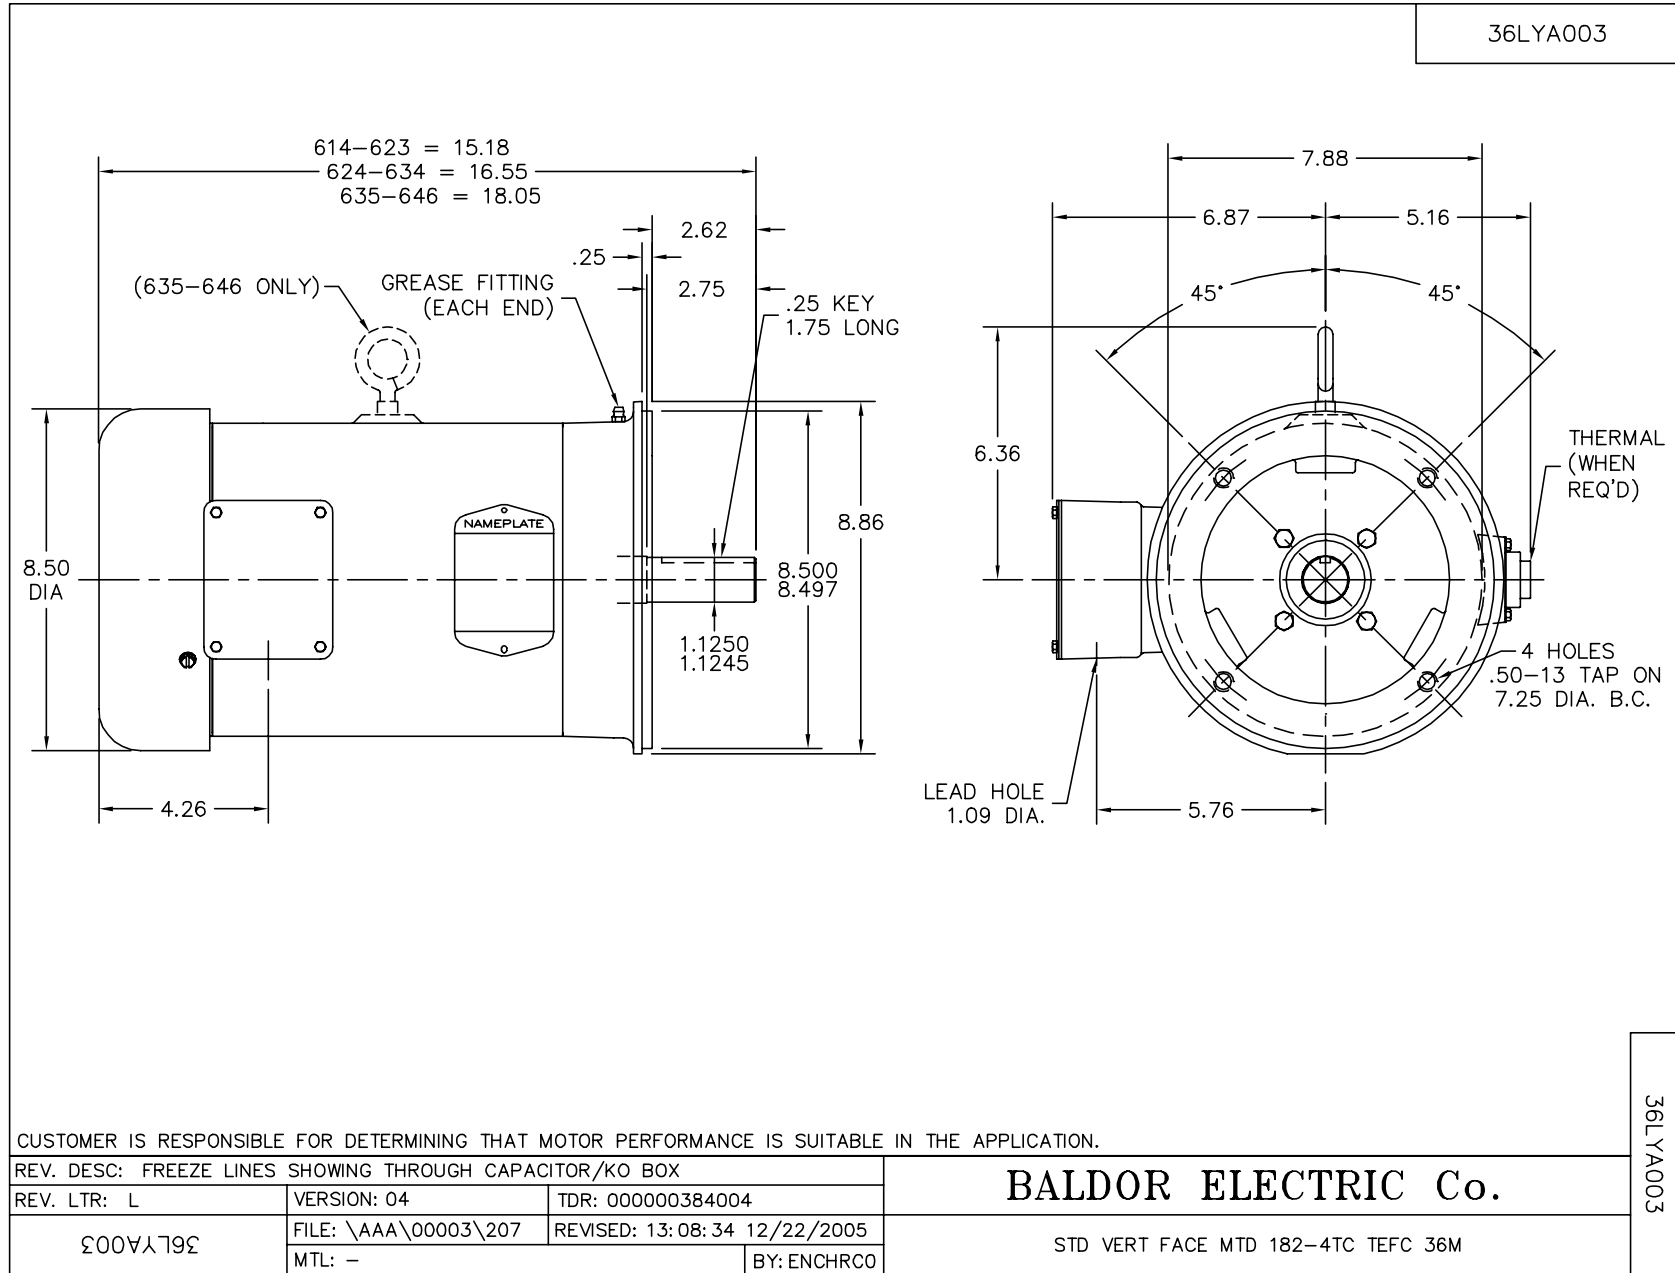

CD0005

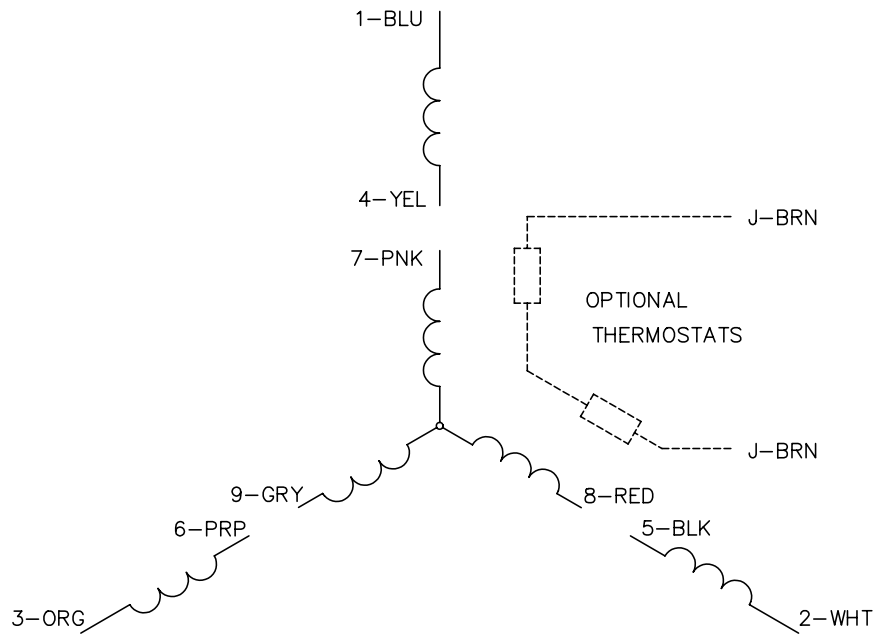


LOW VOLTAGE  
(2Y)

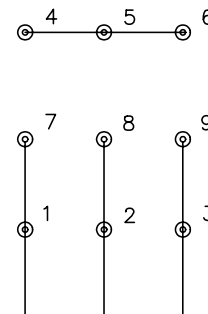

LINE

HIGH VOLTAGE  
(1Y)

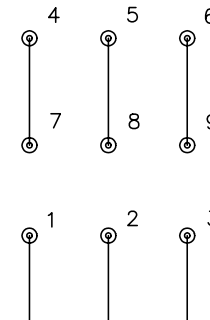

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
90000		FILE: AAA00005140	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

3PH, DV, 9 LEADS

CD0005