Light Efficient Design

Light Efficient Design

SCREW-IN RETROFITS + PIN-BASE RETROFITS + WORK LIGHTS

RemPhos

RETROFIT KITS + FIXTURES

Solera

SOLAR LIGHTS

LumiCleanse

DISINFECTION LIGHTS

led-llc.com

2020 Q4 EDITION

Join us...

pro workshop webinar

Stay up to date with our latest product offerings, company and industry news!

Contact Rebecca Healy for details **rhealy@led-llc.com**

Table of Contents

Introduction to Light Efficient Design.....2-3
Accessories.....2

Screw-In Retrofits

Shoe Box / Wall Pack.....4-5
High Bay.....6-7
Low Bay.....8
Recessed Can.....9
Post Top.....10-11
Bollard.....12-13
SOX.....14
Hazardous Location.....15

Pin-Base Retrofits

PL.....16-17
T8.....18-19

Retrofit Kits.....20-23

LED Fixtures.....24-27

LumiCleanse.....28

Work Lights.....29

Solar Lights.....30-31

Light Efficient Design Representatives.....32

ACCESSORIES SPECIFICATIONS

DESCRIPTION	MODEL #	TYPE	ENCLOSURE	NOMINAL DISCHARGE CURRENT	STRIKE RATING	DIMENSIONS
SURGE ARRESTORS	SPD-277P-10KA-EC-1	10kA surge arrestor, **120-277V**, series with thermal fuse, 5 year limited manufacturer's warranty	Round IP65	10,000A	1@10kA 2@6.5kA 15@3kA 110@1.5kA	2.5" x 1.4"
	SPD-347P-10KA	10kA surge arrestor, **120-347V**, series with thermal fuse, 5 year limited manufacturer's warranty	Round IP67			

DESCRIPTION	MODEL #	TYPE	MAX WATTAGE	INPUT/OUTPUT VOLTAGE	THD	POWER FACTOR	DIMENSIONS
STEP DOWN TRANSFORMERS	MTM04506224C-LW	450VA Stepdown transformer	400W	480/347V in 277V out	3.4% 3.8%	0.99	4.2" x 2.7" x 2.2"
	MTM01606224C-LW	160VA Stepdown transformer	140W	480/347V in 277V out	4.3% 4.1%	0.99	4.2" x 2.0" x 1.6"
	MTM00506224C-LW	50VA Stepdown transformer	45W	480/347V in 240V out	6.2% 6.7%	0.98 0.97	3.0" x 1.7" x 1.4"

Sample Program

Try our LED retrofits in your project with no risk. Sample quantities* are available with 60-day terms, and can be returned in original cartons within 60 days. No restocking fee, no questions asked. That's our "try before rollout" guarantee!

* Up to 4 pieces

MARKETING MATERIALS... led-llc.com/marketing-material

COUNTER MAT / SELECTOR GUIDE

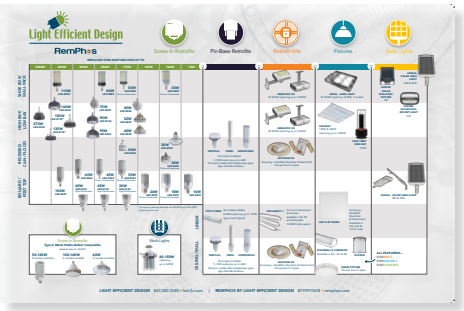

FLEXCOLOR BOLLARDS 2' X 4' BANNNER

NEW!

GONDOLAS

LED-9902
SCREW-IN
RETROFIT
2' GONDOLA
(24" x 14" x 78")

LED-9903
SCREW-IN
RETROFIT
3' GONDOLA
(36" x 14" x 78")

SOLERA SOLAR
2' GONDOLA
(24" x 14" x 78")

SHIPPER / PRODUCT DISPLAY

NEW!

LED-9345
FLEXCOLOR BOLLARDS
SHIPPER & POP PRODUCT DISPLAY
(15" X 15" X 60")

PRODUCT DISPLAYS

LED-9900
SMALL 2 LAMP DISPLAY
(6"x 10"x 16")

SL-9100
SOLERA SOLAR DISPLAY
(9"x 9"x 16")

RP-LBI-G1-1F-2X-DISPLAY
LBI DISPLAY
(10"x 9"x 22")

LED-9750
PL DISPLAY
(16"x 5"x 10")

NEW!

LED-9800
1 LAMP DISPLAY
(8"x 10"x 4")

LIGHT DISTRIBUTION / FOOT CANDLE COMPARISON

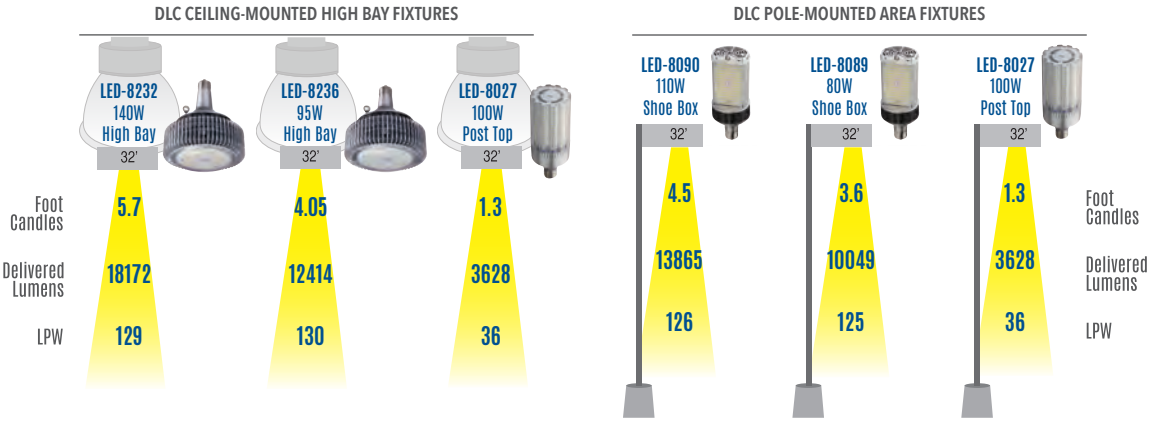

CHOOSE THE RIGHT SHAPE TO OPTIMIZE YOUR RETROFIT

SHOE BOX / WALL PACK

Ballast Bypass—*Internal Driver*

TYPE B

- *All models rotate easily once secured tightly in sockets*
- *Pinpoint directional light so no lumens are lost in the box*



All models have Type V optics unless otherwise noted

NEW!

20W
LED-8086E-G4
Replaces up to 70W
Edison base

30W
LED-8087E-G4
Replaces up to 100W
Edison or Mogul base

50W
LED-8088E-G4
Replaces up to 175W
Edison or Mogul base

NEW!

80W
LED-8089M-G5
Replaces up to 250W
Mogul base

110W
LED-8090M-G4
Replaces up to 400W
Mogul base

NEW!

110W
LED-8090M-G4-HV
Replaces up to 400W
Mogul base
High Voltage
277-480V

110W
LED-8090M-G4-T3
Replaces up to 400W
Mogul base
Type III optics

110W
LED-8090M-G4-T4
Replaces up to 400W
Mogul base
Type IV optics

110W
LED-8090M-G4-OCC
Replaces up to 400W
Mogul base
Motion sensor
Remote included

NEW!

320W
LED-8091M50
Replaces up to 1000W
Mogul base

NEW!

320W
LED-8091M50-HV
Replaces up to 1000W
Mogul base
High Voltage
277-480V

Models 8089 thru 8091 have support feet

Ballast Compatible—*Plug 'n Play*

TYPE A

- *Compatible with pulse or probe start magnetic metal halide ballasts*
- *Easiest to install—simply screw into existing socket*

80W
LED-8089M-MHBC
Replaces **250W**
Mogul base

120W
LED-8090M-MHBC
Replaces **320W and 400W**
Mogul base

50W
LED-8088M-MHBC
Replaces **175W**
Mogul base

50W
LED-8088E-MHBC
Replaces **175W**
Edison base

SHOE BOX / WALL PACK

LED for HID RETROFIT™

SPECIFICATIONS

Ballast Bypass | TYPE B

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	UL CLASSIFIED	DIMENSIONS
LED-8086E G4 30W	LED-8086E30-G4	LED-8086E30C-G4	2800	70W	20W	E26 Edison	3000K	✓		5.5" x 3"
	LED-8086E40-G4	LED-8086E40C-G4	2800				4000K	✓		
	LED-8086E50-G4	LED-8086E50C-G4	2880				5000K	✓		
LED-8087E G4 30W	LED-8087E30-G4		3534	100W	30W	E26 Edison	3000K	✓		5.5" x 3"
	LED-8087E40-G4	LED-8087E40C-A	4260				4000K	✓		
	LED-8087E57-G4	LED-8087E57C-A	4255				5000K	✓		
LED-8087M G4 30W	LED-8087M30-G4		3534	100W	30W	E39 Mogul	3000K	✓	✓	6.7" x 3"
	LED-8087M40-G4	LED-8087M40C-A	4260				4000K	✓	✓	
	LED-8087M57-G4	LED-8087M57C-A	4255				5000K	✓	✓	
LED-8088E G4 50W	LED-8088E30-G4	LED-8088E30C-G4	6915	175W	50W	E26 Edison	3000K	✓		7.9" x 3.8"
	LED-8088E40-G4	LED-8088E40C-G4	6460				4000K	✓		
	LED-8088E50-G4	LED-8088E50C-G4	7250				5000K	✓		
LED-8088M G4 50W	LED-8088M30-G4	LED-8088M30C-G4	6915	175W	50W	EX39 Mogul	3000K	✓	✓	8.5" x 3.8"
	LED-8088M40-G4	LED-8088M40C-G4	6460				4000K	✓	✓	
	LED-8088M50-G4	LED-8088M50C-G4	7250				5000K	✓	✓	
LED-8089M G5 80W	LED-8089M30-G5	LED-8089M30C-G5	10670	250W	80W	EX39 Mogul	3000K	✓	✓	8.3" x 4.3"
	LED-8089M40-G5	LED-8089M40C-G5	10760				4000K	✓	✓	
	LED-8089M50-G5	LED-8089M50C-G5	10850				5000K	✓	✓	
LED-8090M G4 110W	LED-8090M30-G4	LED-8090M30C-G4	15745	400W	110W	EX39 Mogul	3000K	✓	✓	11.4" x 4.3"
	LED-8090M40-G4	LED-8090M40C-G4	15430				4000K	✓	✓	
	LED-8090M50-G4	LED-8090M50C-G4	14570				5000K	✓	✓	
LED-8090M G4-T3 110W	LED-8090M40-G4-T3	LED-8090M40C-G4-T3	12630	400W	110W	EX39 Mogul	4000K	✓	✓	11.4" x 4.3"
	LED-8090M50-G4-T3	LED-8090M50C-G4-T3	12840				5000K	✓	✓	
LED-8090M G4-T4 110W	LED-8090M40-G4-T4	LED-8090M40C-G4-T4	12165	400W	110W	EX39 Mogul	4000K	✓	✓	11.4" x 4.3"
	LED-8090M50-G4-T4	LED-8090M50C-G4-T4	12780				5000K	✓	✓	
LED-8090M G4-OCC 110W	LED-8090M40-G4-OCC	LED-8090M40C-G4-OCC	15430	400W	110W	EX39 Mogul	4000K	✓	✓	11.4" x 4.3"
	LED-8090M50-G4-OCC	LED-8090M50C-G4-OCC	14570				5000K	✓	✓	
LED-8090M G4-HV 110W	LED-8090M30-G4-HV		14620	400W	110W	EX39 Mogul	3000K	✓	✓	11.4" x 4.3"
	LED-8090M40-G4-HV		15180				4000K	✓	✓	
	LED-8090M50-G4-HV		15390				5000K	✓	✓	
LED-8091M 320W	LED-8091M30		43090	1000W	320W	EX39 Mogul	3000K	✓	✓	4.5" x 11.2" LED PANEL 8.9" x 12.6"
	LED-8091M40		43380				4000K	✓	✓	
	LED-8091M50		44610				5000K	✓	✓	
LED-8091M HV 320W	LED-8091M30-HV		43090	1000W	320W	EX39 Mogul	3000K	✓	✓	4.5" x 11.2" LED PANEL 8.9" x 12.6"
	LED-8091M40-HV		43380				4000K	✓	✓	
	LED-8091M50-HV		44610				5000K	✓	✓	

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Ballast Compatible | TYPE A

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	c UL us	DIMENSIONS
LED-8088E 50W	LED-8088E40-MHBC	5188	250W	50W	E26 Edison	4000K	✓	7.9" x 3.8"
	LED-8088E57-MHBC	6282				5700K	✓	
LED-8088M 50W	LED-8088M40-MHBC	5188	250W	50W	E39 Mogul	4000K	✓	8.5" x 3.8"
	LED-8088M57-MHBC	6282				5700K	✓	
LED-8089M 80W	LED-8089M40-MHBC	7941	320W	80W	E39 Mogul	4000K	✓	11.4" x 4.3"
	LED-8089M50-MHBC	7635				5000K	✓	
LED-8090M 120W	LED-8090M40-MHBC	9929	400W	120W	E39 Mogul	4000K	✓	11.4" x 4.3"
	LED-8090M50-MHBC	10810				5000K	✓	

VOLTAGE: MH BALLAST ONLY • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Utility Patent Pending 14/710,301

ACTIVE ADVANCED COOLING ON ALL MODELS

Check our website DLC QPL LISTED for listing status

Step-down transformers
available for 480V applications

see page 2

Ballast Bypass—*Internal Driver*

TYPE B

OPEN FIXTURE ONLY

90W
LED-8136M

Replaces up to 250W

Mogul base

135W
LED-8132M

Replaces up to 400W

Mogul base

150W
LED-8130M

Replaces up to 400W

Mogul base
Uplight

150W
LED-8130M-OCC

Replaces up to 400W

Mogul base
Uplight

Occupancy Sensor Remote Included



ENCLOSED FIXTURES

95W
LED-8236M

Replaces up to 250W

Mogul base

140W
LED-8232M

Replaces up to 400W

Mogul base

NEW!

140W
LED-8232M-HV

Replaces up to 400W

Mogul base
High voltage
277-480V

270W
LED-8242M

Replaces up to 1000W

Mogul base

NEW!

270W
LED-8242M-HV

Replaces up to 1000W

Mogul base
High voltage
277-480V

Ballast Compatible—*Plug 'n Play*

TYPE A

- *Compatible with pulse or probe start magnetic metal halide ballasts*
- *Easiest to install—simply screw into existing socket*

100W
LED-8036M-MHBC

Replaces **250W and 320W**

Mogul base

140W
LED-8030M-MHBC

Replaces **320W and 400W**

Mogul base

Aims light upward, sideways, and down

140W
LED-8032M-MHBC

Replaces **320W and 400W**

Mogul base

Total downlight for ultra-high ceilings

HIGH BAY

LED for HID RETROFIT™

A simple upgrade to your existing high bay fixtures that can be done today!

Retrofits into the most popular high bay fixtures

Ideal for use in:

- Large retail spaces
- Industrial spaces
- Auditoriums
- Gymnasiums
- Warehouses
- Factories

Ballast Bypass | TYPE B

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	UL CLASSIFIED	DIMENSIONS
Open Fixture Only										
LED-8136M 90W	LED-8136M40	LED-8136M40C	11825	250W	90W	EX39 Mogul	4000K	✓	✓	9.3" x 8.7"
	LED-8136M50	LED-8136M50C	11825				5000K	✓	✓	
LED-8132M 135W	LED-8132M40	LED-8132M40C	17055	400W	135W	EX39 Mogul	4000K	✓	✓	10" x 8.7"
	LED-8132M50	LED-8132M50C	17095				5000K	✓	✓	
LED-8130M 150W	LED-8130M40	LED-8130M40C	19285	400W	150W	EX39 Mogul	4000K	✓	✓	10" x 8.7"
	LED-8130M50	LED-8130M50C	19375				5000K	✓	✓	
LED-8130M OCC 150W	LED-8130M40-OCC	LED-8130M40C-OCC	19285	400W	150W	EX39 Mogul	4000K	✓	✓	10" x 8.7"
	LED-8130M50-OCC	LED-8130M50C-OCC	19375				5000K	✓	✓	
Enclosed Fixture										
LED-8057M 75W	LED-8057M40-A	LED-8057M40C-A	9607	250W	75W	EX39 Mogul	4000K	✓	✓	8.8" x 5.7"
	LED-8057M50-A	LED-8057M50C-A	9236				5000K	✓	✓	
LED-8236M 95W	LED-8236M40	LED-8236M40C	13320	250W	90W	EX39 Mogul	4000K	✓	✓	9.7" x 8.7"
	LED-8236M50	LED-8236M50C	13865				5000K	✓	✓	
LED-8232M 140W	LED-8232M40	LED-8232M40C	18730	400W	140W	EX39 Mogul	4000K	✓	✓	10.5" x 8.7"
	LED-8232M50	LED-8232M50C	19330				5000K	✓	✓	
NEW! LED-8232M HV 140W	LED-8232M40		18730	400W	140W	EX39 Mogul	4000K	✓	✓	10.5" x 8.7"
	LED-8232M50		19330				5000K	✓	✓	
LED-8242M 270W	LED-8242M40	LED-8242M40C	34415	1000W	270W	EX39 Mogul	4000K	✓	✓	12.5" x 10.2"
	LED-8242M50	LED-8242M50C	35425				5000K	✓	✓	
NEW! LED-8242M HV 270W	LED-8242M40		34415	1000W	270W	EX39 Mogul	4000K	✓	✓	12.5" x 10.2"
	LED-8242M50		35425				5000K	✓	✓	

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Ballast Compatible – Plug 'n Play | TYPE A

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	c UL us	DIMENSIONS
LED-8036M 100W	LED-8036M40-MHBC	11046	Up to 250W	100W	EX39 Mogul	4000K	✓	7.75" x 7.9"
	LED-8036M57-MHBC	10096				5700K	✓	
LED-8030M 140W	LED-8030M40-MHBC	18619	Up to 400W	140W	EX39 Mogul	4000K	✓	9.5" x 9.1"
	LED-8030M57-MHBC	17047				5700K	✓	
LED-8032M 140W	LED-8032M40-MHBC	19578	Up to 400W	140W	EX39 Mogul	4000K	✓	9.5" x 9.1"
	LED-8032M57-MHBC	17892				5700K	✓	

VOLTAGE: MH BALLAST ONLY • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

ACTIVE ADVANCED COOLING

ENCLOSED FIXTURE AND BALLAST COMPATIBLE MODELS ONLY

Check our website DLC QPL LISTED for listing status

LOW BAY

Perfect retrofit for parking garages

Ballast Bypass—*Internal Driver*

TYPE B

45W
LED-8056E

Replaces up to 175W

Edison base

* Design Patent 29/415,685
Utility Patent Pending 13/645,209

45W
LED-8056M

Replaces up to 175W

Mogul base

LED panels angled out and down for optimal performance

60W
LED-8035E*

Replaces up to 175W

Edison base

Uplight provides ceiling illumination and eliminates cave effect

* Design Patent 29/461,332
Utility Patent Pending 14/035,504

Ballast Compatible—*Plug 'n Play*

TYPE A

- *Compatible with pulse or probe start magnetic metal halide ballasts*
- *Easiest to install—simply screw into existing socket*

60W
LED-8035E-MHBC

Replaces **175W and 250W**

Edison base

SPECIFICATIONS

Ballast Bypass | TYPE B

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED UL	DIMENSIONS
LED-8056E 45W	LED-8056E40-A	LED-8056E40C-A	5334	175W	45W	E26 Edison	4000K	✓		6.9" x 5.7"
	LED-8056E50-A	LED-8056E50C-A	5560				5000K	✓		
LED-8056M 45W	LED-8056M40-A	LED-8056M40C-A	5334	175W	45W	EX39 Mogul	4000K	✓	✓	7.4" x 5.7"
	LED-8056M50-A	LED-8056M50C-A	5560				5000K	✓	✓	
LED-8035E 60W	LED-8035E40-A	LED-8035E40C-A	6684	175W	60W	E26 Edison	4000K	✓		6.1" x 7.8"
	LED-8035E57-A	LED-8035E57C-A	7062				5700K	✓		

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Ballast Compatible | TYPE A

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT		DIMENSIONS
LED-8035E 60W	LED-8035E40-MHBC	5773	Up to 250W	60W	E26 Edison	4000K	✓	6.1" x 7.8"
	LED-8035E57-MHBC	5266				5700K	c UL us	

VOLTAGE: MH BALLAST ONLY • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

ACTIVE ADVANCED COOLING

ON ALL MODELS

Check our website for listing status

RECESSED CAN

LED for HID RETROFIT™

Ballast Bypass—*Internal Driver*

TYPE B

30W
LED-8055E
Replaces up to 100W

120° beam angle

Edison base

30W
LED-8055M
Replaces up to 100W

120° beam angle

Mogul base

30W
LED-8054E-G2
Replaces up to 100W

140° beam angle

Edison base

Open Fixture

50W
LED-8045M
Replaces up to 175W

45° beam angle

LED-8045M Penetrating light— optimal for high ceilings!

ACTIVE ADVANCED COOLING

except 8054

SPECIFICATIONS

Ballast Bypass | TYPE B

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED UL	DIMENSIONS
LED-8055E 30W	LED-8055E27	LED-8055E27C	2537	100W	30W	E26 Edison	2700K	✓		6" x 4.7"
	LED-8055E42	LED-8055E42C	2841				4200K	✓		
	LED-8055E57	LED-8055E57C	2885				5700K	✓		
LED-8055M 30W	LED-8055M27	LED-8055M27C	2537	100W	30W	E39 Mogul	2700K	✓	✓	6.8" x 4.7"
	LED-8055M42	LED-8055M42C	2841				4200K	✓	✓	
	LED-8055M57	LED-8055M57C	2885				5700K	✓	✓	
LED-8054E-G2 30W (Open Fixture)	LED-8054E27-G2	LED-8054E27C-G2	2500	100W	30W	E26 Edison	2700K	✓		4.2" x 4.9"
	LED-8054E35-G2	LED-8054E35C-G2	3000				3500K	✓		
	LED-8054E40-G2	LED-8054E40C-G2	3000				4000K	✓		
	LED-8054E50-G2	LED-8054E50C-G2	3000				5000K	✓		
LED-8045M 50W	LED-8045M27		3506	175W	50W	E39 Mogul	2700K	✓	✓	7.1" x 4.7"
	LED-8045M42		4341				4200K	✓	✓	
	LED-8045M57		4686				5000K	✓	✓	

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Ballast Bypass—*Internal Driver*

TYPE B

Entirely Frosted Lens

45W
LED-8024E40-F-A
Replaces up to 250W
Edison base

65W
LED-8046M40-F-A
Replaces up to 320W
Mogul base

High-Performance Post Tops

Angled panels and light filters designed to deliver lumens where they are needed most

30W
LED-8144M
Replaces up to 175W
Mogul base

45W
LED-8145M
Replaces up to 250W
Mogul base

65W
LED-8146M
Replaces up to 320W
Mogul base

35W
LED-8033E-A
Replaces up to 175W
Edison base

35W
LED-8033M-A
Replaces up to 175W
Mogul base

45W
LED-8024E-A
Replaces up to 250W
Edison base

45W
LED-8024M-A
Replaces up to 250W
Mogul base

65W
LED-8046M-A
Replaces up to 320W
Mogul base

100W
LED-8027M-A
Replaces up to 400W
Mogul base

POST TOP

LED for HID RETROFIT™

High-Performance Post Tops

Maximizes lumen output by aiming light where you want it most.

POST TOP SPECIFICATIONS

Ballast Bypass | TYPE B

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	UL CLASSIFIED	DIMENSIONS
LED-8144M 30W HIGH PERFORMANCE POST TOP	LED-8144M30-A	LED-8144M30C-A	3891	175W	30W	EX39 Mogul	3000K	✓	✓	11.4" x 6.8"
	LED-8144M40-A	LED-8144M40C-A	4164				4000K	✓	✓	
	LED-8144M50-A	LED-8144M50C-A	4161				5000K	✓	✓	
LED-8033E 35W	LED-8033E30-A	LED-8033E30C-A	4239	175W	35W	E26 Edison	3000K	✓		8.3" x 3.3"
	LED-8033E40-A	LED-8033E40C-A	5468				4000K	✓		
	LED-8033E57-A	LED-8033E57C-A	5617				5700K	✓		
LED-8033M 35W	LED-8033M30-A	LED-8033M30C-A	4550	175W	35W	EX39 Mogul	3000K	✓	✓	8.5" x 3.3"
	LED-8033M40-A	LED-8033M40C-A	5237				4000K	✓	✓	
	LED-8033M57-A	LED-8033M57C-A	5237				5700K	✓	✓	
LED-8145M 45W HIGH PERFORMANCE POST TOP	LED-8145M30-A	LED-8145M30C-A	5398	250W	45W	EX39 Mogul	3000K	✓	✓	11.4" x 6.8"
	LED-8145M40-A	LED-8145M40C-A	5511				4000K	✓	✓	
	LED-8145M50-A	LED-8145M50C-A	5494				5000K	✓	✓	
LED-8024E 45W	LED-8024E30-A	LED-8024E30C-A	6062	250W	45W	E26 Edison	3000K	✓		9.6" x 3.3"
	LED-8024E40-A	LED-8024E40C-A	6924				4000K	✓		
	LED-8024E57-A	LED-8024E57C-A	6619				5700K	✓		
LED-8024E 45W FROSTED POST TOP	LED-8024E40-F-A		6232	250W	45W	E26 Edison	4000K	✓		9.6" x 3.3"
LED-8024M 45W	LED-8024M30-A	LED-8024M30C-A	5893	250W	45W	EX39 Mogul	3000K	✓	✓	9.8" x 3.3"
	LED-8024M40-A	LED-8024M40C-A	6930				4000K	✓	✓	
	LED-8024M57-A	LED-8024M57C-A	6632				5700K	✓	✓	
LED-8146M 65W HIGH PERFORMANCE POST TOP	LED-8146M30-A	LED-8146M30C-A	8647	320W	65W	EX39 Mogul	3000K	✓	✓	11.4" x 6.8"
	LED-8146M40-A	LED-8146M40C-A	8715				4000K	✓	✓	
	LED-8146M50-A	LED-8146M50C-A	8865				5000K	✓	✓	
LED-8046M 65W	LED-8046M30-A	LED-8046M30C-A	8450	320W	65W	EX39 Mogul	3000K	✓	✓	11.1" x 4.1"
	LED-8046M40-A	LED-8046M40C-A	9587				4000K	✓	✓	
	LED-8046M57-A	LED-8046M57C-A	9499				5700K	✓	✓	
LED-8046M 65W FROSTED POST TOP	LED-8046M40-F-A		8628	320W	65W	EX39 Mogul	4000K	✓	✓	11.1" x 4.1"
LED-8027M 100W	LED-8027M30-A	LED-8027M30C-A	12486	400W	100W	EX39 Mogul	3000K	✓	✓	11.8" x 4.5"
	LED-8027M40-A	LED-8027M40C-A	14666				4000K	✓	✓	
	LED-8027M57-A	LED-8027M57C-A	14613				5700K	✓	✓	

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

ACTIVE ADVANCED COOLING

ON ALL MODELS

Check our website for listing status

BOLLARD

Ballast Bypass—*Internal Driver*

TYPE B

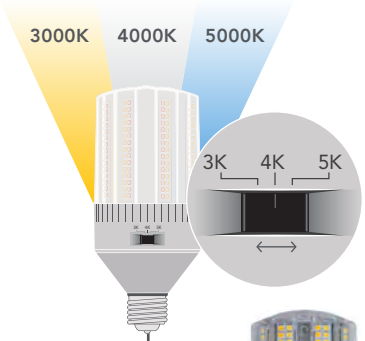

Three color temps in one... flexCOLOR

NEW!

11W
LED-8037E 345-A
Replaces up to 50W
Edison base

14W
LED-8038E 345-A
Replaces up to 70W
Edison base

18W
LED-8039E 345-A
Replaces up to 100W
Edison base

18W
LED-8039M 345-A
Replaces up to 100W
Mogul base

24W
LED-8029E 345-A
Replaces up to 150W
Edison base

24W
LED-8029M 345-A
Replaces up to 150W
Mogul base

20W
LED-8017E
Replaces up to 100W (HID) 150W (INC)
Edison base

Dimmable NEW!

20W
LED-8017E-DIM
Replaces up to 100W (HID) 150W (INC)
Edison base

14W
LED-8015E
Replaces up to 70W (HID) 100W (INC)
Edison base

25W
LED-8018M
Replaces up to 150W (HID) 200W (INC)
Edison base
Mogul base

35W
LED-8019M
Replaces up to 175W (HID) 300W (INC)
Mogul base

INC = INCANDESCENT

LED for HID RETROFIT™

SPECIFICATIONS

Ballast Bypass | TYPE B

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED UL	DIMENSIONS
LED-8037E 14W	LED-8037E345-A	LED-8037E345C-A	1550/**1610**/1650	50W	11W	E26 Edison	3000K/**4000K**/5000K	✓		5.3" x 2.6"
LED-8038E 14W	LED-8038E345-A	LED-8038E345C-A	1850/**1950**/1990	70W	14W	E26 Edison	3000K/**4000K**/5000K	✓		5.3" x 2.6"
LED-8039E 18W	LED-8039E345-A	LED-8039E345C-A	2450/**2560**/2610	100W	18W	E26 Edison	3000K/**4000K**/5000K	✓		6.3" x 2.6"
LED-8039M 18W	LED-8039M345-A	LED-8039M345C-A	2450/**2560**/2610	100W	18W	EX39 Mogul	3000K/**4000K**/5000K	✓	✓	7" x 2.6"
LED-8029E 24W	LED-8029E345-A	LED-8029E345C-A	3170/**3330**/3360	150W	24W	E26 Edison	3000K/**4000K**/5000K	✓		6.6" x 3"
LED-8029M 24W	LED-8029M345-A	LED-8029M345C-A	3170/**3330**/3360	150W	24W	EX39 Mogul	3000K/**4000K**/5000K	✓	✓	6.9" x 3"

NEW!

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

DESCRIPTION	120-277V (NON-DIMMABLE) 120V ONLY (DIMMABLE)	LUMENS	REPLACES	LED POWER	BASE	CCT	ENERGY STAR	DIMENSIONS
LED-8015E 14W	LED-8015E30-G2	1792	70W (HID) 100W (INC)	14W	E26 Edison	3000K	✓	5.3" x 2.6"
	LED-8015E40-G2	1918				4000K	✓	
	LED-8015E50-G2	1960				5000K	✓	
LED-8017E 20W	LED-8017E30-G2	2620	100W (HID) 150W (INC)	20W	E26 Edison	3000K	✓	5.3" x 2.6"
	LED-8017E40-G2	2720				4000K	✓	
	LED-8017E50-G2	2740				5000K	✓	
LED-8017E 20W-DIM*	LED-8017E30-G2-DIM	2500	100W (HID) 150W (INC)	20W	E26 Edison	3000K	✓	5.3" x 2.6"
	LED-8017E40-G2-DIM	2620				4000K	✓	
	LED-8017E50-G2-DIM	2660				5000K	✓	
LED-8018E 25W	LED-8018E30-G2	3160	150W (HID) 200W (INC)	25W	E26 Edison	3000K	✓	6.3" x 3.2"
	LED-8018E40-G2	3350				4000K	✓	
	LED-8018E50-G2	3340				5000K	✓	
LED-8018M 25W	LED-8018M30-G2	3375	150W (HID) 200W (INC)	25W	EX39 Mogul	3000K		6.7" x 3.2"
	LED-8018M40-G2	3525				4000K		
	LED-8018M50-G2	3575				5000K		
LED-8019M 35W	LED-8019M30-G2	4400	175W (HID) 300W (INC)	35W	EX39 Mogul	3000K		6.9" x 3.7"
	LED-8019M40-G2	4400				4000K		
	LED-8019M50-G2	4690				5000K		

NEW!

>80 CRI • E26 = 25,000 HOUR RATED LIFE / EX39 = 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

ACTIVE ADVANCED COOLING

8029 only

E26 = 25,000 HOUR LIFE
EX39 = 50,000 HOUR LIFE

THIS APPLIES TO THE NEW A21/A23 LAMPS ONLY.

Check our website DLC QPL LISTED for listing status

INC = INCANDESCENT
* 120V ONLY

SOX

Unique Lighting Solution Saves Time & Money

two kelvin temperatures to choose from– 2200K or 4000K

- *20W, 35W, 60W and 100W models replacing up to 180W LPS SOX lamps*
- *Advanced active cooling provides excellent thermal management resulting in high light output and long life*
- *Directional light output delivers superior dark sky performance*
- *USA designed and specified internal LED driver*
- *Innovative aluminum heat sink with size options to fill entire fixture*
- *Support harness included*

SPECIFICATIONS

Ballast Bypass – Internal Driver | TYPE B								
DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	c UL us	DIMENSIONS
12" SOX 20W	LED-8100-22K	2030	35W	20W	B22	2200K	✓	12.1" x 2.7"
	LED-8100-40K	3022				4000K	✓	
16" SOX 35W	LED-8101-22K	3232	55W	35W	B22	2200K	✓	16.7" x 2.7"
	LED-8101-40K	5156				4000K	✓	
20" SOX 60W	LED-8102-22K	5769	90W	60W	B22	2200K	✓	20.5" x 2.7"
	LED-8102-40K	8198				4000K	✓	
43" SOX 100W	LED-8104-22K	11576	180W	100W	B22	2200K	✓	43.5" x 2.7"
	LED-8104-40K	15472				4000K	✓	
VOLTAGE: 120-277VAC • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY								

ALL SIZES AVAILABLE IN AMBER VIA SPECIAL ORDER

HAZARDOUS LOCATION

LED for HID RETROFIT™

Ballast Bypass—*Internal Driver*

TYPE B

All models feature top-mounted LEDs

Perfect retrofit for hazardous locations such as:

- Nuclear Reactor Sites
- Wastewater Treatment Plants
- Oil Refineries
- Oil Rigs
- Mine Tunnels

24W
LED-8929M-HAZ

Replaces up to 150W

Mogul base

24W
LED-8929E-HAZ

Replaces up to 150W

Edison base

Approved for **Hazardous Location: Class 1, Division 2**

See our website for a list of approved fixtures

ACTIVE ADVANCED COOLING

SPECIFICATIONS

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED UL	DIMENSIONS
LED-8929E 24W	LED-8929E57-HAZ	LED-8929E57C-HAZ	3400	150W	24W	E26 Edison	5700K	✓		6.75" x 2.9"
LED-8929M 24W	LED-8929M57-HAZ	LED-8929M57C-HAZ	3400	150W	24W	EX39 Mogul	5700K	✓	✓	7" x 2.9"

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

PL



Our latest pin-based LED retrofits are perfect for PL applications, and provide a long-lasting LED alternative for walls or recessed areas in offices, hotels, lobbies, schools, etc.

2-PIN

Compatible bases



OR

4-PIN

Compatible bases



HORIZONTAL

Type A/B — UNIVERSAL

7W
LED-7311
Replaces up to 13W
G23-2 base

7W
LED-7312
Replaces up to 13W
GX23-2 base

7W
LED-7322
Replaces up to 26W
G24d base

Type A/B — UNIVERSAL

NEW!
11W
LED-7324-G3
Replaces up to 42W
G/GX24q base

Type A — PLUG 'nPLAY

11W
LED-7334
Replaces up to 26W
G/GX24q base

OMNI-DIRECTIONAL

Type A/B — UNIVERSAL

5W
LED-7300
Replaces up to 13W
GX23 base

Type A/B — UNIVERSAL

NEW!
10W
LED-7320-G3
Replaces up to 42W
G/GX24q base

Type A — PLUG 'nPLAY

10W
LED-7330
Replaces up to 26W
G/GX24q base

VERTICAL

Type A/B — UNIVERSAL

12W
LED-7318
Replaces up to 26W
G/GX24q base

Type A — PLUG 'nPLAY

12W
LED-7338
Replaces up to 26W
G/GX24q base

Also Available

LED-7319
Extender for 7318 and 7338

Type B Only

23W
LED-7340
Replaces up to 42W
2G11 base

NEW!
7W
LED-7310-G3
Replaces up to 32W
G24d/q base

25W
LED-7342
Replaces up to 42W
G24q base

telescoping horizontal & fixed vertical adapter included w/ each lamp

Type A = Ballast Compatible
Type A/B = Ballast Bypass 120-277V or Ballast Compatible
Type B = Ballast Bypass

LED for PL RETROFIT™

SPECIFICATIONS

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	BEAM ANGLE	CCT	DIMENSIONS
LED-7300 5W 2-PIN UNIVERSAL / TYPE A+B	LED-7300-27K-G2	500	13W	5W	GX23	360°	2700K	5.5" x 1.4"
	LED-7300-35K-G2	550					3500K	
	LED-7300-40K-G2	550					4000K	
	LED-7300-50K-G2						5000K	
new! **LED-7310** 5W 2-PIN UNIVERSAL / TYPE B	LED-7310-27K-G3	890	32W	7W	G24d/q	360°	2700K	5.5" x 1.4"
	LED-7310-35K-G3	949					3500K	
	LED-7310-40K-G3	970					4000K	
	LED-7310-50K-G3	990					5000K	
LED-7311 7W 2-PIN UNIVERSAL / TYPE A+B	LED-7311-27K-G3	815	13W	7W	G23-2	120°	2700K	5.8" x 1.4"
	LED-7311-35K-G3	883					3500K	
	LED-7311-40K-G3	892					4000K	
	LED-7311-50K-G3						5000K	
LED-7312 7W 2-PIN UNIVERSAL / TYPE A+B	LED-7312-27K-G3	801	13W	7W	GX23-2	120°	2700K	5.8" x 1.4"
	LED-7312-35K-G3	899					3500K	
	LED-7312-40K-G3	914					4000K	
	LED-7312-50K-G3						5000K	
LED-7318 12W 4-PIN UNIVERSAL / TYPE A+B	LED-7318-27K-A	837	26W	12W	G/GX24q	120°	2700K	3.8" x 3"
	LED-7318-35K-A	1157					3500K	
	LED-7318-40K-A	1198					4000K	
LED-7319 12W 4-PIN UNIVERSAL / TYPE A+B	LED-7319	Extender for 7318 and 7338			G24q/d			
LED-7320 10W 4-PIN UNIVERSAL / TYPE A+B	LED-7320-27K-G3	1350	42W	10W	G/GX24q	360°	2700K	6.2" x 1.4"
	LED-7320-35K-G3	1550					3500K	
	LED-7320-40K-G3	1600					4000K	
	LED-7320-50K-G3	1635					5000K	
LED-7322 7W 2-PIN UNIVERSAL / TYPE A+B	LED-7322-27K-G3	849	26W	7W	G24d	120°	2700K	5.8" x 1.4"
	LED-7322-35K-G32	869					3500K	
	LED-7322-40K-G3	887					4000K	
	LED-7322-50K-G3						5000K	
LED-7324 11W 4-PIN UNIVERSAL / TYPE A+B	LED-7324-27K-G3	1050	42W	11W	G/GX24q	360°	2700K	5.6" x 1.3"
	LED-7324-35K-G3	1125					3500K	
	LED-7324-40K-G3	1200					4000K	
	LED-7324-50K-G3	1200					5000K	
LED-7330 10W 4-PIN BALLAST COMPATIBLE / TYPE A	LED-7330-27K-G2	760	26W	10W	G/GX24q	360°	2700K	6.2" x 1.4"
	LED-7330-35K-G2	850					3500K	
	LED-7330-40K-G2	916					4000K	
LED-7334 11W 4-PIN BALLAST COMPATIBLE / TYPE A	LED-7334-27K-G2	974	26W	11W	G/GX24q	120°	2700K	5.8" x 1.4"
	LED-7334-35K-G2	1057					3500K	
	LED-7334-40K-G2	1014					4000K	
LED-7338 12W 4-PIN BALLAST COMPATIBLE / TYPE A	LED-7338-27K-A	1100	26W	12W	G/GX24q	120°	2700K	3.8" x 3"
	LED-7338-35K-A	1100					3500K	
	LED-7338-40K-A	1100					4000K	
LED-7340 23W 4-PIN BALLAST BYPASS / TYPE B	LED-7340-30K-G2	2100	40W	17W	2G11	160°	42W	22" x 1.6"
	LED-7340-35K-G2	2100					42W	22" x 1.6"
	LED-7340-40K-G2	2200					42W	22" x 1.6"
LED-7342 25W 4-PIN BALLAST BYPASS / TYPE B	LED-7342-27K-G2	2000	42W	25W	G24q	140°	2700K	4.2" x 3.6"
	LED-7342-35K-G2	2500					3500K	
	LED-7342-40K-G2	2500					4000K	
new! **LED-7356-SP** 40W PAR 56 LAMP	LED-7356-SP30	3500	300W	40W	GX16d	15°	3000K	7" x 7" x 5"
	LED-7356-SP40						4000K	8" x 7" x 5"
	LED-7356-SP50						5000K	9" x 7" x 5"
new! **LED-7356-NF** 25W PAR 56 LAMP	LED-7356-NF30	3500	300W	40W	GX16d	25°	3000K	10" x 7" x 5"
	LED-7356-NF40						4000K	11" x 7" x 5"
	LED-7356-NF50						5000K	12" x 7" x 5"
new! **LED-7356-FL** 25W PAR 56 LAMP	LED-7356-FL30	3500	300W	40W	GX16d	40°	3000K	13" x 7" x 5"
	LED-7356-FL40						4000K	14" x 7" x 5"
	LED-7356-FL50						5000K	15" x 7" x 5"

VOLTAGE: 120-277VAC • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

new!

PAR 56 LAMPS

- Available in three different beam angles – Spot, Narrow Flood and Flood
- Forward-phase, line voltage dimmable
- Suitable for damp locations

40W

LED-7356-SP
LED-7356-NF
LED-7356-FL

Replaces up to 300W Halogen
GX16d base

c UL us

UL LISTED

CLASSIFIED UL

Check our website for listing status

LINEAR T8

Energy-Saving Replacement for Fluorescent T8

Ballast Compatible* & *Line Voltage* TYPE A+B

2 METHODS OF INSTALLATION

- UL Type A: plug & play compatible with almost all fluorescent ballasts (see ballast compatibility guide for more details).
- UL Type B Double-End 120-277V: ballast bypass installation using non-shunted or shunted sockets with power applied to both ends of the tube.

SHUNTED

NON SHUNTED

SPECIFICATIONS

Ballast Compatible* & LINE VOLTAGE | TYPE A+B

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
2' T8 - 10W	RPT-B-TOTALTUBE-T8-G3 2FT-835-A	1350	17WL	10W	G13 Bi-Pin	3500K	✓	1" x 24"
2' T8 - 10W	RPT-B-TOTALTUBE-T8-G3 2FT-840-A	1350	17W	10W	G13 Bi-Pin	4000K	✓	1" x 24"
2' T8 - 10W	RPT-B-TOTALTUBE-T8-G3 2FT-850-A	1350	17W	10W	G13 Bi-Pin	5000K	✓	1" x 24"
3' T8 - 10W	RPT-B-TOTALTUBE-T8-G3 3FT-835-A	1350	25W	10W	G13 Bi-Pin	3500K	✓	1" x 36"
3' T8 - 10W	RPT-B-TOTALTUBE-T8-G3 3FT-840-A	1350	25W	10W	G13 Bi-Pin	4000K	✓	1" x 36"
3' T8 - 10W	RPT-B-TOTALTUBE-T8-G3 3FT-850-A	1350	25W	10W	G13 Bi-Pin	5000K	✓	1" x 36"
4' T8 - 12W	RPT-B-TOTALTUBE-T8-G3 4FT-835-A	1620	32W	12W	G13 Bi-Pin	3500K	✓	1" x 48"
4' T8 - 12W	RPT-B-TOTALTUBE-T8-G3 4FT-840-A	1620	32W	12W	G13 Bi-Pin	4000K	✓	1" x 48"
4' T8 - 12W	RPT-B-TOTALTUBE-T8-G3 4FT-850-A	1620	32W	12W	G13 Bi-Pin	5000K	✓	1" x 48"
4' T8 HO - 15W	RPT-B-TOTALTUBE-T8-G3 4FTHO-835-A	2025	32W	15W	G13 Bi-Pin	3500K	✓	1" x 48"
4' T8 HO - 15W	RPT-B-TOTALTUBE-T8-G3 4FTHO-840-A	2025	32W	15W	G13 Bi-Pin	4000K	✓	1" x 48"
4' T8 HO - 15W	RPT-B-TOTALTUBE-T8-G3 4FTHO-850-A	2025	32W	15W	G13 Bi-Pin	5000K	✓	1" x 48"
2' T8 - UBEND - 15W	RPT-B-TOTALTUBE-T8-G3 2FTU1-835-A	1950	32W	15W	G13 Bi-Pin	3500K	✓	2" x 24"
2' T8 - UBEND - 15W	RPT-B-TOTALTUBE-T8-G3 2FTU1-840-A	1950	32W	15W	G13 Bi-Pin	4000K	✓	2" x 24"
2' T8 - UBEND - 15W	RPT-B-TOTALTUBE-T8-G3 2FTU6-835-A	1950	32W	15W	G13 Bi-Pin	3500K	✓	6" x 24"
2' T8 - UBEND - 15W	RPT-B-TOTALTUBE-T8-G3 2FTU6-840-A	1950	32W	15W	G13 Bi-Pin	4000K	✓	6" x 24"

>80 CRI • 100,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Check our website for listing status

* Refer to ballast compatibility list on led-llc.com

Ballast Bypass—*Internal Driver*

TYPE B

Double-ended Power

Shunted or non-shunted lamp holder



Ballast Bypass – Internal Driver | TYPE B | DOUBLE-ENDED POWER

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
2' T8 - 9W	LED-9T8-835DE24-G3	1100	17W	9W	G13	3500K	✓	23.7" x 1.1"
2' T8 - 9W	LED-9T8-840DE24-G3	1150	17W	9W	G13	4000K	✓	23.7" x 1.1"
2' T8 - 9W	LED-9T8-850DE24-G3	1150	17W	9W	G13	5000K	✓	23.7" x 1.1"
3' T8 - 12W	LED-12T8-835DE36-G3	1400	25W	12W	G13	3500K	✓	35 .7" x 1.1"
3' T8 - 12W	LED-12T8-840DE36-G3	1450	25W	12W	G13	4000K	✓	35.7" x 1.1"
3' T8 - 12W	LED-12T8-850DE36-G3	1450	25W	12W	G13	5000K	✓	35.7" x 1.1"
4' T8 - 12W	LED-12T8-835DE48-G3	1700	32W	12W	G13	3500K	✓	47.7" x 1.1"
4' T8 - 12W	LED-12T8-840DE48-G3	1800	32W	12W	G13	4000K	✓	47.7" x 1.1"
4' T8 - 12W	LED-12T8-850DE48-G3	1800	32W	12W	G13	5000K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-835DE48-G3	2100	32W	15W	G13	3500K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-840DE48-G3	2200	32W	15W	G13	4000K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-850DE48-G3	2200	32W	15W	G13	5000K	✓	47.7" x 1.1"
8' T8 - 42W	LED-42T82P-840DE96-G4	5040	86W	42W	FA8	4000K	✓	
8' T8 - 42W	LED-42T82P-850DE96-G4	5040	86W	42W	FA8	5000K	✓	
DOUBLE END RECESSED END CAP	LED-R17D-ENDCAP	NA	NA	NA	NA	NA		
4' T5 HO - 25W	LED-25T5HO-835DE48-G3	3300	54W	25W	G5	3500K	✓	47.7" x 1.0"
4' T5 HO - 25W	LED-25T5HO-840DE48-G3	3500	54W	25W	G5	4000K	✓	47.7" x 1.0"
4' T5 HO - 25W	LED-25T5HO-850DE48-G3	3500	54W	25W	G5	5000K	✓	47.7" x 1.0"

NEW!

Check our website for listing status.

Ballast Bypass—*Internal Driver*

TYPE B

Single-ended Power | Non-shunted lamp holder



Ballast Bypass – Internal Driver | TYPE B | SINGLE-ENDED POWER

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
4' T8 - 18W	LED-18T8-840SE48-G3	2200	32W	18W	G13	4000K	✓	47.7" x 1.0"
4' T8 - 18W	LED-18T8-850SE48-G3	2200	32W	18W	G13	5000K	✓	47.7" x 1.0"
2' T8U6-15W	LED-18U6-835SE-G3	2100	32W	18W	2G13	3500	✓	22.5" x 7.0" x 1.1"
2' T8U6-15W	LED-18U6-840SE-G3	2200	32W	18W	2G13	4000	✓	22.5" x 7.0" x 1.1"
2' T8U6-15W	LED-18U6-850SE-G3	2200	32W	18W	2G13	5000	✓	22.5" x 7.0" x 1.1"

RemPhos
by Light Efficient Design

We're bringing a new species of lighting to the Light Efficient Design family of LED products. With a focus on innovation and thoughtful LED lighting, our new RemPhos product offering enhances our commitment to *Powering the Switch to LED...**ALL** WAYS.*

Our newest line of LED retrofit kits and fixtures includes products featuring RemPhos innovative "FLEX" technologies.

flexCOLOR
choose from 3 different color temperatures

flexWATT
4 wattages in one product

flexCONTROL
order without controls, basic or advanced control

One piece design. Easy Install.

1st to market

- *to have the ability to be installed as a retrofit kit or as a new fixture*
- *is a door style retrofit kit with just one piece, creating a seamless, no air gap look*
- *you can choose from a volumetric or a flat panel design*

NEW!

2x2, 1x4, 2x4
RP-TTV (Volumetric)
16W-28W, 20W-40W
3500°K, 4000°K, 5000°K

2x2, 1x4, 2x4
RP-TTF (Flat Panel)
16W-28W, 20W-40W
3500°K, 4000°K, 5000°K

NEW!

10 YEAR WARRANTY

TROFFER TRANSFORMER SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	CONTROLER/ OCCUPANCY SENSOR	ETL	RoHS	DIMENSIONS
RP-TTV-G1 (NEW!)	2x2 Troffer Transformer Volumetric	RP-TTV-G1-2X2-20L-840-FWFC	2032	**16W** (16-28W)	3500/**4000**/5000K	OPTIONAL	✓	✓	23.75" x 23.75"
	1x4 Troffer Transformer Volumetric	RP-TTV-G1-1X4-25L-840-FWFC	2480	**20W** (16-28W)	3500/**4000**/5000K	OPTIONAL	✓	✓	11.75" x 47.75"
	2x4 Troffer Transformer Volumetric	RP-TTV-G1-2X4-33L-840-FWFC	3390	**26W** (20-40W)	3500/**4000**/5000K	OPTIONAL	✓	✓	23.75" x 47.75"
RP-TTF-G1 (NEW!)	2x2 Troffer Transformer Flat Panel	RP-TTF-G1-2X2-20L-840-FWFC	2032	**16W** (16-28W)	3500/**4000**/5000K	OPTIONAL	✓	✓	23.75" x 23.75"
	1x4 Troffer Transformer Flat Panel	RP-TTF-G1-1X4-25L-840-FWFC	2480	**20W** (16-28W)	3500/**4000**/5000K	OPTIONAL	✓	✓	11.75" x 47.75"
	2x4 Troffer Transformer Flat Panel	RP-TTF-G1-2X4-33L-840-FWFC	3390	**26W** (20-40W)	3500/**4000**/5000K	OPTIONAL	✓	✓	23.75" x 47.75"
VOLTAGE: 120-277VAC • 85 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY									

Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT: **1**. You can easily adjust in field via our FlexWatt and FlexColor internal switches. **2**. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

DRUM / SCONCE / VANITY

RemPhos
lighting on target

5 styles. 4 lumen packages. 3 color temperatures. 2 control options.
1 perfect solution for all your drum, linear + sconce retrofit needs.

9IN
LEDCR-G2
6W, **10W**, 16W, 22W
3000°K, 3500°K, **4000°K**
(expandable LED boards)

4IN
LEDSR-G2
6W, 10W, 12W, 15W
3000°K, 3500°K, **4000°K**
(expandable LED boards)



14INE
LEDSR-G2
6W, 10W, 12W, 15W
3000°K, 3500°K, **4000°K**
(fixed LED boards)

9IN
LEDSR-G2
6W, 10W, 12W, 15W
3000°K, 3500°K, **4000°K**
(fixed LED boards)

14INM
LEDSR-G2
6W, 10W, 12W, 15W
3000°K, 3500°K, **4000°K**
(fixed LED boards)

Optional integrated high/low motion and daylight sensor. Completely adjustable and hidden behind the fixture lens

Retrofit these fixtures & more

SURFACE MOUNTS

VANITIES/LINEARS

WALL MOUNTS

DRUM/SCONCE/VANITY RETROFIT SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	CONTROLER/ OCCUPANCY SENSOR	ETL	ENERGY STAR	DIMENSIONS
LEDCR-G2 10W	9" Circular Drum Retrofit	RPT-P-LEDCR-G2-9IN-14L-840-FWFC	1370 (780-3124)	10W (6-22W)	3000/3500/**4000K**	NO	✓	✓	8.7" x 8.7" x 2"
	9" Circular Drum Retrofit w/Occ Sensor	RPT-P-LEDCR-G2-9IN-14L-840-FWFC-OCC	1370 (780-3124)	10W (6-22W)	3000/3500/**4000K**	YES	✓	✓	8.7" x 8.7" x 2"
LEDSR-G2 6W	4" Sconce Retrofit	RPT-P-LEDSR-G2-4IN-8L-840-FWFC	816 (780-2130)	6W (6-15W)	3000/3500/**4000K**	NO	✓	✓	6.5" x 7" x 2.1"
	4" Sconce Retrofit w/Occ Sensor	RPT-P-LEDSR-G2-4IN-8L-840-FWFC-OCC	816 (780-2130)	6W (6-15W)	3000/3500/**4000K**	YES	✓		6.5" x 7" x 2.1"
	9" Sconce Retrofit	RPT-P-LEDSR-G2-9IN-8L-840-FWFC	816 (780-2130)	6W (6-15W)	3000/3500/**4000K**	NO	✓	✓	8.7" x 4.5" x 2"
	9" Sconce Retrofit w/Occ Sensor	RPT-P-LEDSR-G2-9IN-8L-840-FWFC-OCC	816 (780-2130)	6W (6-15W)	3000/3500/**4000K**	YES	✓		8.7" x 4.5" x 2"
	14" Vanity Retrofit (End Mnt Drv)	RPT-P-LEDSR-G2-14INE-8L-840-FWFC	816 (780-2130)	6W (6-15W)	3000/3500/**4000K**	NO	✓	✓	14" x 2.7" x 2.1"
	14" Vanity Retrofit (End Mnt Drv) w/Occ Sensor	RPT-P-LEDSR-G2-14INE-8L-840-FWFC-OCC	816 (780-2130)	6W (6-15W)	3000/3500/**4000K**	YES	✓		14" x 2.7" x 2.1"
	14" Vanity Retrofit (Mid Mnt Drv)	RPT-P-LEDSR-G2-14INM-8L-840-FWFC	816 (780-2130)	6W (6-15W)	3000/3500/**4000K**	NO	✓	✓	14" x 2.7" x 2.1"
	14" Vanity Retrofit (Mid Mnt Drv) w/Occ Sensor	RPT-P-LEDSR-G2-14INM-8L-840-FWFC-OCC	816 (780-2130)	6W (6-15W)	3000/3500/**4000K**	YES	✓		14" x 2.7" x 2.1"

VOLTAGE: 120-277VAC • 85 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY

10 YEAR WARRANTY

Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:
1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. **2**. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

LINEAR BARKITS

Perfect for *Linear and general purpose, Strips & Wraps, Troffers, Vapor Tights, Low bay and High bay, Coves and Soffits, Stairwells*

One light. Unlimited possibilities.
ETL and DLC listed as both a retrofit kit and a fixture.

available in both BASE & PRO

INTERNAL DRIVER

6W-25W

RP-LBI

available in 2ft, 3ft, 4ft lengths

2.5W-20W/per bar (10W-80W kit)

RPT-BARKITJ

available in 2ft, 3ft, 4ft lengths

EXTERNAL DRIVER

LBI ACCESSORIES (SOLD SEPARATELY UNLESS NOTED OTHERWISE)

EMERGENCY BATTERY BACKUP

6IN, 12IN, 18IN
LINKING CABLES

SEAMLESS CONNECTOR

OC2 SENSOR KIT

4.7IN SPACER CONNECTOR



2' or 7'
CORD WITH PLUG & ON/OFF SWITCH

INCOMING POWER KIT



SUSPENDED IN-LINE BRACKET KIT

2 clips are included in each LBI kit

SURFACE MOUNT MAGNETIC CLIP

45 DEGREE BRACKET/CLIP

UP/DOWN CLIP

T-BAR CLIP

LINEAR BARKIT SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	ETL	DIMENSIONS
PRO LED BARKIT INTERNAL DRIVER	2' PRO Internal Drive Light Bar	RP-LBI-G1-2F-6W-40K-WC	780-1560	**6W** (6-12W)	3500/**4000**/5000K	✓	1.2" x 1.2" x 19.3"
	2' PRO Warm CCT Internal Drive Light Bar	RP-LBI-G1-2F-6W-27K-WC2	696-1524	**6W** (6-12W)	**2700**/3000/3500K	✓	1.2" x 1.2" x 19.3"
	3' PRO Internal Drive Light Bar	RP-LBI-G1-3F-10W-40K-WC	1400-2100	**10W** (10-15W)	3500/**4000**/5000K	✓	1.2" x 1.2" x 31.3"
	3' PRO Warm CCT Internal Drive Light Bar	RP-LBI-G1-3F-10W-27K-WC2	1270-1890	**10W** (10-15W)	**2700**/3000/3500K	✓	1.2" x 1.2" x 31.3"
	4' PRO Internal Drive Light Bar	RP-LBI-G1-4F-15W-40K-WC	1370-3425	**15W** (10-25W)	3500/**4000**/5000K	✓	1.2" x 1.2" x 43.3"
	4' PRO Warm CCT Internal Drive Light Bar	RP-LBI-G1-4F-15W-27K-WC2	1260-3400	**15W** (10-25W)	**2700**/3000/3500K	✓	1.2" x 1.2" x 43.3"

VOLTAGE: 120-277VAC • 80+ CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY

Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:
1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. **2**. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

PRODUCT	DESCRIPTION	RemPhos Part #	LUMENS	WATT	CCT	ETL	DIMENSIONS
BASE LED BARKIT INTERNAL DRIVER	4' BASE Internal Drive Light Bar	RP-LBI-G1-4F-15W-40K-B	2325	15W	4000	✓	1.2" x 1.2" x 43.3"

VOLTAGE: 120-277VAC • 80+ CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS	WATT	CCT OPTIONS	UL LISTED	DIMENSIONS
LED BARKITJ EXTERNAL DRIVER	One 4' Bar & One 15W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-15W-4FT-1L-840	1950	15W	4000	✓	44.4" X 1" X 1"
	Two 4' Bars & One 20W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-30W-4FT-2L-840	3900	30W	4000	✓	44.4" X 1" X 1"
	Three 4' Bars & One 40W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-40W-4FT-3L-840	5200	40W	4000	✓	34.3" X 1" X 1"
	Four 4' Bars & One 60W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-60W-4FT-4L-840	7800	60W	4000	✓	34.3" X 1" X 1"
	One 2' Bar & One 10W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-10W-2FT-1L-840	1300	10W	4000	✓	21.7" X 1" X 1"
	Two 2' Bars & One 20W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-20W-2FT-2L-840	2600	20W	4000	✓	21.7" X 1" X 1"
	90 Min Battery Backup Kit	RPT-ACCESSORY-EMGKIT-HS1-500LM	500	<4W	4000	✓	
	90 Min Battery Backup Kit	RPT-ACCESSORY-EMGKIT-HS1-1000LM	1000	<4W	4000	✓	

VOLTAGE: 120-277VAC • 80+ CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY

LEDBLOCK G3®

RemPhos
lighting on target

Perfect for

High Bays, Floodlights, Wall Packs, Shoe Box

Directional 180° HID Retrofit Kit

This high-power LED Block G3 retrofit module replaces HID, HPS or MH lamps , and comes with our next generation mounting bracket system that can be used in either vertical or horizontal orientation.

30W-280W

Replaces up to 1000W

ACTIVE ADVANCED COOLING



CHECK OUT THE RPT MODELS BELOW FOR ULTIMATE FLEXIBILITY AND EVEN MORE FEATURES

LEDBLOCK® SPECIFICATIONS

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	ETL	DIMENSIONS
LED BLOCK KITS	LED-8150-50K	20565	400W	150W	NA	5000K	✓	11.8" x 6.4" x 5.1"
	LED-8280-50K	38765	1000W	280W	NA	5000K	✓	16.9" x 10.5" x 6.1"
	LED-8280-50K-HV (480V)	38765	1000W	280W	NA	5000K	✓	16.9" x 10.5" x 6.1"

VOLTAGE: 120-277VAC • >70 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY (LED-8150-8280)

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	ETL	DIMENSIONS
RPT BLOCK KITS	RPT-LEDBLOCK-65L-750 -10VDIM-G3	5100	175W	30W	N/A	5000K	✓	4.7" x 4.7"
	RPT-LEDBLOCK-100L-750 -10VDIM-G3	8850	250W	52W	N/A	5000K	✓	4.7" x 4.7"
	RPT-LEDBLOCK-150L-750 -10VDIM-G3	15700	400W	100W	N/A	5000K	✓	5.1" x 6.1"
	RPT-LEDBLOCK-200L-750 -10VDIM-G3	20000	400W	110W	N/A	5000K	✓	5.1" x 6.1"
	RPT-LEDBLOCK-300L-750 -10VDIM-G3	24000	>400W	150W	N/A	5000K	✓	7.9" x 5.9"
	RPT-LEDBLOCK-400L-750 -10VDIM-G3	43000	1000W	277W	N/A	5000K	✓	10.6" x 10"

VOLTAGE: 120-277VAC • >70 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY (RPT-LEDBLOCK-G3)

10 YEAR WARRANTY

Check our website for listing status

ACCESSORIES SPECIFICATIONS

DESCRIPTION	MODEL #	TYPE	MAX WATTAGE	INPUT/OUTPUT VOLTAGE	THD	POWER FACTOR	DIMENSIONS
STEP DOWN TRANSFORMERS	MTM04506224C-LW	450VA Stepdown transformer	400W	480/347V in 277V out	3.4% 3.8%	0.99	4.2" x 2.7" x 2.2"
	MTM01606224C-LW	160VA Stepdown transformer	140W	480/347V in 277V out	4.3% 4.1%	0.99	4.2" x 2.0" x 1.6"
	MTM00506224C-LW	50VA Stepdown transformer	45W	480/347V in 240V out	6.2% 6.7%	0.98 0.97	3.0" x 1.7" x 1.4"

Appealing design makes it a perfect fixture for many different applications

- *1-10V Dimmable*
- *Sensor ready; PIR or Microwave*
- *Multiple mounting options; surface mount or pendant mount*
- *Mounting chains and v-hooks included*

NEW!

165W, 300W
RP-LHB-G2

Replaces up to 1000W

HIGH BAY LUMINAIRE SPECIFICATIONS

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
NEW! 165W LINEAR HIGH BAY FIXTURE	RP-LHB-24-200L-850-G2	20000	400W	165W	NA	5000K	✓	12.6" x 23.8" x 2"
NEW! 300W LINEAR HIGH BAY FIXTURE	RP-LHB-48-390L-850-G2	40000	1000W	300W	NA	5000K	✓	12.6" x 46" x 2"

VOLTAGE: 120-277VAC • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

PRODUCT	DESCRIPTION	RemPhos Part #
LINEAR HIGH BAY ACCESSORIES	SURFACE MOUNT BRACKET	RP-LHB-SURFMT
	PENDANT MOUNT KIT	RP-LHB-PENDANT
	PIR SENSOR (EXTERNAL)	RP-LHB-PIRSENSOR
	MICROWAVE SENSOR (EXTERNAL)	RP-LHB-MWSENSOR
	BATTERY BACKUP 24W	RP-LHB-BBU24W
	WIRE GUARD FOR 200L	RP-LHB-WIREGUARD-200L
	WIRE GUARD FOR 390L	RP-LHB-WIREGUARD-390L
	EXTERNAL 10KA SURGE ARRESTOR	SPD-277P-10KA-EC1

HIGH TEMPERATURE HIGH BAY

Superior performance in extreme environments. 176°F ambient rating, suitable for foundries, steel mills, smelters and other demanding applications.

150W
RP-HTHB

Replaces up to 400W HID

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	VOLTAGE	CCT	UL LISTED	DIMENSIONS
150W HIGH TEMP HIGH BAY	RP-HTHB-21L-50K	>21000	400W	150W	120-277	5000K	✓	22" x 10.2"
150W (HIGH VOLTAGE) HIGH TEMP HIGH BAY	RP-HTHB-21L-50K-HV	>21000	400W	150W	347-480	5000K	✓	22" x 10.2"

70 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Check our website for listing status

PRODUCT	DESCRIPTION	RemPhos Part #
HIGH TEMP HIGH BAY ACCESSORIES	60° REFLECTOR FOR HIGH TEMP HIGH BAY	RP-HTBH-REFLECTOR-60DEG
	JUNCTION BOX FOR HIGH TEMP HIGH BAY	RP-HTBH--JBOX
	JBOX BRACKET FOR HIGH TEMP HIGH BAY	RP-HTBH--JBOXBRACKET
	TRUNNION BRACKET FOR HIGH TEMP HIGH BAY	RP-HTBH--TRUNBRACKET

CEILING & WALL

Surface mount LED drum & sconce fixtures featuring RemPhos' flexWATT + flexCOLOR + flexCONTROL Technologies.

Powered by the LEDCR G2 Light Engine
see page 21

14IN, 18IN
Designer Drum G2
6W, **10W**, 16W, 22W
3000K, 3500K, **4000K**

11IN, 14IN
Utility Drum G2
6W, **10W**, 16W, 22W
3000K, 3500K, **4000K**

Powered by the LEDSR G2 Light Engine
see page 21

12IN
Outdoor Drum G2
6W, **10W**, 16W, 22W
3000K, 3500K, **4000K**

13IN
Tough Drum G2
6W, **10W**, 16W, 22W
3000K, 3500K, **4000K**

15IN
Glass Drum G2
6W, **10W**, 16W, 22W
3000K, 3500K, **4000K**

11IN
Designer Sconce G2
6W, **10W**, 16W, 22W
3000K, 3500K, **4000K**

NEW! Base model drum fixtures – Choose from 2 styles

14IN
Base Utility Drum
6W, **10W**, 15W
3000K, 3500K, **4000K**

14IN
Base Designer Drum
6W, **10W**, 15W
3000K, 3500K, **4000K**

PRODUCT	DESCRIPTION	PART #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	CONTROLER/ OCCUPANCY SENSOR	ETL	ENERGY STAR	DIMENSIONS
BASE DRUM	14" DESIGNER DRUM	RP-B-DD-14N-10L-840-WC	**840** (600-1500)	**10W** (6-15W)	3000/3500/**4000K**	NO	✓	✓	TBD
	14" UTILITY DRUM	RP-B-UD-14N-10L-840-WC	**840** (600-1500)	**10W** (6-15W)	3000/3500/**4000K**	NO	✓	✓	TBD
VOLTAGE: 120-277VAC • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY									
LED DRUM	11" Utility Drum Luminaire	RP-DRU-11N-14L-40K-WC-G2-A	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	NO	✓	✓	3.5" x 11"
	11" Utility Drum Luminaire w/OCC Sensor	RP-DRU-11N-14L-40K-WC-G2-OC1-A	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	YES	✓	✓	3.5" x 14"
	14" Utility Drum Luminaire	RP-DRU-14N-14L-40K-WC-G2-A	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	NO	✓	✓	3.5" x 11"
	14" Utility Drum Luminaire w/OCC Sensor	RP-DRU-14N-14L-40K-WC-G2-OC1-A	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	YES	✓	✓	3.5" x 14"
	14" Designer Drum Luminaire	RP-DRD-14N-14L-40K-WC-G2-A	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	NO	✓	✓	3.5" x 14"
	14" Designer Drum Luminaire w/OCC Sensor	RP-DRD-14N-14L-40K-WC-G2-OC1-A	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	YES	✓	✓	3.5" x 14"
	18" Designer Drum Luminaire	RP-DRD-18N-14L-40K-WC-G2-A	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	NO	✓	✓	3.5" x 18"
	18" Designer Drum Luminaire w/OCC Sensor	RP-DRD-18N-14L-40K-WC-G2-OC1-A	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	YES	✓	✓	3.5" x 18"
	12" Outdoor Drum	RP-DRO-12N-14L-40K-WC-G2	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	NO	✓	✓	4" x 12"
	12" Outdoor Drum w/OCC Sensor	RP-DRO-12N-14L-40K-WC-G2-OC1	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	YES	✓	✓	4" x 12"
	13" Tough Drum	RP-DRT-13N-14L-40K-WC-G2	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	NO	✓	✓	3.75" x 13"
	13" Tough Drum w/OCC Sensor	RP-DRT-13N-14L-40K-WC-G2-OC1	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	YES	✓	✓	3.75" x 13"
	15" Glass Drum	RP-DRG-15N-14L-40K-WC-G2	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	NO	✓	✓	7" x 15"
	15" Glass Drum w/OCC Sensor	RP-DRG-15N-14L-40K-WC-G2-OC1	**1370** (780-3124)	**10W** (6-22W)	3000/3500/**4000K**	YES	✓	✓	7" x 15"
LED SCONCE	11" Utility Sconce Luminaire	RP-SCD-11N-8L-40K-WC-G2	**816** (780-2130)	**6W** (6-22W)	3000/3500/**4000K**	NO	✓	✓	3.5" x 18"
	11" Utility Sconce Luminaire w/OCC Sensor	RP-SCD-11N-8L-40K-WC-G2-OC1	**816** (780-2130)	**6W** (6-22W)	3000/3500/**4000K**	YES	✓	✓	3.5" x 18"
VOLTAGE: 120-277VAC • 85 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY									

Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:
1. You can easily adjust in field via our FlexWatt & FlexColor internal switches.
2. Have us adjust the FlexWatt & FlexColor at the factory for an additional charge.

LED Linear Stairwell & Corridor Fixture featuring RemPhos' FlexWatt + FlexColor + FlexControl + FlexFixture

EXTRA WIDE
6" WIDTH TO COVER
OLD FOOTPRINT

2FT, 3FT, 4FT

LIVC G2

10W-40W

3000K, 3500K, 4000K

10 YEAR WARRANTY

Check our website DLC QPL LISTED DLC for listing status

LED STAIRWELL/CORRIDOR LUMINAIRE SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	CONTROLER/ OCCUPANCY SENSOR	ETL	DIMENSIONS
STAIRWELL/ CORRIDOR LUMINAIRE	24" Corridor/Stairway	RPT-P-LIVC-G2-2FT-20L-840-FWFC-R-S1	**1994** (1267-4099)	**15W** (10-30W)	3000/3500/**4000K**	NO	✓	4.2" x 6" x 23"
	24" Corridor/Stairway w/Occ Sensor	RPT-P-LIVC-G2-2FT-20L-840-FWFC-OCC-R-S1	**1994** (1267-4099)	**15W** (10-30W)	3000/3500/**4000K**	YES	✓	4.2" x 6" x 23"
	36" Corridor/Stairway	RPT-P-LIVC-G2-3FT-20L-840-FWFC-R-S1	**1994** (1267-4099)	**15W** (10-30W)	3000/3500/**4000K**	NO	✓	4.2" x 6" x 34"
	36" Corridor/Stairway w/Occ Sensor	RPT-P-LIVC-G2-3FT-20L-840-FWFC-OCC-R-S1	**1994** (1267-4099)	**15W** (10-30W)	3000/3500/**4000K**	YES	✓	4.2" x 6" x 34"
	48" Corridor/Stairway	RPT-P-LIVC-G2-4FT-20L-840-FWFC-R-S1	**1994** (1267-5329)	**15W** (10-40W)	3000/3500/**4000K**	NO	✓	4.2" x 6" x 46"
	48" Corridor/Stairway w/Occ Sensor	RPT-P-LIVC-G2-4FT-20L-840-FWFC-OCC-R-S1	**1994** (1267-5329)	**15W** (10-40W)	3000/3500/**4000K**	YES	✓	4.2" x 6" x 46"

VOLTAGE: 120-277VAC • 85 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY

Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:
1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. **2**. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

flexCOLOR

choose from 3 different color temperatures

+

flexWATT

4 wattages in one product

+

flexCONTROL

order without controls, basic or advanced control

Control options

CONTROL READY



All LIVC G2 models come standard as factory enabled to add controls at the factory, in the field or at a later date. Driver comes with 10V dimming and 12V DC power wiring.

BASIC CONTROL

Integrated high frequency, high/low motion and daylight hold-off sensor. Can be mounted behind glass or plastic lens. Contact us for more details.

ORDERING CODES
SENSOR = OCC
REMOTE CONTROL = REMOTE-IR12

ADVANCED WIRELESS CONTROL

We partner with Magnum, avi-on, Philips, Lutron and other intelligent wireless lighting control systems. Contact us for more details.

CONTACT US FOR ORDERING CODES

+

flexFIXTURE

use as a stairwell, strip, vanity or continuous run fixture

Multiple end cap trims available allowing for the LIVC G2 to be used in so many places!



SECURITY END CAP
White metal end cap transforms LIVC into vandal & tamper resistant fixture
RPT-P-LIVC-G2-ENDCAP-SECURITY1

MODERN1 END CAP
Single bar brushed-nickel metal end cap creates a premium elegant look
RPT-P-LIVC-G2-ENDCAP-MODERN1

MODERN2 END CAP
Double bar brushed-nickel metal end cap creates a premium elegant look
RPT-P-LIVC-G2-ENDCAP-MODERN2

LumiCleanse

Introducing LumiCleanse – Lighting to Sanitize. Providing a full line of germicidal lighting to hospitals, schools, hotels, senior living centers and more. With health and safety in mind, LumiCleanse products offer safer, cleaner environments for all.

Effectively eliminates these pathogens

BACTERIA

VIRUSES

MOLD/FUNGI

ALLERGENS

NEW!

216W
LC-UVC-TOWER

- *Up to 2,000 sq. ft. coverage*
- *Ozone-free*
- *Select from 3 timing options – 30 mins, 60 mins or 120 mins*

NEW!

38W
RP-UVC-LC1

Integrated motion sensor on base

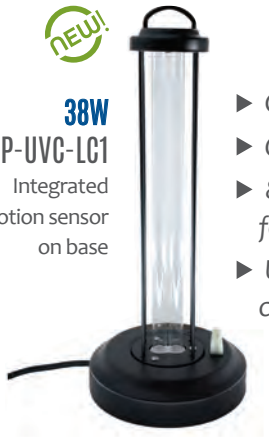

- *Compact design*
- *Ozone-free*
- *8' cord with plug for easy set-up*
- *Up to 300 sq. ft. coverage*

LC-UVC-TRICARD

NEW!

For use only with mercury vapor UV-C (250 - 260nm)



- *Easily track & measure UV-C exposure*
- *Playing card size*
- *Available in packs of 10 cards*

DISINFECTANT LIGHT SPECIFICATIONS

1 YEAR WARRANTY

PRODUCT	DESCRIPTION	Part #	WATT	DIMENSIONS
UV-C1	Ultraviolet Germicidal Quartz Lamp	RP-UVC-LC1-38W	38W	7.5" X 17.5"
UV-C-TOWER	Ultraviolet Germicidal Tower	LC-UVC-TOWER-216W-01	216W	20" X 59" X 14"

VOLTAGE: 120VAC • 1 YEAR WARRANTY

DISINFECTANT LIGHT ACCESSORIES

PRODUCT	DESCRIPTION	Part #
UV-C-DOSIMETERS	Ultraviolet Measurement Cards	LC-UVC-TRICARD-10PK

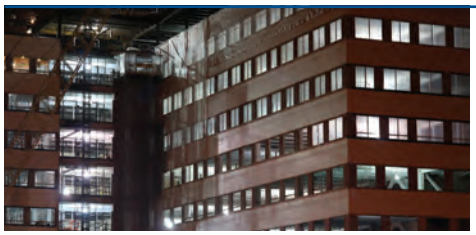

120V Temporary Work Site Lights!

Super bright and durable, our LED work site lights reduce costs and labor with an integrated power cord and daisy-chain feature.

60W
LED-9006
Replaces up to 250W
20' power cord
Connect up to 10 lights together

100W
LED-9010
Replaces up to 400W
35' power cord
Connect up to 6 lights together

150W
LED-9015
Replaces up to 600W
35' power cord
Connect up to 4 lights together

40W
(8W x 5 lights)
LED-9003
Replaces up to 300W Incandescent
50' string length

100W
LED-9009-5C
Replaces up to 400W
clear lens
10' power cord
Connect up to 6 lights together

100W
LED-9009-5F
Replaces up to 400W
frosted lens
10' power cord
Connect up to 6 lights together

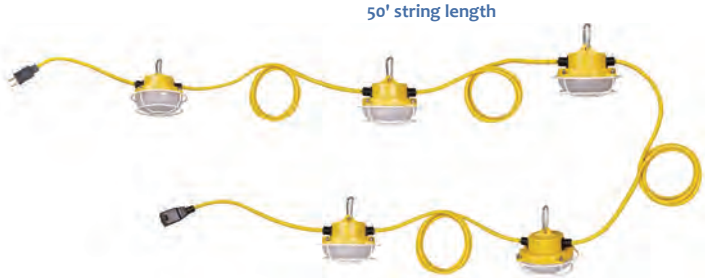

NEW!

80W (8W x 10 lights)
100' string length

LED-9003-163
Replaces up to 600W Incandescent

WORK LIGHTS SPECIFICATIONS

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	ETL	DIMENSIONS
WORK LIGHT 5-PACK	LED-9003-50K-5PK	5000	300W	40W (8Wx5)	NA	5000K		✓	3.0" x 4.4"
NEW! WORK LIGHT 10-PACK	LED-9003-50K-10PK-163	10000	600W	80W (8Wx10)	NA	5000K		✓	
WORK LIGHT w/20' CORD	LED-9006-50K	6600	250W	60W	NA	5000K	✓		10.8" x 6.5"
WORK LIGHT w/35' CORD	LED-9010-50K	11000	400W	100W	NA	5000K	✓		12.2" x 6.5"
WORK LIGHT w/35' CORD	LED-9015-50K	16500	600W	150W	NA	5000K	✓		13.4" x 6.2"
ECONOMY WORK LIGHT (CLEAR LENS)	LED-9009-100-5C	12000	400W	100W	NA	5000K	✓		11.3" x 6.5"
ECONOMY WORK LIGHT (FROSTED LENS)	LED-9009-100-5F	9500	400W	100W	NA	5000K	✓		11.3" x 6.5"

VOLTAGE: 120 • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY*

* LED-9003 is covered by a 3 year warranty.

SOLAR LIGHTS

NEW!

OFF-GRID AREA LIGHT

Go competely off-grid or use a combination of solar power & line voltage with our all new 'Solera Hybrid' fixture. All-in-one design, solar panel and battery are built into the LED fixture.

adjustable solar panel

Completely off-grid

30W
SL-SAL-OG
30W comparable to 250W
Replaceable Battery

7W, 15W
SL-SWL
7W comparable to 50W
15W comparable to 100W

8W, 30W
RP-SAL
8W comparable to 70W
30W comparable to 250W
Replaceable Battery

20W
RP-SFL
20W comparable to 150W
Replaceable Battery

SOLAR SPECIFICATIONS

NEW!

DESCRIPTION	RemPhos Part #	LUMENS	COMPARABLE TO	WATT	CCT	DIMENSIONS
30W SOLAR AREA LIGHT	SL-SAL-OG-30W-50K-SF-BK-G1	5900	250W	30W	5000K	25.8" X 10.55" X 3.23"
7W SOLAR WALL PACK	SL-SWL-7W-40K-BK-G1	700	50W	7W	4000K	9.2" X 7.5" X 4"
15W SOLAR WALL PACK	SL-SWL-15W-40K-BK-G1	1500	100W	15W	4000K	12.2" X 10.2" X 5"
8W SOLAR AREA LIGHT	RP-SAL-8W-50K-SF-GY-G1	1000	70W	8W	5000K	20" X 11.6" X 3.3"
30W SOLAR AREA LIGHT	RP-SAL-30W-50K-SF-GY-G1	6000	250W	30W	5000K	36" X 16.7" X 3.7"
20W SOLAR FLOOD LIGHT	RP-SFL-20W-40K-BK-G1	2000	150W	20W	4000K	16.3 - 21.1" X 28.5" X 10.5"
20W SOLAR POST TOP FIXTURE	RP-SPT-20W-40K-SF-G1	2000	150W	20W	4000K	31.8" X 16.4"
20W SOLAR DISPLAY LIGHT	RP-SDL-20W-40K-BK-G1	2000	150W	20W	4000K	3.8" X 3.8" X 46"
2W BOLLARD FIXTURE	RP-SBL-2W-40K-BK-G1	266	30W	2W	4000K	29.9" X 10.2"
1W SOLAR STEP LIGHT	RP-SSL-1W-40K-BK-G1	20	20W	<1W	4000K	7.9" X 4.8" X 2.5"
4W SOLAR WALL MOUNT LIGHT	RP-SML-4W-40K-BK-G1	400	35W	4W	4000K	8.4" X 5.3" X 2.9"

HYBRID SOLAR SPECIFICATIONS

NEW!

DESCRIPTION	RemPhos Part #	LUMENS	COMPARABLE TO	WATT	CCT	DIMENSIONS
30W SOLAR HYBRID AREA LIGHT	SL-SAL-HYB-30W-40K-SF-BK-G1	5900	250W	30W	4000K	25.8" X 10.55" X 3.23"

NEW!

HYBRID SOLAR AREA LIGHT

adjustable solar panel

Powered by the sun and backed-up by line-voltage

20W
RP-SPT
20W comparable to 150W
Replaceable Battery



20W
RP-SDL
20W comparable to 150W
Replaceable Battery

2W
RP-SBL
2W comparable to 30W
Replaceable Battery

4W
RP-SML
comparable to 35W

1W
RP-SSL
comparable to 20W

30W
SL-SAL-HYB
30W comparable to 250W
Replaceable Battery

SOLAR AREA LIGHT ACCESSORIES

DESCRIPTION	RemPhos Part #
REMOTE (ORDER ONLY IF EXTRA IS NEEDED)	RP-SAL-REMOTE-G1
ROUND POLE BRACKET FOR 8W (FOR SL-SAL)	RP-SAL-BKT-8W-RP-G1
SQUARE POLE BRACKET FOR 8W (FOR SL-SAL)	RP-SAL-BKT-8W-SP-G1
TRUNNION BRACKET FOR 8W (FOR SL-SAL)	RP-SAL-BKT-8W-TN-G1
ROUND POLE BRACKET FOR 30W (FOR SL-SAL)	RP-SAL-BKT-30W-RP-G1
SQUARE POLE BRACKET FOR 30W (FOR SL-SAL)	RP-SAL-BKT-30W-SP-G1
TRUNNION BRACKET FOR 30W (FOR SL-SAL)	RP-SAL-BKT-30W-TN-G1
3" TO 6" POLE MOUNTING (FOR SL-SAL-HYB)	SL-SAL-HYB-BKT-30W-RP-G1
3" TO 6" POLE MOUNTING (FOR SL-SAL-HYB)	SL-SAL-HYB-BKT-30W-SP-G1
3" POLE TENON FOR (FOR SL-SAL-HYB)	SL-SAL-HYB-BKT-30W-TN-3-G1
3" POLE TENON (FOR SL-SAL-HYB)	SL-SAL-HYB-BKT-30W-RT-3-G1
HYBRID WALL MOUNT (FOR SL-SAL-HYB)	SL-SAL-HYB-BKT-30W-WM-G1

ALSO COMPATIBLE W/ SL-SAL-OG MODEL

SAL-REMOTE
motion sensor and time control are programmable via remote

INCLUDED W/ QUICK SHIP MODELS

Round Pole Bracket (RP)

Adj. Slip-Fitter Bracket (SF)

Square Pole Bracket (SP)

Trunnion Bracket (TN)

SOLAR DISPLAY LIGHT ACCESSORIES

DESCRIPTION	RemPhos Part #
7.5" LONG ARM BRACKET	RP-SDL-B1L-LB-G1

Find Your Sales Representative

1 Arctic Sales – AK
907-694-7424

2A Taylored Sales & Marketing – WA
503 714-1500

2B Taylored Sales & Marketing – OR
503 714-1500

3 Sales Lane llc – CA/N. NV
904-404-1670

4 Deco Sales – S. NV
702-257-8075

7 Taylored Sales & Marketing – N. ID
503 714-1500

8 Wilson Sales – UT/S. ID
801-292-4867

9 Desert Sales – AZ
602-268-7008

10A CT Lighting and Controls – CO/WY
303-762-3537

10B Concordia LED – MT
406-899-6073

11 Mountain States Agency – NM
505-867-5805

12A Electra Sales – N. TX
972-554-8200

12B ETEL – S. TX
713-678-4460 - Houston
210-829-7153 - San Antonio
512-914-0858 - Austin

13 Electra Sales – OK
405-543-1924

14 RB Sales Corp. – KS/W. MO
816-350-1114

15 RB Sales Corp. – IA/NE/W. IL
319-373-8877

16 Pioneer Sales Group – MN/ND/SD
763-546-6880

17 Engineered Rep. Inc. – WI
920-751-3922

18 Archibald & Meek – IL
630-833-7377

19 Martin Electrical Sales – E. MO/S. IL
314-966-8659

20 Electra Sales AR – AR/N. MS/W. TN
501-523-4015

21 SMR Gulf Coast – LA/S. MS
281-774-3751

22A IM Sales – AL/FL Panhandle
205-936-8513

22B Bishop & Brogdon – GA
404-494-4333

23 Gorin Cockrell McCoy – FL
800-241-8657

24 E.F. Lombardi – NC/SC
704-227-2890

25 Electrical Sales Assoc. – TN
615-242-2774

26A Riffle & Associate – OH
N. OH - 440-543-8257
S. OH - 513-771-0002

26B LP Chick – KY
502-964-8181

27 New Century Sales – IN
317-334-9697

28 Team Electrical – MI
313-874-1000

29 Paolicelli & Assoc. – PA/WV
412-276-8816

30 Electrical Sales Assoc. – VA
804-282-1864

31 Colerick – MD/W. DC
410-421-9511

32 Synergy Elec. Sales – E. PA/S. NJ/DE
215-428-1130

33 Ascend Sales & Mktg. – Metro NYC/N. NJ
908-320-0333

35 RD Wright – NY North of Westchester
518-966-5980

36 Lighting for Distributors - LFD Solutions
MA/RI/VT/CT/ME/NH
401-323-3467

37 Pacific Rim Connections – HI
808-847-0007

Canada

1 Alliance Marketing LTD
British Columbia
604-205-5284

2 ElectrixWest Agencies, LTD
Calgary - **403-256-8649**
Edmonton - **780-628-5201**

3 Industrial Solutions Network
Saskatchewan/Manitoba
306-242-2599

4 Electrical Sales Network
Ontario
905-795-2525

5 Agence Ricard
Quebec
514-910-8240

6 Focus Electrical Sales
New Brunswick/Newfoundland
Prince Edward Island
506-852-9333

Powering the Switch to **LED**

Distributed By

Light Efficient Design

LIGHT EFFICIENT DESIGN
Corporate Headquarters • Cary, IL | Innovation & Manufacturing Center • Middleton, MA
847.380.3540 • led-llc.com | **sales@led-llc.com**

© 2019 Light Efficient Design, a div. of TADD, LLC