

Push-In Wire Connectors



- OEM Lighting Manufacturing
- Junction Boxes
- Control Panels
- Security/Alarm Systems
- Prefabricated Wiring Systems
- Lighting Retrofits
- Accepts Stranded or Solid Conductors
- Easy to Install - instead of twisting or taping, simply push wires into connector ports -saves you time and money
- Low wire insertion force allows fast, easy connections
- No-twist connection reduces repetitive motion fatigue
- See-thru for visual connection inspection
- Test port for continuity testing
- Electrolytic Tin-Plated Copper internal bus for high conductivity
- Housing Material: Polycarbonate
- UL 94V-2 flame Retardant
- Current: 24A or 32A
- Voltage: 600V
- Working Temperature: 221°F (105°C)
- UL listed for Copper Conductors only

NO TWISTING! JUST PUSH-IN! QUICK & SAFE! REDUCE INSTALLATION COSTS!

12 AWG Push-In Wire Connectors




DIMENSIONS = INCHES

CAT. NO.	PORTS	COLOR	VOLTS	AMPS	WIRE RANGE STRANDED	WIRE RANGE SOLID	L	W	H	BOX/PAIL QTY	CASE QTY
INNER BOX											
23007*	2	RED	600	32	16-12	18-12	.78	.52	.32	100	6,000
23008*	4	RED	600	32	16-12	18-12	.78	.52	.54	100	6,000
BULK PAIL											
23009*	2	RED	600	32	16-12	18-12	.78	.52	.32	8,000	8,000
23010*	4	RED	600	32	16-12	18-12	.78	.52	.54	5,600	5,600

* NOTE: UL LISTED FOR 18-12 AWG ONLY


22-14 AWG Push-In Wire Connectors

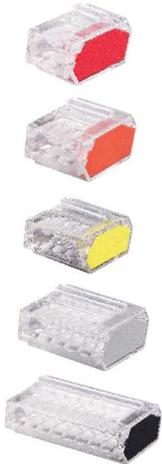

DIMENSIONS = INCHES

CAT. NO.	PORTS	COLOR	VOLTS	AMPS	WIRE RANGE STRANDED	WIRE RANGE SOLID	L	W	H	BAG QTY	CASE QTY
BULK BAG											
23222A	2	RED	600	24	18-14	20-14	.76	.41	.43	250	5,000
23223A	3	ORANGE	600	24	18-14	20-14	.76	.53	.43	200	4,000
23224A	4	YELLOW	600	24	18-14	20-14	.76	.69	.43	150	3,000
23225A	5	GRAY	600	24	18-14	20-14	.76	.83	.43	100	2,000
23228A	8	BLACK	600	24	18-14	20-14	.76	1.25	.43	50	1,000

24-12 AWG Push-In Lever Type Wire Connectors



DIMENSIONS = INCHES

CAT. NO.	PORTS	VOLTS	AMPS	WIRE RANGE SOL/STR	L	W	H	BOX/PAIL QTY	CASE QTY
INNER BOX									
23294	2	24-12	32	24-12	.81	.51	.42	100	6,000
23295	3	24-12	32	24-12	.81	.73	.42	50	3,000
23296	5	24-12	32	24-12	.81	1.17	.42	25	1,500
BULK PAIL									
23297	2	24-12	32	24-12	.81	.51	.42	6,000	6,000
23298	3	24-12	32	24-12	.81	.78	.42	4,000	4,000
23299	5	24-12	32	24-12	.81	1.17	.42	2,300	2,300