


Panel Lights



PANEL LIGHTING

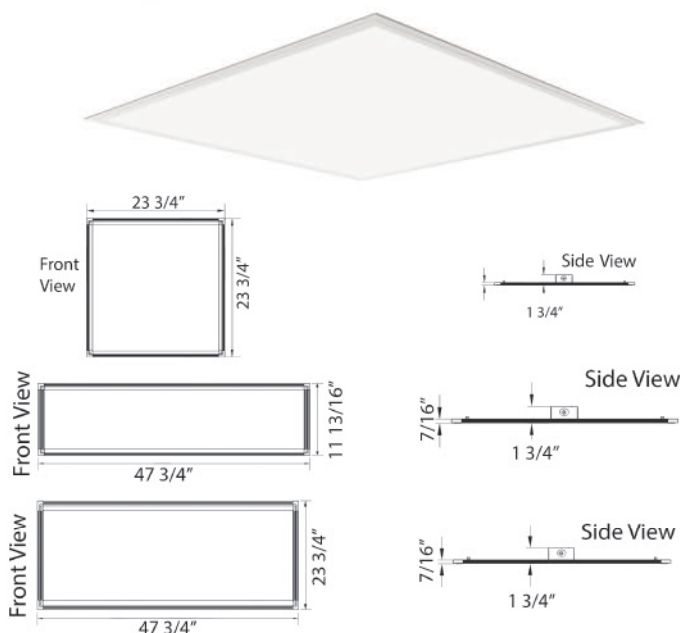

- Ideal for New Construction or Troffer Replacement in Office, Hallway, Conference Rooms etc.
- 0-10V Dimmable
- Compatible with most LED Dimming Systems
- L70: 50,000+ Hrs
- SCDM: <6
- UGR: <22
- PF: >.95
- CRI: >80
- R9: 7-12
- Beam Angle: 120°
- Input Current: .355 -.445A
- THD: 11%@120V; 16%@ 277V
- Aluminum/Zinc Alloy Backplate & Aluminum Frame
- Polystyrene Diffuser
- 6 Step MacAdam Ellipse Binning QC Program
- Input Voltage: 120-277V AC
- Operating Temperature: -4°F to 113°F
- IP20 Dry Location Rated
- 5 year Warranty

Cat. No.	Size	Color Temp	Watts	Delivered Lumens	Lm/w	Replaces Fluorescent	Order In Case Qty	
2x2 DLC 4.2 Standard								
71760	2x2	3000K	40	3747	98	64-128W	4	
71761	2x2	4000K	40	3829	98	64-128W	4	
71762	2x2	5000K	40	4153	106	64-128W	4	
2X2 DLC 4.2 Premium								
71763	2x2	3000K	30	3645	122	64-128W	4	
71764	2x2	4000K	30	3759	125	64-128W	4	
71765	2x2	5000K	30	3721	129	64-128W	4	
1X4 DLC 4.2 Standard								
71750	1x4	3000K	40	3752	98	64-128W	4	
71751	1x4	4000K	40	4014	102	64-128W	4	
71752	1x4	5000K	40	4168	105	64-128W	4	
1X4 DLC 4.2 Premium								
71753	1x4	3000K	40	4761	124	64-128W	4	
71754	1x4	4000K	40	5035	128	64-128W	4	
71755	1x4	5000K	40	5216	130	64-128W	4	
2X4 DLC 4.2 Standard								
71770	2x4	3000K	50	4820	98	128-216W	4	
71771	2x4	4000K	50	5181	102	128-216W	4	
71772	2x4	5000K	50	5486	106	128-216W	4	
2X4 DLC 4.2 Premium								
71773	2x4	3000K	40	5019	125	128-216W	4	
71774	2x4	4000K	40	5103	127	128-216W	4	
71775	2x4	5000K	40	5028	126	128-216W	4	
Mounting Accessories								
71794	1x4 & 2x2			Pendant Mounting System 2 Rope			1	
71796	2x4			Pendant Mounting System 3 Rope			1	
71797	2x2			Surface Mounting Trim Kit (White)			1	
71798	1x4			Surface Mounting Trim Kit (White)			1	
71799	2x4			Surface Mounting Trim Kit (White)			1	