





# Morris CAT#: 71900B

## 2' LED Linear Vapor Tight

### 25 WATT, 3.5K-5K, 120-277V

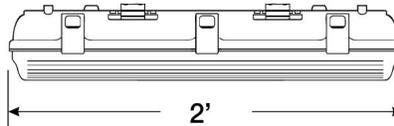

#### Features:

- 0-10V Dimming
- Polycarbonate Lens with high flame retardant paint
- Heavy Duty Polycarbonate Housing & Stainless Steel Clips
- High Quality LED chips provide high efficiency
- Surface Mount Brackets Included
- 50,000+ Hour LED Life Expectancy
- IP65 Wet Location Rated
- cUlus Listed
- 5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/Watt	
71900B	White	25	3,375 @4K	3.5K-5K	120-277	90° x 113°	135	

?bcWci lg.



Side Knockout



Side Knockout with pre-installed cord grip



Center Knockouts

# Morris CAT#: 71900B

## 2' LED Linear Vapor Tight

### 25 WATT, 3.5K-5K, 120-277V

#### Technical Specifications:

##### **Electrical:**

Input Voltage: 120 thru 277

Current: .0.19A@120V

Frequency: 60Hz Power

Factor:  $\geq 0.9$

THD:  $> .20\%$  @ 120V

##### **Product Parameters:**

25 Watts

Efficacy: 135 lumens per watt

3,000 lumens @ 3.5K/5K

3,375 lumens @ 4K

50,000+ LED Life Span

CCT: 3.5K-5K

##### **Chromacity Measurements:**

CRI:  $> 80$

R9:  $-2$

DUV: 0.0019

##### **Component Specifications:**

LED: SMD2835

Driver: 100-277V 50-60HZ

Surge Protection Volts: 1.5KV

**Dimming:** 0-10V

##### **Operating Temperature:**

Minimum Starting  $-22^{\circ}\text{F}$  -  $104^{\circ}\text{F}$

##### **Construction:**

Housing: Polycarbonate Housing and Stainless Steel Clasps

IP Rating: IP65 Wet Location

Lens Material: Polycarbonate Diffused/Frosted Lens

Mounting: Surface Mount Brackets Included, Suspension Chain

Listings: cULus Listed

Carton Qty: 6

Weight: 2.4 lb

##### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).