


Commercial Recessed Lighting Kits

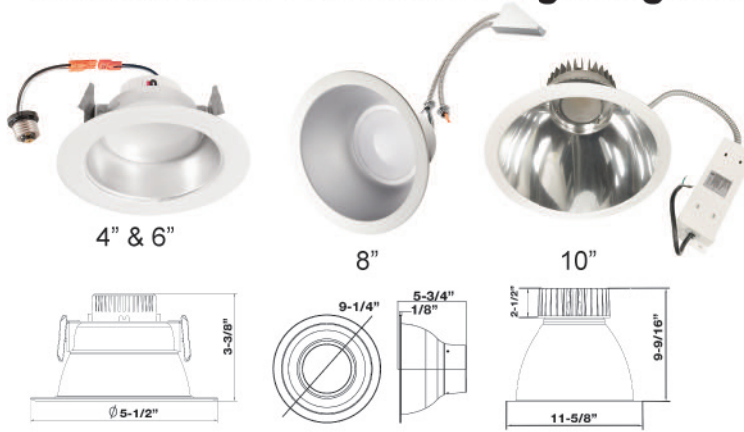


- Ideal for Retrofit Applications
- 0-10V Dimming; Dimmable Down to 10%
- Compatible with most LED dimmers
- Lumileds LUXEON 3030 LEDs
- Aluminum Housing/Trim - Paintable
- 8" & 10" Include 15' Greenfield Wire Whips to Driver and Line Side with box connectors
- Guaranteed Single Bin Color Consistency
- Input Voltage 120-277V
- Operating Temp: -31°F to 122°F
- 50,000 Hour LED Life Expectancy
- IP43 Damp Location Rated
- IC (Insulation Contact) Rated
- 5 Year Warranty

DOWN LIGHTING

Cat. No.	Size	Watts	Color Temp	Beam Angle	Delivered Lumens	CRI	Replaces Incandescent	Case Qty
72656	4"	15	3000K	60°	1138	91	100W	12
72657	4"	15	4000K	60°	1138	91	100W	12
72658	4"	15	5000K	60°	1138	91	100W	12
72659	6"	20	3000K	60°	1456	91	150W	12
72660	6"	20	4000K	60°	1456	91	150W	12
72661	6"	20	5000K	60°	1456	91	150W	12
72662	8"	25	4000K	80°	1706	>80	150W	2
72664	8"	45	4000K	80°	3400	>80	150W	2
72666	10"	30	4000K	35°	2900	>80	150W	1
72667	10"	30	5000K	35°	2900	>80	150W	1
72668	10"	40	4000K	35°	4000	>80	250W	1
72669	10"	40	5000K	35°	4000	>80	250W	1

Surface Mount Lighting Retrofit Kit



- Surface Mount
- Perfect for Residential and Commercial
- New DOB (Driver on PCB Technology)
- Can install in 4" J-Box & most 5" & 6" Downlights
- Hardwire to J-Box OR Screw-In to Recessed Can
- Torsion Spring & Brackets for Can Mounting
- Aluminum Housing/Trim - Paintable
- In-Line Pluggable Disconnect Included
- Guaranteed Single Bin Color Consistency with enhanced illumination uniformity

- TRIAC Dimming Technology
- Dimmable Down to 10%
- Compatible with most LED Dimmers
- Input Voltage: 120VAC
- Beam Angle: 140°
- Operating Temperature: -31°F to 122°F
- 50,000+ Hour LED Life Expectancy
- IP43 Damp Location Rated
- IC (Insulation Contact) Rated
- 5 Year Warranty

Cat. No.	Size	Watts	Color Temp	Delivered Lumens	CRI	Replaces Incandescent	Case Qty
72615	4"	10	3000K	673	>90	75W	12
72616	4"	10	4000K	673	>90	75W	12
72617	4"	10	5000K	673	>90	75W	12
72612	6"	14.5	3000K	1100	>90	100W	12
72613	6"	14.5	4000K	1100	>90	100W	12
72614	6"	14.5	5000K	1100	>90	100W	12