


## Round Head LED Emergency Light

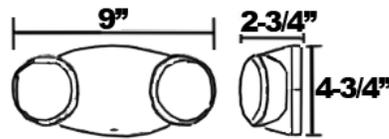

Models 73114, 73115 & 73524 have Remote Capability for up to 2 Additional LED Remote Lamp Heads  
 2 heads - 3 hours operation (Base Unit)  
 3 heads - 2 hours operation (Base Unit + 1 Head)  
 4 heads - 1.5 hours operation (Base Unit + 2 Heads)

- ▶ Fully Adjustable, Glare-Free LED Lamp Heads
- ▶ Long Life Energy Saving LED Lamps
- ▶ Injection-Molded, High Impact, UV-Stabilized
- ▶ UL 94 V-0 Thermoplastic Housing- White
- ▶ Snap-Together Construction Speeds Installation
- ▶ Universal J-box Pattern Mounting Plate with Quick Connect Features
- ▶ 120/277 VAC
- ▶ Test Switch, LED Status Indicator Light
- ▶ Maintenance Free, Rechargeable Ni-Cad Battery
- ▶ 90 Minutes of Emergency Power
- ▶ UL 924 Damp Location Listed
- ▶ 3.6 Volt Sealed Ni-Cad Rechargeable Battery
- ▶ 5 Year Warranty

### Standard

Cat. No.	Color	Lumens Per Head	Width	Depth	Height	Case Qty
73118	White	33	9"	2.75"	4-3/4"	12
73119	Black	33	9"	2.75"	4-3/4"	12

### High Output

73112	White	76	9"	2.75"	4-3/4"	12
-------	-------	----	----	-------	--------	----

### High Output Remote Capable (Use only LED Remote Heads)

73114	White	76	9"	2.75"	4-3/4"	12
73115	Black	76	9"	2.75"	4-3/4"	12


### Standard with Self Diagnostic

73522	White	33	9"	2.75"	4-3/4"	12
-------	-------	----	----	-------	--------	----

### High Output Remote Capable with Self Diagnostic (Use only LED Heads)

73524	White	76	9"	2.75"	4-3/4"	12
-------	-------	----	----	-------	--------	----

## Square Head LED Emergency Light

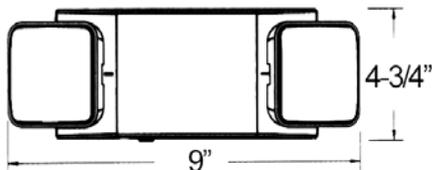

Models 73426 & 73427 have Remote Capability for up to 2 Additional LED Remote Lamp Heads  
 2 heads - 3 hours operation (Base Unit)  
 3 heads - 2 hours operation (Base Unit + 1 Head)  
 4 heads - 1.5 hours operation (Base Unit + 2 Heads)

- ▶ Fully Adjustable, Glare-Free LED Lamp Heads
- ▶ Long Life Energy Saving LED Lamps
- ▶ Injection-Molded, High Impact, UV-Stabilized
- ▶ UL 94 V-0 Thermoplastic Housing- White
- ▶ Snap-Together Construction Speeds Installation
- ▶ Universal J-box Pattern Mounting Plate with Quick Connect Features
- ▶ 120/277 VAC
- ▶ Test Switch
- ▶ LED Status Indicator Light
- ▶ 3.6V 1000/180mAH Maintenance Free, Rechargeable Ni-Cad Battery
- ▶ 90 Minutes of Emergency Power
- ▶ Input Current: .22A @ 120V .10A @ 277V
- ▶ Input Wattage: 1.8W Standard; 2.5W Remote Capable
- ▶ UL 924 Damp Location Listed
- ▶ 5 Year Warranty

Cat. No.	Color	Lumens Per Head	Width	Depth	Height	Case Qty
----------	-------	-----------------	-------	-------	--------	----------

### High Output

73424	White	76	9"	2.75"	4-3/4"	12
73425	Black	76	9"	2.75"	4-3/4"	12

### High Output Remote Capable (Use only LED Remote Heads)

73426	White	76	9"	2.75"	4-3/4"	12
73427	Black	76	9"	2.75"	4-3/4"	12