



RAYZR

10W-100W



Features:

Diecast Aluminum Housing

0.43" thick housing

IP65 Rating

Shatter resistant tempered glass

Note: Fixture includes bracket mount and additional mounting accessories for increased stability.

Product is not dimmable



Part#	Wattage	Lumens	Voltage	Housing Color	CCT	CRI	Lumens/Watt
74200	10W	1000	90-277V, 50/60Hz	Black	5700	80	100lm/w
74201	20W	2000	90-277V, 50/60Hz	Black	5700	80	100lm/w
74202	30W	3000	90-277V, 50/60Hz	Black	5700	80	100lm/w
74203	50W	5000	90-277V, 50/60Hz	Black	5700	80	100lm/w
74204	100W	10000	90-277V, 50/60Hz	Black	5700	80	100lm/w

Additional Technical Specifications:

Wattage	Voltage	Frequency	L70	Current	PF	BUG Rating	Surge Protection
10W	90-277VAC	50/60Hz	>50000H	<0.083	0.9	B1,U2,G0	2000V
20W	90-277VAC	50/60Hz	>50000H	<0.166	0.9	B1,U2,G0	2000V
30W	90-277VAC	50/60Hz	>50000H	<0.252	0.9	B1,U2,G1	2000V
50W	90-277VAC	50/60Hz	>50000H	<0.415	0.9	B2,U3,G1	2000V
100W	90-277VAC	50/60Hz	>50000H	<0.83	0.9	B3,U3,G1	2000V




RAYZR


10W-100W

Dimensions


10W

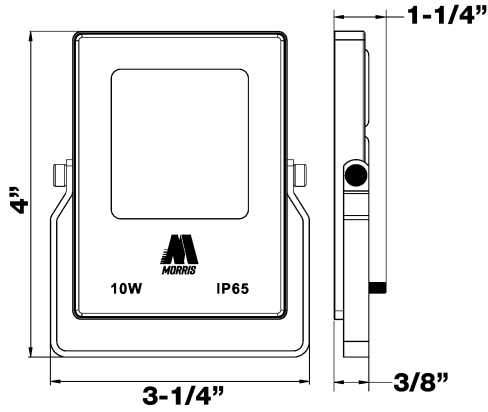


20W

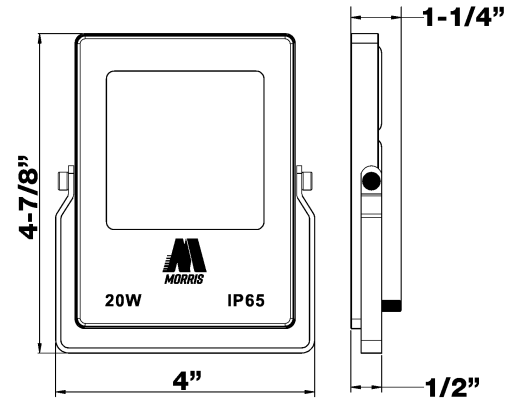


30W

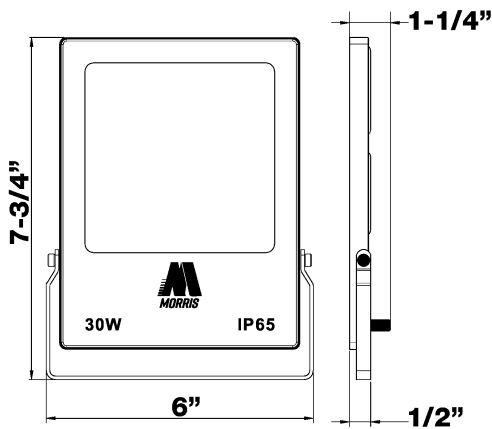

50W

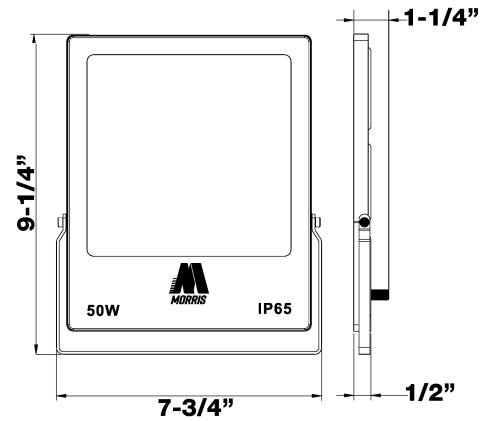

100W

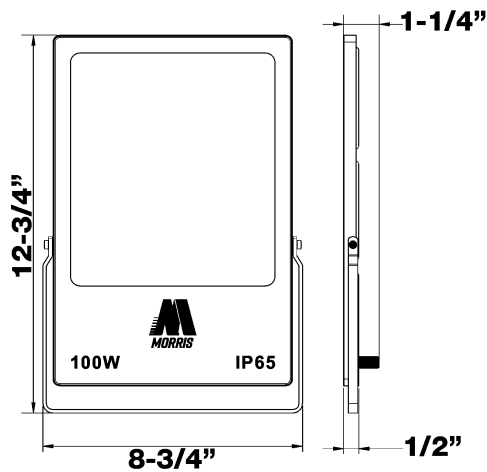



RAYZR

10W-100W

Operating Temperature:

Minimum Starting -40°F to +122°F

Storage Temperature:

-40°F to +176°F

Construction:

Housing: Aluminum Alloy, Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Tempered Glass

Cord and Three Prong Plug included

Mounting:

1 piece bracket. Bracket supports provided for additional stability.

Dimming:

This product is not dimmable

Listings:

ETL Certified

Conforms to UL 1598

Certified to CSA C22.2 No. 250

Blister Pack Qty: 1

Weight:

- 10W = 0.57 lbs
- 20W = 0.74 lbs
- 30W = 1.26 lbs
- 50W = 1.96 lbs
- 100W = 2.82 lbs

Warranty:

Morris Products Rayzr carries a 2 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).