


NEMA C-Face Motors



Standard Motor

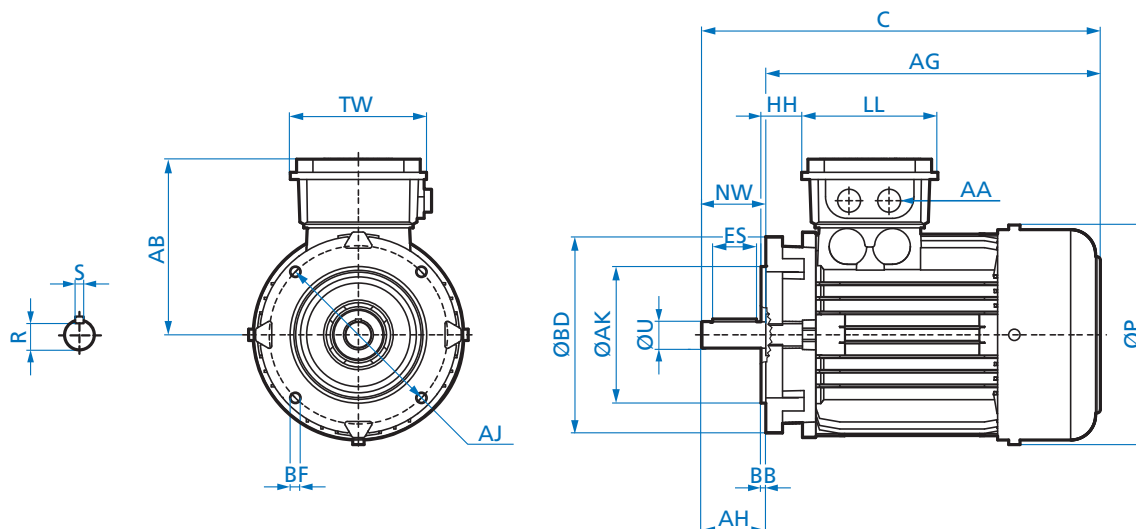

Motor Frame	Efficiency		NEMA Frame	Overall			Flange				
	SE	PE		C	AG	P	AJ	AK	BD	BB	BF
63	S/L	-	56C	9.62	7.56	5.08	5.875	4.500 ^{+0.000} _{-0.003}	6.50	0.16	3/8-16 x 0.71
71	S/L	-	56C	10.49	8.43	5.75	5.875	4.500 ^{+0.000} _{-0.003}	6.50	0.16	3/8-16 x 0.71
80	S/L	LP	56C	11.51	9.45	6.46	5.875	4.500 ^{+0.000} _{-0.003}	6.50	0.16	3/8-16 x 0.87
80	L	-	56C	11.51	9.45	6.46	5.875	4.500 ^{+0.000} _{-0.003}	6.50	0.16	3/8-16 x 0.87
80	-	LP	143TC	11.57	9.45	6.46	5.875	4.500 ^{+0.000} _{-0.003}	6.50	0.16	3/8-16 x 0.87
90	S/L	SP/LP	145TC	13.15	11.02	7.20	5.875	4.500 ^{+0.000} _{-0.003}	6.50	0.16	3/8-16 x 0.71

Motor Frame	Efficiency		NEMA Frame	Shaft							Terminal Box					
	SE	PE		U	NW	AH	ES	R	S		AB	HH	LL	TW	AA (NPT)	AA (METRIC)
63	S/L	-	56C	0.625 ^{+0.000} _{-0.0005}	1.88	2.06	1.69	0.517	0.188		4.53	0.47	3.94	3.94	1/2"	M20 x1.5
71	S/L	-	56C	0.625 ^{+0.000} _{-0.0005}	1.88	2.06	1.69	0.517	0.188		4.88	0.79	3.94	3.94	1/2"	M20 x1.5
80	S/L	LP	56C	0.625 ^{+0.000} _{-0.0005}	1.88	2.06	1.69	0.517	0.188		5.59	1.02	4.49	4.49	3/4"	M25x1.5
80	L	-	56C	0.625 ^{+0.000} _{-0.0005}	1.88	2.06	1.69	0.517	0.188		5.59	1.02	4.49	4.49	3/4"	M25x1.5
80	-	LP	143TC	0.875 ^{+0.000} _{-0.0005}	2.25	2.12	1.81	0.771	0.188		5.59	1.02	4.49	4.49	3/4"	M25x1.5
90	S/L	SP/LP	145TC	0.875 ^{+0.000} _{-0.0005}	2.25	2.12	1.81	0.771	0.188		5.79	1.18	4.49	4.49	3/4"	M25x1.5