



Inductive sensor NI3.5-Q5.5-AN6X




- Rectangular, height 5.5 mm
- Active face on top
- Plastic, PP
- DC 3-wire, 10...30 VDC
- NO contact, NPN output
- Cable connection

Wiring Diagram



Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.

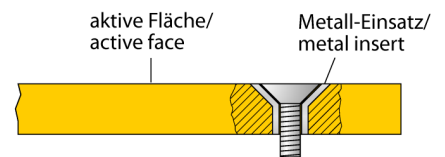

Type designation	NI3.5-Q5.5-AN6X
Ident-No.	4613610
Ident-No (TUSA)	S4613610
Rated switching distance Sn	3.5 mm
Mounting conditions	non-flush
Assured switching distance	≤ (0,81 x Sn) mm
Correction factors	St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4
Repeatability	≤ 2 % of full scale
Temperature drift	≤ ± 10 %
Hysteresis	3...15 %
Ambient temperature	-25...+70 °C
Operating voltage	10... 30VDC
Residual ripple	≤ 10 % U _{in}
DC rated operational current	≤ 150 mA
No-load current I ₀	≤ 15 mA
Residual current	≤ 0.1 mA
Rated insulation voltage	≤ 0.5 kV
Short-circuit protection	yes/ cyclic
Voltage drop at I ₀	≤ 1.8 V
Wire breakage / Reverse polarity protection	yes/ complete
Output function	3-wire, NO contact, NPN
Switching frequency	2 kHz
Construction	Rectangular, Q5.5
Dimensions	28 x 8 x 5.5 mm
Housing material	Plastic, PP-GF20
Tightening torque fixing screw	0.5 Nm
Electrical connection	cable
Cable quality	3 mm, Gray, Lif9Y-11Y, PUR, 2m Suited for E-ChainSystems® acc. to manufacturers declaration H1063M
Cable cross section	3 x 0.14 mm ²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED yellow


Inductive sensor NI3.5-Q5.5-AN6X

TURCK
works

Industrial
Automation

Distance D	3 x B
Distance W	3 x Sn
Distance S	1.5 x B
Distance G	6 x Sn
Distance N	2 x Sn
Distance A	1 x Sn
Distance C	2 x Sn

Width of the active face B 8 mm

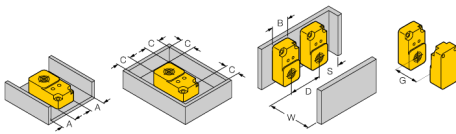

Inductive sensor NI3.5-Q5.5-AN6X



Accessories

Type code	Ident-No.	Description	
MW-Q4.7/Q5.5	6945013	Mounting bracket for rectangular Q4.7 or Q5.5; material VA 1.4401	