



MORRIS CAT#: 71411A

LED CANOPY LIGHT

120-277V, 120W, 4000K-5700K




3-3/8"



2-9/16"

15"

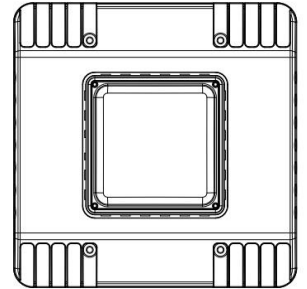

15"

Features:

- Commonly used in gas station, service station, underground parking lot, warehouse, garages etc
- Powder Coated White Color
- Good Heat Dissipation
- CCT Tunable
- Frosted Polycarbonate Lens

5 Year Limited Warranty

IP65 rated



Certification: cULus

DLC PRODUCT ID#: PLNITXTBIL6C

Environment: Suitable for Wet Locations

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC PRODUCT ID #:
71411A	120	120-277	16,000	4K-57K	>80	N/A	Garage	133	PLNITXTBIL6C

PHOTOMETRY

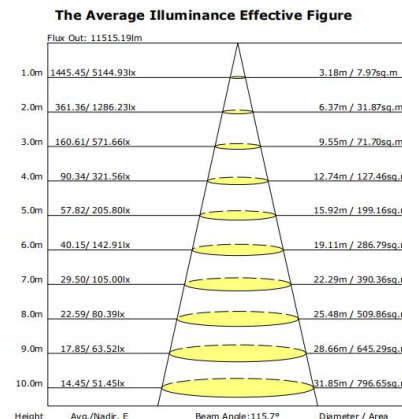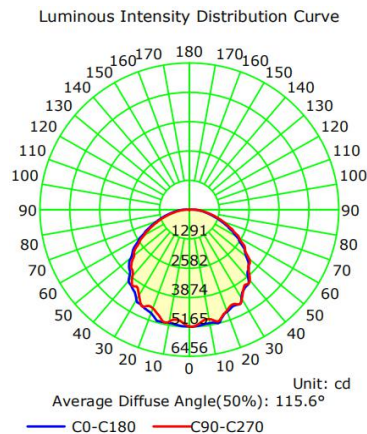



MORRIS CAT#: 71411A

LED CANOPY LIGHT

120-277V, 120W, 4000K-5700K

Technical Specifications:

Electrical:

Input Voltage: 120V-277V

Current: 1.1A@120V

Frequency: 50/60Hz

Power Factor: ≥ 0.98

THD: $\leq 20\%$

Product Parameters:

Input Watts: 120W

Lumens: 16,000

Efficacy: 133 lumens per watt

50,000+ Hour L70 Life Span

CCT: 4000K/4500K/5000K/5700K

Chromacity Measurements:

Beam Angle: 114°

CRI: >82

R9: 11

Component Specifications:

LED: SMD 2835

120-277V, 50-60Hz

Dimming: N/A

Operating Temperature: Minimum Starting: -40°F
to 122°F

Construction:

Housing: Aluminum Alloy Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Polycarbonate

Mounting: Ceiling

Listings:

cULus

DLC PRODUCT ID#: PLNITXTBIL6C

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).