

# PERIMALITER® WALLPACK

PVL3 POLYCARBONATE SERIES

Cat.#

Job

Type



**HUBBELL**  
Outdoor Lighting


Approvals

### APPLICATIONS

- Ideally suited for security lighting applications as well as commercial and architectural exterior wall and area lighting for parking lots, office buildings, stores, shopping centers, fast food restaurants, banks, warehouses, and parking garages

### SPECIFICATIONS

- One-piece polycarbonate front with high performance prismatic optics. Secures to housing gasket with twin Hubbell Gard® captive fasteners
- Die cast aluminum housing allows firm mounting over recessed junction boxes or on flat surfaces for 1/2" surface conduit. Casting dissipates ballast heat for long life. Top hub supplied for field installation of button photocontrol, ordered separately
- Specular aluminum reflector with kicker panels drive maximum lamp lumens to the refractor prisms. Vertical medium base lamp with these optics provide six-to-one spacing-to-mounting height ratio for maximum spacing or better uniformity. Vertical lamp increases both lamp life and output
- Available in 150W HPS and 175W PSMH
- Dark bronze powder paint finish standard on housing, front is painted inside the polycarbonate for lasting appearance

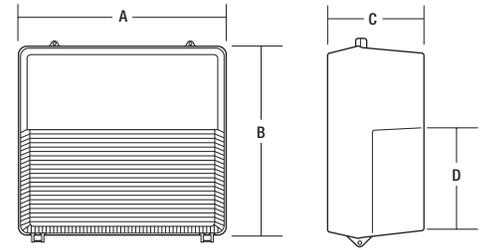

A	B	C	D
147/8"	15"	8"	77/16"
378 mm	381 mm	203 mm	189 mm

### LISTINGS

- Listed to UL1598 for use in wet locations



## STOCK ORDERING INFORMATION

H.I.D. PVL3 Catalog Number	Wattage	Lamp Type	Voltage	Ballast	Lamp Included	Weight lbs. (kg)
<b>High Pressure Sodium</b>						
<b>PVL3-150S-18-BZ-L</b>	150	HPS	Quad Tap	AL-HPF	Yes	20 (9.0)
<b>PVL3-150S-51-BZ-L</b>	150	HPS	120V NPF	HX-NPF	Yes	7 (3.1)

### H.I.D. PVL3

- L - Indicates lamp included with the fixture

## CONFIGURABLE ORDERING INFORMATION



SERIES	SOURCE/WATTAGE	BALLAST	VOLTAGE	COLOR/FINISH	OPTIONS
<b>PVL3</b> Polycarbonate Refractor Wallpack	<b>PULSE START METAL HALIDE</b> 175P 175w <b>HIGH PRESSURE SODIUM</b> 150S 150w	<b>1</b> HX-HPF	<b>5</b> 480V <b>8</b> 120/208/240/277V	<b>DB</b> Bronze <b>WH</b> White	<b>EM</b> Emergency Socket <b>L</b> Lamp included

---

## ORDERING INFORMATION

### ACCESSORIES - Order Separately

Catalog Number	Description
PBT-1	Photocontrol, button type, 120V
PBT-234	Photocontrol, button type, 208, 240, 277V
PVL3V	Full cut-off visor, formed aluminum, bronze finish

### REPLACEMENT PARTS

Catalog Number	Description
200-0180-9904	Polycarbonate front
80033990104	Aluminum/glass front, bronze (glass conversion)

## PHOTOMETRIC REPORTS

Catalog Number	Report #
PVL3-150S-XX-XX	<b>HP01146.IES</b>
PVL3-150P-XX-XX	<b>HP02412.IES</b>